

Product Catalog 20 / 21



Dear Sir or Madam,

We would like to thank you very much for your interest in our lighting product range.

The stated prices are recommended sales prices in euros not including VAT.

If you have any questions about our products, delivery times or custom-made items, please do not hesitate to contact us.

Your	customer	no.:	

Kind regards,
Your **bettee** lighting-manufacturer

Lighting AG
Felix-Wankel-Str. 10
85221 Dachau
Germany

Email: info@betec.de
Phone: +49(0)8131 292656
Fax: +49(0)8131 292651
Web: www.betec.de

Lighting Manufacturer

True to its company slogan – Light for the Future® – betec has enjoyed an excellent international reputation as an innovative lamp manufacturer for 40 years. Its founder and chief designer Horst Lettenmayer, as chairman of the board, is leading the company together with his successor, Ms Julia-Alina Lettenmayer, as a board member, into a new age of lighting. The early and forward-looking decision not to follow the universal trend, but rather individual demands for design and technology was the basis for the success that continues to this day. The wide variety of different designer lamps, each dominating in its respective technological content, was obvious right from the first very product following the company's foundation. The "Clarus" painting lamp was a revolution in lighting in a minimalist guise. It is already a cult product and has received the German Art Protection award (Deutscher Kunstschutz) as well as prestigious international design awards.

Further developments focused on lighting for living spaces, offices and bathrooms, as well as light to showcase architecture. This resulted in lamps to brighten all these areas with "Light for the future®". Our efforts to carry on producing lamps as individual hand-crafted pieces, to take the customer's personal wishes into account and to use carefully selected materials runs counter to the current trend of quantity before quality.



Julia-Alina und Horst Lettenmayer



Quality & Design

All of our lamp models' components are produced in our factory from brass using traditional armoury metalworking. This is done with meticulous craftsmanship, from the selection of the raw materials to their processing right down to the surface treatment. To top it off, each component then receives its own colour treatment. Galvanic processes are carried out in a plant for medical instruments, and all varnishes are hand-varnished and baked at 180° C. A timeless design should also be timeless in its durability.

Brass poliert



24ct Gold poliert



Chrome poliert



Brass mat



24ct Gold mat



Nickel-mat



Black lackiert



Nickel poliert



Brown




Other colors on request.







Article numbers

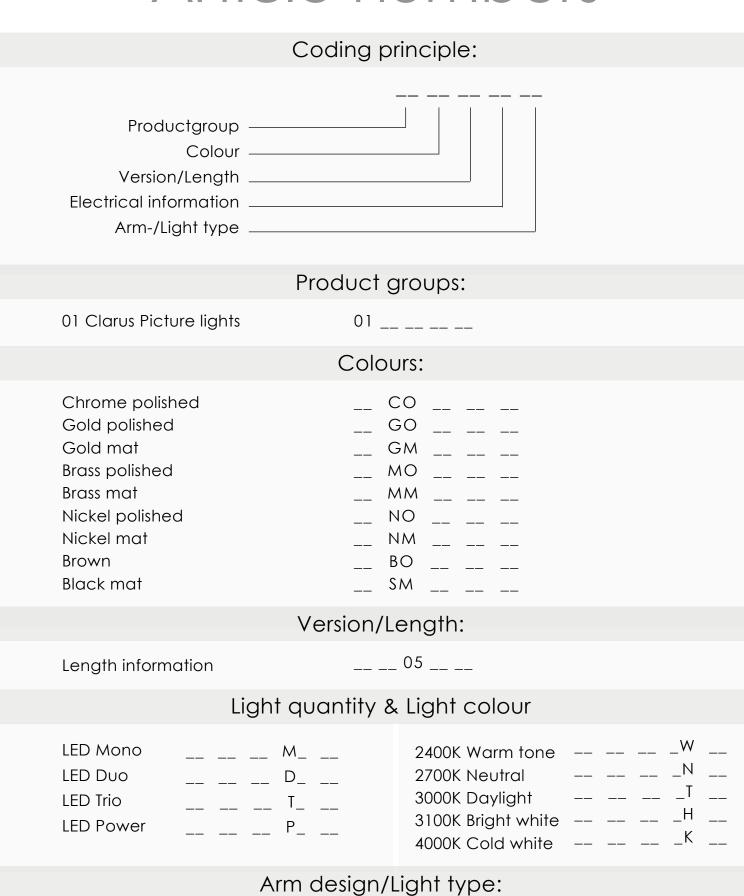

Arms / Types

Index

Page	Picture lights
8 - 11	01 Clarus
12 - 15	04 Angulus
16 - 19	07 Minimus
20 - 21	07 Minimus Mono
22 - 23	17 Maximus
	Desk light
24 - 25	03 Ductus
	Music lighting
26 - 27	33 Piano
	Galerie-System
28 - 29	27 Galerie-Stromschiene
	Table lamps
30 - 31	32 Noctis
32 - 33	11 Obelisk 1200
34 - 35	05 Acus Office
36 - 37	15 Dupplus
38 - 39	11 Centre où
40 - 41	26 Cappello Leuchtschirm
	Floor lamps
42 - 43	05 Acus
44 - 45	11 Obelisk 1900
46 - 47	10 Luxus

Index

Page	Ceiling and wall lights
48 - 49	25 Filum
50 - 51	12 Hamus
52 - 53	30 Folium
54 - 55	09 Palus
56 - 57	10 Luxus
58 - 59	28 Cubus
	Shelf lights
60 - 61	15 Stahlrohrregalleuchte
62 - 63	15 Etagere
64 - 65	15 Vestiaire
	Mirror lights
66 - 67	06 Magnus
68 - 69	06 Make up 3
70 - 71	06 Make up 5
72 - 73	06 Make up 6
74 - 75	06 Make up 7
76 - 77	06 Make up 8
78 - 79	06 Make up 10 Discus
80 - 81	06 Make up 11
	Pool spot
82 - 83	22 Disque
0.4.05	Track systems
84 - 85	16 Planus
86 - 89	19 Galaxis-System
00	Clarine companies to LED
90	Clarus conversion to LED
91	Electronic components
92 - 96	Special lights
98 - 99	Terms and conditions

01 Clarus

The latest advances in lighting technology right now are characterised by LED lamps. Our picture light is equipped with 3000 Kelvin as standard. The highly constant light output alongside low power consumption and an extremely long lifespan are ideal conditions for modern picture lighting. Application: lighting pictures, menus and music stands.

Material: brass, illuminant: single LED, LED efficiency class: A++, Ra: 90, ballast unit 20W: 107 x 41 x 22 mm, primary voltage: 220-240V, secondary voltage: DC 24V, rotatable fluorescent tube: Ø 14 mm, bracket tube: Ø 6 mm

Scope of delivery: whole lamp with illuminant, mounting set and a dimmable ballast unit.

IP20



 ϵ


Colour			Article number	RRP without VAT
Brass polished Brass mat Chrome Nickel polished Nickel mat Brown Black mat Gold 24ct polished Gold 24ct mat		01 MO 01 MM 01 NO 01 NM 01 BO 01 SM 01 GO 01 GM	Same price With surcharge 25%	
Colour	Length	Light output	Article number	RRP without VAT
Brass	160 mm 260 mm 360 mm 460 mm 560 mm 760 mm 860 mm 960 mm 1060 mm	0,5 Watt 1,5 Watt 2,5 Watt 3,5 Watt 4,5 Watt 5,5 Watt 6,5 Watt 7,5 Watt 8,5 Watt 9,5 Watt	01 MO 01 01 MO 02 01 MO 03 01 MO 04 01 MO 05 01 MO 06 01 MO 07 01 MO 08 01 MO 09 01 MO 10 01 MO 11	295 € 325 € 355 € 385 € 415 € 445 € 475 € 505 € 525 € 565 €
LED Mono +	Light colour:		M	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+/ 750Lm/m RA 90+/ 1640Lm/m RA 90+/ 750Lm/m RA 90+/ 1640Lm/m	01 MW 01 MT 01 MH	Same price Same price Same price



Type **11** 110 mm -- 11 Type **17** 170 mm 01 -- -- **17** Type **22** 220 mm Coupling arm



Type 11





Article number



RRP without VAT



Special option touch dimmer

50TD01LD24

55€

Same price

Same price

Same price

Same price





04 Angulus

A novelty in our range of lamps is the "Angulus" picture light. The angular shape of the light fits in more harmoniously with corresponding picture frames. As with all our picture lamps, the lighting profile can be rotated in order to have the optimal light level set. This lamp has a duo LED illuminant, which allowed the light output to be doubled. Particularly suitable as display lighting. Application: lighting pictures, menus and music stands.

Material: brass, illuminant: dual LED, LED efficiency class: A++, Ra: 90, ballast unit: 220-240V, secondary voltage: DC 24V, 12W ballast unit: $94 \times 36 \times 18$ mm, 30W ballast unit: $133 \times 46 \times 24$ mm rotatable fluorescent tube: 17×17 mm, bracket tube: Ø 8 mm

Scope of delivery: whole lamp with diffuser cover, mounting set and a dimmable ballast unit.

IP20



 ϵ

Colour			Article number	RRP without VAT
Brass polishe Brass mat Chrome Nickel polish Nickel mat Brown Black mat Gold 24ct p Gold 24ct m	ned olished		04 MO 04 MM 04 CO 04 NO 04 NM 04 BO 04 SM 04 GO	Same price With surcharge 25%
Colour	Length	Light output	Article number	RRP without VAT
Brass Brass Brass Brass	250 mm 500 mm 750 mm 1000 mm	4 Watt 9 Watt 14 Watt 19 Watt	04 MO 02 04 MO 05 04 MO 07 04 MO 10	360 € 450 € 540 € 630 €
LED Duo + Li	ight colour:		D	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+/1500Lm/m RA 90+/3280Lm/m RA 90+/1500Lm/m RA 90+/3280Lm/m	04 DW 04 DT 04 DH	Same price Same price Same price Same price



Arm Type	Width	Article number	RRP without VAT
Type 15 Type 20 Type 25 Coupling arm	150 mm 200 mm 250 mm	04 15 04 20 04 25	Same price Same price Same price Same price
15 cm Type 15	20 cm Type 20	25 cm Type 25	Coupling arm
Special option touch o	dimmer	Article number	RRP without VAT

EVG -Leuchte -EVG +

50TD01LD24 **55 €**

below® Lighting AG Page 13





betec® Lighting AG Page 15

07 Minimus

As an extension to our "Clarus" lamp, but with a tube diameter of 18 mm, this lamp was developed for the use of a dual LED unit. The double brightness of the "Minimus" is a decisive factor for choosing this product. As a secondary effect, this painting lamp can also be used to brighten rooms. The output light mainly brightens the object in question, but the inevitable scattered light emitted from the lamp fills the room with a basic level of brightness that is an unperceived requirement for our well-being. Application: picture lighting, menu lighting and music stand lighting.

Material: brass, illuminant: dual LED, LED efficiency class: A++, Ra: 90, ballast unit: 220-240V, secondary voltage: DC 24V, 12W ballast unit: 94 x 36 x 18 mm, 30W ballast unit: 133 x 46 x 24 mm, rotatable fluorescent tube: Ø 18 mm, bracket tube: Ø 8 mm

Scope of delivery: whole lamp with illuminant, mounting set and a dimmable ballast unit.

IP20



 ϵ

Colour			Article number	RRP without VAT
Brass polishe Brass mat Chrome Nickel polish Nickel mat Brown Black mat Gold 24ct p Gold 24ct m	ned olished		07 MO 07 MM 07 CO 07 NO 07 NM 07 BO 07 GO 07 GM	Same price With surcharge 25% With surcharge 25%
Colour	Length	Light output	Article number	RRP without VAT
Brass Brass Brass	591 mm 891 mm 1191 mm	10 Watt 16 Watt 22 Watt	07 MO 06 07 MO 09 07 MO 12	440 € 530 € 620 €
LED Duo + Li	ght colour:		D	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+/1500Lm/m RA 90+/3280Lm/m RA 90+/1500Lm/m RA 90+/3280Lm/m	07 DW 07 DN 07 DT 07 DH	Same price Same price Same price



Arm Type	Width	Article number		RRP without VAT
Type 20	200 mm	07 20		Same price
Type 25	250 mm	07 25		Same price
Type 28	280 mm	07 28		Same price
Type 15	150 mm	07 15		Same price
Type 30	300 mm	07 30		Same price
Type 10	100 mm	07 10		Same price
Coupling arm				Same price
20cm 25cm	28cm 15cm	30cm	10cm	•
Type 20 Type 25	Туре 28 Тур	pe 15 Type 30	Type 10	Coupling arm

Special option touch dimmer

Article number

RRP without VAT



50TD01LD24 **55 €**

better® Lighting AG Page 17





belee® Lighting AG Page 19

07 Minimus Mono

The LED picture light with a single central bracket is ideal for small pictures or photos. The light output is very high despite its short length. The lamp can either be attached to the back of the picture frame or to the wall. The level of light can be regulated by parallel rotation of the ends of the tubes.

Material: brass, illuminant: Duo LED, LED efficiency class: A++, Ra: 90, ballast unit: 220-240V, secondary voltage: DC 24V, 12W ballast unit: 94 x 36 x 18 mm, light tube: \emptyset 18 mm, fluorescent tube: \emptyset 8 mm

Scope of delivery: whole lamp with LED illuminant, mounting set and a dimmable ballast unit.

IP20



 ϵ

Design: Horst Lettenmayer © betec

Colour			Article number	RRP without VAT
Brass polishe Brass mat Chrome Nickel polish Nickel mat Brown Black mat Gold 24ct p Gold 24ct m	ned olished		07 MO 07 MM 07 NO 07 NM 07 BO 07 SM 07 GO 07 GM	Same price With surcharge 25% With surcharge 25%
Colour	Length	Light output	Article number	RRP without VAT
Brass	140 mm	2,4W / 528 Lm	07 MO 01	280 €
LED Duo + Li	ight colour:		D	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+/1500Lm/m RA 90+/3280Lm/m RA 90+/1500Lm/m RA 90+/3280Lm/m	07 DW 07 DN 07 DT 07 DH	Same price Same price Same price Same price
Special opti	on touch dimr	ner	Article number	RRP without VAT
EVG - Leuchte -				

EVG -Leuchte -Leuchte + EVG +

50TD01LD24

55 €



17 Maximus

In order to illuminate large paintings with strong frames, a correspondingly larger picture light is required to optically balance the picture and the light. This is why the "Maximus" picture light was created, which can be used for pictures up to several metres wide. Using this lamp as painting or museum lighting also has a secondary effect of brightening the room. The output light mainly brightens the object in question, but the inevitable scattered light emitted from the lamp fills the room with a basic level of brightness that is an unperceived requirement for our well-being. Application: picture lighting, shelf lighting and wall lighting.

Material: brass, illuminant: dual LED, LED efficiency class: A++, Ra: 90, ballast unit: 220-240V, secondary voltage: DC 24V, rotatable fluorescent tube: \emptyset 34 mm, bracket tube: \emptyset 8 mm, ballast unit 12W: 94 x 36 x 18 mm, 30W ballast unit: 133 x 46 x 24 mm

Scope of delivery: whole lamp with illuminant, mounting set and a dimmable ballast unit.

IP20



 $(\epsilon$

Colour			Article number	RRP without VAT
Brass polished Brass mat Chrome Nickel polish Nickel mat Brown Black mat Gold 24ct p Gold 24ct m	ned olished		17 MO 17 MM 17 CO 17 NO 17 NM 17 BO 17 SM 17 GO 17 GM	Same price With surcharge 25% With surcharge 25%
Colour	Length	Light output	Article number	RRP without VAT
Brass Brass Brass Brass Brass Brass	490 mm 650 mm 770 mm 950 mm 1250 mm	8 Watt 11 Watt 13 Watt 17 Watt 23 Watt 29 Watt	17 MO 05 17 MO 06 17 MO 07 17 MO 09 17 MO 12 17 MO 15	430 € 460 € 500 € 550 € 640 € 730 €
LED Duo + L	ight colour:		D	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+/1500Lm/m RA 90+/3280Lm/m RA 90+/1500Lm/m RA 90+/3280Lm/m	17 DW 17 DN 17 DT 17 DH	Same price Same price Same price Same price



Arm Type	Width	Article number	RRP without VAT
Type 20 Type 25 Type 30 Type 10 Coupling arm	200 mm 250 mm 300 mm 100 mm	17 20 17 25 17 30 17 10	Same price Same price Same price Same price Same price
20cm	25cm	30cm 10c	em em
Type 20	Type 25	Туре 30 Туре	e 10 Coupling arm

Special option touch dimmer

Article number

RRP without VAT



50TD01LD24 **55 €**

belee® Lighting AG Page 23

03 Ductus

Lectern, desk or wall lamp with the highest level of precision craftsmanship. Holding brackets come in various shapes and lengths. Either as a plug-in version on lecterns, with mounting collars for installation on walls or for permanent installation on shelves using retaining clamps. Also ideal as a showcase lamp and display panel lighting due to its low current consumption and extremely long service life. Application: picture, menu and desk/lectern lighting.

Material: brass, illuminant: LED, LED efficiency class: A++, Ra: 90, primary voltage: 220-240V, secondary voltage: DC 24V, 20W ballast unit: $107 \times 41 \times 22$ mm, rotatable fluorescent tube: Ø 14 mm, bracket tube: Ø 6 mm

Scope of delivery: whole lamp with LED illuminant, dimmable ballast unit and threaded sleeve with flange.

IP20



 $(\epsilon$

Colour			Article number	RRP without VAT
Brass polished Brass mat Chrome Nickel polish Nickel mat Brown Black mat Gold 24ct p Gold 24ct m	ned polished		03 MO 03 MM 03 CO 03 NO 03 NM 03 SM 03 GO 03 GM	Same price With surcharge 25% With surcharge 25%
Colour	Length	Light output	Article number	RRP without VAT
Brass	160 mm 260 mm 360 mm 460 mm 560 mm 660 mm 760 mm 960 mm 1060 mm	0,5 Watt 1,5 Watt 2,5 Watt 3,5 Watt 4,5 Watt 5,5 Watt 6,5 Watt 7,5 Watt 8,5 Watt 9,5 Watt 10,5 Watt	03 MO 01 03 MO 02 03 MO 03 03 MO 04 03 MO 05 03 MO 06 03 MO 07 03 MO 08 03 MO 09 03 MO 10 03 MO 11	315 € 345 € 375 € 405 € 435 € 465 € 495 € 525 € 555 € 585 €
LED Mono +	Light colour:		M	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+/ 750Lm/m RA 90+/ 1640Lm/m RA 90+/ 750Lm/m RA 90+/ 1640Lm/m	03 MW 03 MT 03 MH	Same price Same price Same price



Arm Type	Width	Article number	RRP without VAT
Type 10	100 mm	03 10	Same price
Type 18	180 mm	03 18	Same price
Type 14	140 mm	03 14	Same price
Type 04	40 mm	03 04	Same price
Coupling arm			Same price
4cm	10cm	14,5cm	17,5cm
	•	*	*
Type 04	Type 10	Type 14	Type 18

Special option touch dimmer

Article number

RRP without VAT



50TD01LD24

55€

33 Piano

LED music stand lamp made of brass with black, flocked switchboard. Every pianist or organist needs good lighting to be able to read their music. This lamp solves the problem of attachment to valuable instruments. It is adjustable in height and attached to a velvet-covered board, which then becomes a music stand. The only wiring is a socket on the bass end of the keyboard. Simply unplug the transformer cable, and the board can be readily removed, together with the lamp, and the piano closed. The fluorescent tube can be rotated and the pianist can adjust the lighting him or herself. Application: music stand lighting, menu lighting.

Material: brass, illuminant: LED, LED efficiency class: A++, Ra: 90, ballast unit: 220-240V, secondary voltage: DC 24V/12W, panel dimensions: 380 x 250 x 12 mm, total weight: 900 g, rotatable fluorescent tube: Ø 14 mm, bracket tube: Ø 6 mm, bracket width: 190 mm


Scope of delivery: whole lamp with LED illuminant, touch dimmer, plug-in power supply (4-metre long cable) and optional black panel.


IP20



 ϵ

Brass	360 mm	2,5 Watt / 240 Lm	33 MO 03 MT19	480 €
Colour	Length	Light output	Article number	RRP without VAT









27 Galerie 2

Connected load for high-voltage lamps 110 – 230 V as well as for low-voltage operation (LED). Installed as a basic fitting all around rooms in the wall-ceiling joint, paintings can be hung at all heights and distances. At the same time, the electricity for a painting lamp is also conducted. The suspension pendants made of 6-mm round aluminium are available in different lengths. By simply turning them 90°, they are locked in the busbar slot and supplied with electricity. The load of each pendant is 5 kg. For higher loads, several pendants should be used where necessary. A height-adjustable picture hook is mounted at the lower end of each pendant. With this equipment, you can custom decorate and illuminate each vernissage. Ideal for walls with wood panelling or fabric covering.

Material: aluminium, colour: white RAL9016, light output: 110-230 V, Ampere: 10, rail dimensions: 36×12 mm, coupling piece dimensions: 40×25 mm, pendant head dimensions: 35×10 mm

IP20



 ϵ

Product	Colour	Length	Article number	RRP without VAT
Track	White	2000 mm	27GS36AS12	216€
As an addition there are the	e following pro	oducts:		
Electric picture pendu- lum with power supply and picture hook	White White	1000 mm 2000 mm	27GP01OO10 27GP02OO10	60 € 85 €
Coupling piece with Electricity feed	White	40 mm	27K\$25PW40	56 €









32 Noctis

As a light pedestal for accentuated room lighting or as an object spotlight for three-dimensional art. Contemporary lighting design lives and breathes on the contrast of light and dark. Optical focal points are thereby emphasised with light.

Material: brass, illuminant: Power LED, LED efficiency class: A++, Ra: 90+, Kelvin: 3000K, base dimension: \emptyset 90 mm, total length: 660 mm


Scope of delivery: whole lamp with integrated ballast unit and touch dimmer.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
360 mm	Brass	3.5 Watt / 172 Lm	32M003PT00	320 €

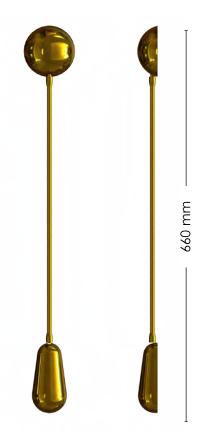



betec® Lighting AG

Page 31

11 **Obelisk 1200**

As a light pedestal for accentuated room lighting or as an objective spotlight for three-dimensional art. Contemporary lighting design lives and breathes on the contrast of light and dark. Optical focal points are thereby emphasised with light.

Material: brass, illuminant: Dual LED, LED efficiency class: A++, Ra: 90+, Kelvin: 3000K, base dimensions: Ø 200 mm, total height: 1200 mm

Scope of delivery: whole lamp with integrated ballast unit and touch dimmer.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
1200 mm	Brass	30 Watt / 1972 Lm	11MO12DT00	580 €
1200 mm	Chrome	30 Watt / 1972 Lm	11CO12DT00	580 €



05 Acus Office

A piece of minimised technology. Aesthetics in motion and workmanship. Clear relationships as to form and functionality. The lamp is attached to the table-top with an elaborately developed, patented clamping foot. The light stand can be raised or lowered as desired. The fluorescent tube's inclination is fully adjustable from a horizontal to a vertical position. In addition, the fluorescent tube, and therefore the light output can be rotated by 140°.

All electronic components as well as the switch are located as a ballast inside the thickened fluorescent tube. The wiring is 2.5 metres in length. Two rocker arms on the lamp make assembly tools unnecessary. The elegant, handmade lamp is destined to be a classic.

Material: brass, illuminant: Power LED, LED efficiency class: A++, Ra: 92+, Kelvin: 3100K, rotatable fluorescent tube: Ø 18 mm, lamp length: 1300 mm, height adjustability: up to max. 800 mm, plate thickness: up to max. 35 mm


Scope of delivery: whole lamp with illuminant and plug-in power supply.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
1300 mm	Chrome polished	16 Watt / 1048 Lm	05CO 13 PT18	960 €

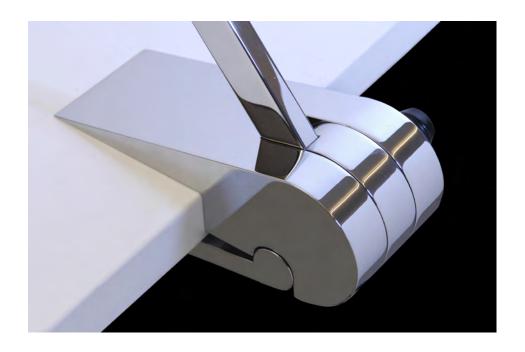





14 Dupplus

An unusual table lamp. The light, which is emitted lengthwise, can be adjusted by turning the fluorescent tubes as desired. Application: lighting objects such as collections and decorations.

Material: brass, illuminant: single LED, LED lifespan: 50,000 hours, light colour: 3000K, Ra: 90+, LED efficiency class: A++, primary voltage: 220V - 240V, rotatable fluorescent tube: \emptyset 14 mm, total height: 470 mm, base dimensions: $85 \times 85 \times 10$ mm

Scope of delivery: whole lamp with illuminant, touch dimmer and plug-in power supply.

IP20



 ϵ

Höhe	Colour	Light output	Article number	RRP without VAT
470 mm	Chrome polished	7 Watt / 672Lm	14CO04MT07	580 €





11 Centre oú

Art needs to be positioned well in a room to be effective. At the same time, the art requires special lighting. The purpose of this source of light is to place the work of art centrally for the viewer. Art does not follow light, but rather light follows art. Sculptures or pictures shape the room with their structure, colour and relief. Their effect is emphasised with this light effigy – from a warmly dimmed glow to bright white floodlights. Harmony of art and light to perfection. The brightness can be adjusted via a dimmer control.

Material: brass, illuminant: dual LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3100K, Ra: 94+, primary voltage: 220V - 240V, primary voltage: 220V - 240V, dimmable: via touch dimmer, rotatable fluorescent tube: \emptyset 18 mm, total height: 950 mm, base dimensions: $100 \times 100 \times 50$ mm

Scope of delivery: whole lamp with illuminant and power supply.

IP20



 ϵ

Design: Dr. Thomas Schrade & Horst Lettenmayer © betec

Length	Colour	Light output	Article number	RRP without VAT
950 mm	Nickel polished	16 Watt / 1011Lm	11NO09DT15	780 €





26 Cappello

The LED era makes it possible to design unconventional lighting. With this lamp, the light is no longer centre stage, but the lampshade itself is the light. Power is supplied via a 2.5 m cable power pack and a miniature jack plug directly in the lampshade, and is switched on and off using a cable switch. If you wish to greet your host with the obligatory champagne bottle in your hand for your next invitation, simply put this lampshade over the bottleneck.

Material: brass, illuminant: LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 2700K, Ra: 94+, primary voltage: 100V - 240V

Scope of delivery: lampshade with LED illuminant and plug-in power supply with rocker switch.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
250 mm	Red	7,5 Watt / 517 Lm	26RT25MN30	160 €
250 mm	Black	7,5 Watt / 517 Lm	26SO20MN30	160 €





05 Acus

Wherever illumination is desired in a room in vertical or horizontal form, this modern light needle expresses innovative elegance. Application: office, object, shop window, or stand lighting lamp for modern sculptures and large paintings.

Material: brass, illuminant: power LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 90+, primary voltage: 220V - 240V, fluorescent tube: Ø 16 mm, base plate: Ø 294 mm, height: 2150 mm

Scope of delivery: whole lamp with illuminant, touch dimmer and plug-in power supply.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
2150 mm	Chrome polished	18 Watt / 1183 Lm	05CO21PT17	680 €



11 **Obelisk 1900**

Light can significantly support the emphasis on focal points in a room. With this graceful light column, walls can be brightened, or silhouettes created, in a targeted manner. All the power components are housed in the lamp's conical base. Application: office, object, shop window, and stand lighting lamp for modern sculptures and large paintings.

Material: brass, illuminant: dual LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 90+, primary voltage: 220V - 240V, fluorescent tube: Ø 34 mm, base plate: Ø 294 mm, height: 1900 mm

Scope of delivery: whole lamp with illuminant, touch dimmer and plug-in power supply.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
1900 mm	Chrome polished	27Watt / 2688Lm	11CO19DT00	880 €
1900 mm	Nickel mat	27Watt / 2688Lm	11NM19DT00	880 €



below® Lighting AG Page 45

10 Luxus

Bright, glare-free table lamp in an "Art Deco" style as a high-quality, hand-made designer lamp. The lamp head can be rotated up to 360° and distributes the light on tables, walls or ceilings in a pleasant way. The "Luxus" table lamp is equipped with 7 power LEDs and is technologically very modern with a retro look.

Material: brass, illuminant: power LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 90+, primary voltage: 220V - 240V, colour rendering index: 90, dimmable: via touch dimmer, base dimensions: $200 \times 200 \times 200$ mm

Scope of delivery: whole lamp with illuminant, plug-in power supply and touch point.

IP20



 ϵ

Length	Colour	Watt/Lumen	Article number	RRP without VAT
650 mm	Nickel polished	21Watt/3000Lm	10NO03PT01	680 €
650 mm	Brass polished	21Watt/3000Lm	10MO03PT01	680 €
1270 mm	Nickel polished	21Watt/3000Lm	10NO04PT01	750 €
1270 mm	Brass polished	21Watt/3000Lm	10NO04PT01	750 €
1850 mm	Nickel polished	28Watt/5850Lm	10NO05PT01	860 €
1850 mm	Brass polished	28Watt/5850Lm	10MO05PT01	860 €





25 Filum

Height-adjustable pendant lighting fixture with touch dimmer and switching technology. Fluorescent tube can be rotated 360° for targeted lighting. The switching and stepless dimming functions are executed by touching the pin in the fluorescent tube. The pendant lamp is suitable for all ceiling heights, since the cable lengths can be individually adjusted. The fluorescent tube is made of brass and then plated in shiny chrome. The geometric counterweight is made of black plastic.

Material: brass, illuminant: dual LED, LED lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 90+, dimmable: touch dimmer, primary voltage: 220V - 240V, secondary voltage: DC 24V, ECG ceiling fixture: 75×70 mm, rotatable fluorescent tube: \emptyset 18 mm

Scope of delivery: complete luminaire with ceiling mount including electronic LED ballast unit in the ceiling fixture and touch dimmer on the fluorescent tube. Pendant cords as standard for a ceiling height of 3.10 metres.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
891 mm	Chrome polished	16 Watt/1536Lm	25CO 09 DT16	720 €
1191 mm	Chrome polished	22 Watt/2112Lm	25CO 12 DT22	860 €
1491 mm	Chrome polished	27 Watt/2688Lm	25CO 15 DT28	890 €





betec[®] Lighting AG

12 Hamus

Wall and ceiling light with an aesthetic plastic housing (polycarbonate). Rotatable, with one or two arms and a 4-watt LED spot. Application: whether as a picture light or as a ceiling spot, this variable, complete lamp fulfils all requirements. The plastic cylinder can be fixed into drywall ceilings.

Material: polycarbonate & brass, illuminant: LED, illuminant base: GX 5.3, efficiency class: A++, secondary voltage: DC 12V, primary voltage: 220 - 240V, 12W ballast unit: Ø 55 x 23 mm

Scope of delivery: whole lamp with integrated ballast unit without LED lamp.

IP20



Spot Halterung

Spot Halterung

 ϵ

White

Black

Design: Horst Lettenmayer © betec

30 €


30 €

Length	Colour	Article number	RRP without VAT
Hamus 1 Hamus 1	White / Nickel Black / Nickel	12WN 01 MN01 12SN 01 MN01	185 € 185 €
Hamus 2 Hamus 2	White / Nickel Black / Nickel	12WN 02 MN01 12SN 02 MN01	245 € 245 €
As an addition there a	re the following products:		
LED Leuchtmittel	2700 K / 4W / 12V / 30°	88LD04OO30	16€

62**WO**01LO00

62**SO**01LO00



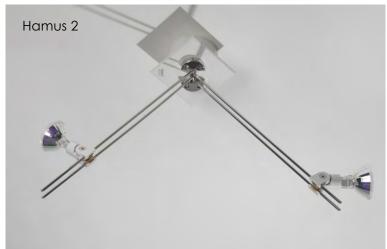



30 Folium

Classic wall lights brighten things up. This lamp's decor takes you on the path of your dreams. As a lamp manufacturer, we not only take care of lighting, but also want to create an atmosphere in which you feel good. Spend your next holidays at home.

Material: powder-coated aluminium, illuminant: power LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 90+, dimensions: 1900 x 180 mm

Scope of delivery: whole lamp with wall bracket and plug-in power supply.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT	
1900 mm	Green/Gold	15 Watt / 986 Lm	30GG19PT00	560€	



betec[®] Lighting AG

09 Palus

Decorative wall lamp with integrated transformer for two light sources. The technical details are excellently supported by the exciting design. A wall and ceiling spotlight that reflects drawings of light as symmetrical patterns on walls and simultaneously covers floor and ceiling. Application: can also be used as a directional aid in offices and public buildings. In cinemas, museums, foyers, private entrances and clinics as wall brighteners, and to give bistros and cafés a better ambience.

Material: painted aluminium, illuminant: LED 2 x 4W, illuminant base: GX 5.3, efficiency class: A++, secondary voltage: DC 12V, primary voltage: 220 - 240V, 12W ballast unit: integrated.

Scope of delivery: whole lamp with 2 LED lamps and wall bracket.

IP20




 ϵ


Design: Horst Lettenmayer © betec

Length	Colour	Light output	Article number	RRP without VAT
400 mm	White	8 Watt	09 WO 02DN02	260 €
400 mm	Red	8 Watt	09 RO 02DN02	260 €
400 mm	Silver	8 Watt	09 AO 02DN02	260 €

The following product is available as illuminant:

Spot 2700 K 4W / 12V / 30° 88LD04OO30 16 €









betec® Lighting AG Page 55

10 Luxus

Powerful, glare-free wall lamp in the style of "Art Deco" as a high quality handmade design lamp. The light head can be rotated up to 360° and pleasantly distributes the LED light on the wall or on the ceiling. The "Luxus" is equipped with 120 Power PCS LEDs. Modern technology in a retro guise.

Material: brass, illuminant: Power LED, RA: 92+, lifespan: 50,000 hours, efficiency class: A ++, light color: 3000K, voltage primary: 220V - 240V

Scope of delivery: Luminaire complete with illuminant and integrated ballast in the wall base.


IP20


F

 ϵ

Length	Colour	Light output	Article number	RRP without VAT
190 mm	Nickel glanz	21Watt/3000Lm	10NO01PT01	360 €
190 mm	Messing glanz	21Watt/3000Lm	10MO01PT01	360 €









28 Cubus

Stylish linear fluorescent LED lamp designed as a modern chandelier in aluminium. Dual strip lights with a 2400 or 3000 Kelvin light colour are located within the U-beams. This way, the core brightness is distributed over a large volume of space without glare. Its unobtrusive design provides harmonisation in both classic arcades as well as modern halls and archways. The light output is 88 watts and can be dimmed steplessly. The acrylic-covered strip lights make this lamp last up to 50,000 hours without maintenance. The length of the suspension pendant can be supplied as per the customer's wishes.

Material: aluminium, illuminant: dual LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 2700K, Ra: 94+, ceiling plate: $40 \times 40 \text{ mm}$, suspension pendant: Ø $18 \times 1200 \text{ mm}$, chandelier dimensions: $1200 \times 400 \text{ mm}$, ballast $2 \times 80W$: $230 \times 51 \times 40 \text{ mm}$

Scope of delivery: whole lamp with built-in LED illuminant, plexiglass cover.


IP20



 ϵ

Design: Gottfried Riesner © betec

Length	Colour	Light output	Article number	RRP without VAT	
1200 mm	Brown	105 Watt / 3520 Lm	28BO12DN04	1900 €	

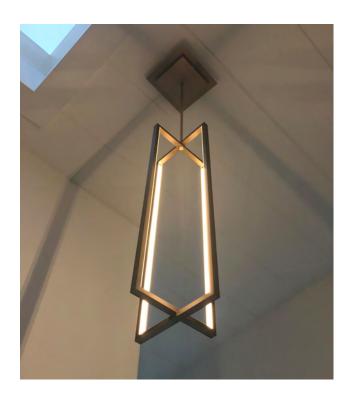



15 Shelf light

As part of the new development of LEDs for lamps and lighting systems, we have developed a shelf lamp with an integrated LED illuminant. Since LEDs offer only advantages when it comes to energy balance, safety requirements and temperature management, this lamp is compatible for use with tubular steel shelves such as USM Haller systems or others. System lengths of 350 mm and 625 mm on request.

Material: brass, illuminant: LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 90+, primary voltage: 220V - 240V, secondary voltage: DC 24V, tube dimensions: Ø 19.3 mm

Scope of delivery: fluorescent tube, including LED illuminant, 2 x drilled connectors, 2 metres of wiring (other cable lengths possible on request), suitable ballast unit. Feed wire for assembly.

IP20



 ϵ

RRP without VAT	Article number	Light output	Colour	Length	
380 €	15CO05MT00	3Watt/288Lm	Chrome polished	500 mm	
RRP without VAT	Article number	products:	there are the following p	As an addition	
12€	15\$T080039		led (hollow screw)	Connector drill	



15 **Etagere**

Shelf lamp for retrofitting. An aluminium angle profile is equipped with a continuous LED strip and a transparent cover. Lamps can also be delivered according to the measurements you need.

Material: aluminium, illuminant: dual LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 2700K, Ra: 94+, primary voltage: 220V - 240V, secondary voltage: DC 24V, profile dimensions: 18 x 18 mm

Scope of delivery: whole lamp with cover and plug-in power supply.

IP20



 ϵ

Length	Colour	Light output	Article number	RRP without VAT
560 mm	Silver Anodized	13 Watt/1760Lm	15AS05DN00	170 €
1000 mm	Silver Anodized	23 Watt/3040Lm	15AS10DN00	200 €





belee® Lighting AG Page 63

15 Vestiaire

The classic wardrobe rail has now turned into wardrobe lighting. High-quality brass tube with two decorative rings enclosed by a continuous LED light strip with a 3000 Kelvin light colour. This lighting makes the often tedious choice of what to wear easier. If the wardrobe doors are closed, the light will then automatically switch on when the doors are opened. On request, the lamp can also be delivered according to the dimensions you need.

Material: brass, illuminant: power LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 92+, primary voltage: 220V - 240V, secondary voltage: DC 24V, tube dimensions: Ø 34 mm

Scope of delivery: whole lamp with two decorative rings and mounting blocks as well as ballast unit. (Cabinet switch will be charged extra)

IP20



 ϵ

Design: Horst Lettenmayer © betec

Length	Colour	Light output	Article number	RRP without VAT
500 mm 500 mm	Brass polished Chrome polished	9,5Watt/625Lm 9,5Watt/625Lm	15MO05PT00 15CO05PT00	380 € 380 €
750 mm 750 mm	Brass polished Chrome polished	19Watt/1250Lm 19Watt/1250Lm	15MO07PT00 15CO07PT00	460 € 460 €

As an addition there are the following product:

Door pressure switch 65DS00LD00 12,60 €





belee® Lighting AG Page 65

29 Magnus

High-quality 6mm crystal mirror with indirect circular LED illumination. Light can be controlled step-lessly with a dimmer switch. The high-quality production takes place in our lamp factory. Highly decorative room element. Optimal in the beauty area as a make-up mirror, or in theatres or hotel areas.

Material: brass, illuminant: Power LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000K, Ra: 92+, mirror shell: Ø 110 cm, mirror: Ø 90 cm

Scope of delivery: complete mirror with illuminant, touch dimmer, ballast unit and wall mount.

IP20

F

 ϵ

Design: Formstelle ©

Product	Colour	Light output	Article number	RRP without VAT
Magnus	Brass polished	95 Watt / 6165Lm	29MO11PT00	3200 €
Magnus	Brass mat	95 Watt / 6165Lm	29MM11PT00	3200 €





06 Make up 3

The illuminated make-up mirror lends every room an exclusive elegance. In addition to the modern design, the warm light of the LED illuminant also provides optimal lighting. These mirror lights frame your reflection with light. Whether you angle the pivotable light to reflect off the mirror or to face you for direct illumination is up to you. These lights are plug-in, so they are easy to access for servicing at any time.

Material: brass, illuminant: single LED, lifespan: 50,000 hours, efficiency class: A++, primary voltage: 220V - 240V, secondary voltage: DC 24V, 2x lamps 880mm & 1x lamp 470mm, 30W ballast unit: 133 x 46 x 24 mm, rotatable fluorescent tube: Ø 14 mm, borehole: Ø 18 mm

Scope of delivery: whole lamp with illuminant and ballast unit without mirror.

IP20



 ϵ

 - -			2 00.g0.0. 20	
Product	Colour	Light output	Article number	RRP without VAT
2x 880mm & 1x 470mm	Nickel polished	16 Watt	06NO03MN 03	1200 €
	Colour		Article number	RRP without VAT
	Brass polished Chrome Nickel polished Nickel mat		06 MO 06 CO 06 NO 06 NM	Same price Same price Same price
LED-Light cold	our:		M	
2400K 2700K 3000K	Warm tone Neutral Daylight	RA 80+ / 750 Lm RA 90+ / 1640 Lm RA 90+ / 750 Lm	06 MW 06 MN 06 MT	Same price Same price Same price
Special optio	n touch dimmer		Article number	RRP without VAT
EVG - Leuchte - EVG + EVG +	•		56TD00LD24	55€



06 Make up 5

Plug-in attachment light in a 24mm-diameter frosted glass tube. Creates optimal light distribution in the mirror, in the room and on the viewer. A flattering, first-class make-up lamp. With a patented LED illuminant. This mirror was developed as a make-up mirror for TV makeup artists. This geometry of the light is supported by the 3-strip LED tube, developed by us, with a beam angle of 3 x 130 degrees. These lights are plug-in, so they are easy to access for servicing at any time.

Material: brass, illuminant: single LED, lifespan: 50,000 hours, efficiency class: A++, primary voltage: 220V - 240V, secondary voltage: DC 24V, fluorescent tube: Ø 24 mm, glass tube: matted glass

Scope of delivery: whole lamp with LED illuminant and dimmable ballast unit without mirror.

IP20



 ϵ

Colour			Article number	RRP without VAT
Brass polished Chrome Nickel polished Nickel mat			06 MO 06 CO 06 NO 06 NM	Same price Same price Same price Same price
Length	Colour	Light output	Article number	RRP without VAT
581 mm 881 mm	Nickel polished Nickel polished	15 Watt 24 Watt	06NO 06 TT05 06NO 09 TT05	400 € 550 €
LED Trio + Liç	ght colour:		T	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+ / 2250 Lm RA 90+ / 4920 Lm RA 90+ / 2250 Lm RA 90+ / 4920 Lm	06 TW 06 TT 06 TH	Same price Same price Same price Same price
Special opti	on touch dimmer		Article number	RRP without VAT
EVG - Leuchte - Leuchte + EVG +	30		56TD00LD24	55 €



06 Make up 6

Inspired by the "Art Deco" era, this form shows classical modesty and cool aloofness. Here, too, you can choose the colour combination you want for the white frosted glass tube and metallic accessory. Double-light fixture, mounted in the mirror. A flattering, first-class make-up lamp. The rotatable LED tubes achieve optimal lighting due to their distance from the mirror. This mirror was developed as a make-up mirror for TV make-up artists. These lamps are plug-in, so they can be accessed for servicing at any time.

Material: brass, illuminant: triple LED, LED lifespan: 50,000 hours, LED efficiency class: A++, primary voltage: 220V - 240V, secondary voltage: DC 24V, fluorescent tube: Ø 34 mm, glass tube: matted glass

Scope of delivery: whole lamp with LED illuminant and dimmable ballast unit.

IP20



 ϵ

Colour			Article number	RRP without VAT
Brass polished Chrome Nickel polished Nickel mat			06 MO 06 CO 06 NO 06 NM	Same price Same price Same price
Length	Colour	Light output	Article number	RRP without VAT
581 mm 881 mm	Nickel polished Nickel polished	15 Watt 24 Watt	06NO 06 TT06 06NO 09 TT06	460 € 610 €
LED Trio + Li	ight colour:		T	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+ / 2250 Lm RA 90+ / 4920 Lm RA 90+ / 2250 Lm RA 90+ / 4920 Lm	06 TW 06 TT 06 TH	Same price Same price Same price Same price
Special opt	tion touch dimmer		Article number	RRP without VAT
EVG - Leuchte - Leuchte + EVG +	, 0		56TD00LD24	55 €



betec® Lighting AG

06 **Make up 7**

Optimal mirror lamp that provides simultaneous room lighting in a classic design. Ideally suited for economical room lighting in guest toilets. The lamp can be mounted either on the wall or on the back of the mirror.

Material: brass, illuminant: triple LED, LED lifespan: 50,000 hours, LED efficiency class: A++, primary voltage: 220V - 240V, secondary voltage: DC 24V, fluorescent tube: Ø 34 mm, glass tube: matted glass

Scope of delivery: whole lamp with LED illuminant, assembly set and dimmable ballast unit.

IP20



 ϵ

Design: Horst Lettenmayer © betec

	Colour		Article number	RRP without VAT
	Brass polished Chrome Nickel polished Nickel mat		06 MO 06 CO 06 NO 06 NM	Same price Same price Same price Same price
Length	Colour	Light output	Article number	RRP without VAT
581 mm 881 mm	Nickel polished Nickel polished	15 Watt 24 Watt	06NO 06 TT07 06NO 09 TT07	450 € 500 €
LED Trio + Lig	ght colour:		T	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+ / 2250 Lm RA 90+ / 4920 Lm RA 90+ / 2250 Lm RA 90+ / 4920 Lm	06 TW 06 TT 06 TH	Same price Same price Same price Same price
Special option	on touch dimmer		Article number	RRP without VAT
EVG - Leuchte - Leuchte + EVG +			56TD00LD24	55 €



betee Lighting AG

06 **Make up 8**

Extremely minimalistic and yet supremely functional. Assembled as one line of light, this lamp brightens entire rooms. Because the light shines both directly and indirectly into the room, there is no need for additional room lighting. The LED version can be rotated so that the brightness level between direct and indirect lighting can be changed. Application: bathrooms, dressing rooms in private areas, as well as in hotels.

Material: brass, illuminant: triple LED, lifespan: 50,000 hours, efficiency class: A++, primary voltage: 220V - 240V, secondary voltage: DC 24V, fluorescent tube: Ø 18 mm, glass tube: matted glass

Scope of delivery: whole lamp with LED illuminant and dimmable ballast unit.

IP20



 ϵ

Design: Horst Lettenmayer © betec

Colour			Article number	RRP without VAT
Brass polishe Chrome Nickel polish Nickel mat			06 MO 06 CO 06 NO 06 NM	Same price Same price Same price Same price
Length	Colour	Light output	Article number	RRP without VAT
586 mm 886 mm 1186 mm	Nickel polished Nickel polished Nickel polished		06NO 06 TT08 06NO 09 TT08 06NO 12 TT08	320 € 380 € 440 €
LED Trio + Lig	ght colour:		T	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+ / 2250 Lm RA 90+ / 4920 Lm RA 90+ / 2250 Lm RA 90+ / 4920 Lm	06 TW 06 TT 06 TH	Same price Same price Same price Same price
Special option	on touch dimmer		Article number	RRP without VAT
EVG - Leuchte - Leuchte + EVG +			56TD00LD24	55€



06 Discus

High-quality crystal mirror with indirect circular illumination with 56 LED modules connected in series. This design has an extravagant feel. The LED ring light will envelop your face in a flattering but honest manner. A prominent shape highlights your prominent features. It is only natural then that this mirror does not tolerate anything in its reflection apart from what it is supposed to show. The light illuminates the person facing it either as a standing version or as a wall mirror. The lamp can be regulated steplessly with a dimmer switch and ballast unit. Application: as a make-up mirror in bathrooms, theatres or hotels.

Material: brass, illuminant: LED, lifespan: 50,000 hours, LED efficiency class: A++, primary voltage: 220 - 240V, mirror circumference: Ø 520 mm, height of the stand: 340 mm, total height: 860 mm

Scope of delivery: whole mirror with illuminant, touch dimmer and ballast unit.

IP20




 ϵ

Design: Horst Lettenmayer © betec

Ty	ype	Colour	Light output	Article number	RRP without VAT
		C C		06CO10MT02 06CO10MT04	1280 € 960 €

LED Mono +	- Light colour:		M	RRP without VAT
2400K	Warm tone	RA 80+ / 750 Lm	06 MW	Same price
2700K	Neutral	RA 90+ / 1640 Lm	06 MN	Same price
3000K	Daylight	RA 90+ / 750 Lm	06 MT	Same price
3100K	Bright white	RA 90+ / 1640 Lm	06 MH	Same price





06 **Make up 11**

Energy-saving LED technology with warm tones ensures pleasant and effective bathroom lighting. The lamp can be attached to any mirror with a max. thickness of 6 mm. Place the mirror lamp profile with the hollow edge on the mirror and tighten onto the mirror rear with the 6 mm screws. Also ideally suited as under-cabinet lighting or counter lighting. Application: bathrooms, dressing rooms in private areas, and in hotels.

Material: aluminium, illuminant: dual LED, lifespan: 50,000 hours, efficiency class: A ++, primary voltage: 220V - 240V, secondary voltage: DC 24V, profile dimensions: 25 x 18 mm, 30W ballast unit: 133 x 46 x 24 mm

Scope of delivery: whole lamp with dual LED lighting, diffuser cover and dimmable ballast unit.

I	P2	0

3000K

3100K

Daylight

Bright white



 ϵ

Design: Horst Lettenmayer © betec

Same price

Same price

Length	Colour	Light output	Article number	RRP without VAT
560 mm 900 mm 1000 mm	Silver anodized Silver anodized Silver anodized	11 Watt 17 Watt 19 Watt	06AS 06 DN11 06AS 09 DN11 06AS 10 DN11	170 € 180 € 200 € 2,45 € per cm
LED Duo + L	ight colour:		D	RRP without VAT
2400K 2700K	Warm tone Neutral	RA 80+ / 1500 Lm RA 90+ / 3280 Lm	06 DW 06 DN	Same price

RA 90+ / 1500 Lm

RA 90+ / 3280 Lm



06 -- -- **DT** --

06 -- -- **DH** --



22 Disque

Swimming pool flood light of high-quality workmanship with powerful LED light output. Energy-saving pool lighting. Installation height 16 mm on each swimming pool wall. Retrofitting is also possible and easy to carry out. Cooling is via colour convection. At 26° C, the LED lamp can be progressively dimmed (PWM ballast unit).

betec swimming pool flood lights can be retrofitted in existing swimming pools. Only 1/10 energy consumption. Very long service life. Minimal installation costs. Because the lamps generate less heat when used underwater, there is no algae growth on the surface. Flood light with complete V4A design. LSG safety glass and safety shutdown when cooling is interrupted (e.g., no water in the pool).

Material: stainless, polished, anti-algae V4A, diameter: Ø 185 mm, depth: 16 mm, illuminant: power LED, lifespan: 50,000 hours, efficiency class: A++, light colour: 3000 Kelvin, colour rendering index: 92+, total: 2500 mA, light field: 700 x 850 mm, angle of light: 130°, range: 8m 50%

Scope of delivery: one flood light with encapsulated power LEDs and plug-in power supply. 5-metre cable.

IP68



 ϵ

Design: Horst Lettenmayer © betec

Length	Colour	Light output	Article number	RRP without VAT
185 mm	V4A polished	21Watt/3000Lm	22VA18PT21	479 €

Installation example:







16 Planus

A complete lighting system with integrated transformer for max. 2 m busbar, which is snapped into the aesthetically shaped cover housing with a clip. The position of the conductor in the housing is variable. Centralised or projecting left-right. The standard Lux 1 spot has a joint that can be tilted by 180°. Version 2 comes with our Lux 3 spot, whose light reaches all areas thanks to a double gimbal joint. Application: lighting system for low ceilings, small rooms such as children's rooms, corridors, cloakrooms, stairwells; can also be used as a decorative wall lamp in cinemas or on columns.

LED efficiency class: A++, illuminant: LED, socket: GX 5.3, 1-30W ballast unit: $133 \times 46 \times 24$ mm, dimmability: limited

Scope of delivery: transformer, busbar with 2 retaining clamps for the rail, spots (Lux 1 or Lux 3) without illuminant. The transformer colour is the same as the rail colour.

Length Colour Article number RRP without VAT 1000 mm White & Nickel 16WN01LD01 402 € 5 x Lux 1 White & Gold 16WG01LD01 440 € Black & Nickel 16SN01LD01 402 € Black & Gold 16SR01LD01 440 € 1000 mm White & Nickel 16WN01LD03 432 € 5 x Lux 3 White & Gold 16WG01LD03 470 € Black & Nickel 16SR01LD03 470 € 2000 mm White & Gold 16WG02LD01 478 € 5 x Lux 1 White & Gold 16WG02LD01 554 € 2000 mm White & Gold 16SR02LD01 554 € 2000 mm White & Nickel 16WN02LD03 508 € 5 x Lux 3 White & Gold 16WG02LD03 584 € 5 x Lux 3 White & Gold 16WG02LD03 584 € Als Zusatz gibt es folgende Spot Halterung mit Sockel GX5.3: RRP without VAT Lux 1 White 69SL010005 28 € Lux 3 Black 69SL030005 3	I	IP20	₹ /	C€	Design: Ho	rst Lettenmayer © be	etec
5 x Lux 1 White & Gold 16WG01LD01 440 € Black & Nickel 16SN01LD01 402 € Black & Gold 16SG01LD01 440 € 1000 mm White & Nickel 16WN01LD03 432 € 5 x Lux 3 White & Gold 16WG01LD03 470 € Black & Nickel 16SN01LD03 432 € Black & Nickel 16SN01LD03 432 € Black & Gold 16SG01LD03 470 € 2000 mm White & Nickel 16WN02LD01 478 € 5 x Lux 1 White & Gold 16WG02LD01 554 € Black & Nickel 16SN02LD01 478 € Black & Gold 16SG02LD01 554 € 2000 mm White & Nickel 16WN02LD01 554 € Black & Gold 16SG02LD01 554 € 2000 mm White & Nickel 16SN02LD03 508 € 5 x Lux 3 White & Gold 16WG02LD03 508 € 5 x Lux 3 White & Gold 16SG02LD03 508 € Black & Nickel 16SN02LD03 508 € Black & Gold 16SG02LD03 508 €		Leng	th	Colour	Article number	RRP without	VAT
5 x Lux 3 White & Gold 16WG01LD03 470 € Black & Nickel 16SN01LD03 432 € Black & Gold 16SG01LD03 470 € 2000 mm White & Nickel 16WN02LD01 554 € 5 x Lux 1 White & Gold 16WG02LD01 554 € Black & Nickel 16SN02LD01 478 € Black & Gold 16SG02LD01 554 € 2000 mm White & Nickel 16SN02LD01 554 € Black & Gold 16SG02LD01 554 € 2000 mm White & Nickel 16WN02LD03 508 € 5 x Lux 3 White & Gold 16WG02LD03 584 € Black & Nickel 16SN02LD03 508 € Black & Rickel 16SN02LD03 508 € Black & Gold 16SG02LD03 508 € Black & Gold 16SG02LD03 508 € Black & Gold 16SG02LD03 584 € Als Zusatz gibt es folgende Spot Halterung mit Sockel GX5,3: RRP without VAT Lux 1 Black 69SL01OO05 28 € Lux 1 White 69WL01OO05 28 € Lux 3 Black 69SL03OO05 34 €				White & Gold Black & Nickel	16WG01LD01 16SN01LD01	4	40 € 02 €
5 x Lux 1 White & Gold 16WG02LD01 554 € Black & Nickel 16SN02LD01 478 € Black & Gold 16SG02LD01 554 € 2000 mm White & Nickel 16WN02LD03 508 € 5 x Lux 3 White & Gold 16WG02LD03 584 € Black & Nickel 16SN02LD03 508 € Black & Gold 16SG02LD03 584 € Als Zusatz gibt es folgende Spot Halterung mit Sockel GX5,3: RRP without VAT Lux 1 Black 69SL01OO05 28 € Lux 3 Black 69SL01OO05 34 €				White & Gold Black & Nickel	16WG01LD03 16SN01LD03	4	70 € 32 €
5 x Lux 3 White & Gold 16WG02LD03 584 € Black & Nickel 16SN02LD03 508 € Black & Gold 16SG02LD03 584 € Als Zusatz gibt es folgende Spot Halterung mit Sockel GX5,3: RRP without VAT Lux 1 Black 69SL01OO05 Lux 1 White 69WL01OO05 Lux 3 Black 69SL03OO05 34 €				White & Gold Black & Nickel	16WG02LD01 16SN02LD01	5 4	54 € 78 €
Lux 1 Black 69\$L010005 28 € Lux 1 White 69WL010005 28 € Lux 3 Black 69\$L030005 34 €				White & Gold Black & Nickel	16WG02LD03 16SN02LD03	5 5	84 € 08 €
Lux 1 White 69WL01OO05 28 € Lux 3 Black 69SL03OO05 34 €		Als Zusatz	gibt es folge	ende Spot Halterung mit S	Sockel GX5,3:	RRP without VAT	
		Lux 1 Lux 3		White Black	69WL01OO05 69SL03OO05		28 € 34 €



betec® Lighting AG Page 85

19 Galaxis

As far as its conductivity and light output capability is concerned, our galaxy system is the smallest low-voltage busbar system on the market. The circular conductor with a diameter of 15 mm integrates two conductor profiles of nickel-plated or gold-plated colour with a single cross-section of 55 mm². This means you can have a long rail control system without a drop in voltage. Single rails can be mechanically and electrically connected using plug pins or coupling shells. The toroidal transformer with 300 VA integrated in the system acts as a voltage source (dimmability is limited). Two triangular plates are used to supply power to the rail and for optimal adjustment within the room.

Transformer: 300 VA toroid with thermal switch and miniature fuse, light output: max. 250 watts, LED efficiency class: C, illuminant: MR16, socket: GX5.3, 300W encapsulated transformer: 140 x 50 x 37 mm, dimmable: yes (electrically), limited suitability for LED lamps

Scope of delivery: transformer, busbar with 2 retaining clamps for the rail, spots (Lux 1 or Lux 3) without illuminant. The transformer colour is the same as the rail colour.

IP20	F	C€	Design: H	lorst Lettenmayer © betec
	Length	Colour	Article number	RRP without VAT
	1000 mm 5 x Lux 1 1000 mm	White & Nickel White & Gold Black & Nickel Black & Gold White & Nickel	19WN01TR01 19WG01TR01 19SN01TR01 19SG01TR01	466 € 552 € 466 € 552 €
	5 x Lux 3	White & Gold Black & Nickel Black & Gold White & Nickel	19WG01TR03 19SN01TR03 19SG01TR03	582 € 496 € 582 €
	5 x Lux 1	White & Rickel White & Gold Black & Nickel Black & Gold	19WN02TR01 19WG02TR01 19SN02TR01 19SG02TR01	532 € 656 € 532 € 656 €
	2000 mm 5 x Lux 3	White & Nickel White & Gold Black & Nickel Black & Gold	19WN02TR03 19WG02TR03 19SN02TR03 19SG02TR03	562 € 686 € 562 € 686 €
A	uls Zusatz gibt es folg	gende Spot Halterung mit	Sockel GX5,3:	RRP without VAT
	Lux 1 Lux 1 Lux 3 Lux 3	Black White Black White	69\$L010005 69WL010005 69\$L030005 69WL030005	28 € 28 € 34 € 34 €



69 Galaxis & Planus


	Product	Version	Colour	Article number	Price
	Lux 1 Clamp spotlight holder - without Illuminant	G4 Socket max. 35 Watt	Black White	69\$L010004 69WL010004	28 € 28 €
	Sockel GX5,3	GX5,3 Socket max. 50 Watt	Black White	69\$L010005 69WL010005	28 € 28 €
	Lux 3 Clamp	G4 Socket	Black	69\$L03OO04	34 €
	spotlight holder - without Illuminant	max. 35 Watt	White	69WL03OO04	34 €
∠/		GX5,3 Socket	Black	69\$L03OO05	34 €
		max. 50 Watt	White	69WL03OO05	34 €
	Pinza 1 Galaxis Rail		Black	69SO01PO00	22 €
	bracket		White	69WO01PO00	22 €
4 mm² max 250 VA	Pinza 2 Galaxis		Black	69SO02PO00	32 €
2 m	Rail bracket incl. electricity feed		White	69WO02PO00	32 €
R	Pinza 3 Planus		Black	69SO03PO00	5 €
	Rail bracket		White	69WO03PO00	5€



69 Galaxis & Planus

The advantage of the galaxy system is that users, architects, planners and project planners can custom-design their lighting concept. Our pin connectors are the latest form of our connection technology, which connects the busbars to one another both mechanically and electrically, but without any effect on the decor. This requires a pin hole in the aluminium conductor.

	Length	Colour	Article number	Price
	1000 mm 2000 mm	White & Nickel White & Nickel	69WN00GL01 69WN00GL02	66 € 132 €
•	For coupling with decor	ative connectors:		
	Thread on one side 1000 mm 2000 mm	White & Nickel White & Nickel	69WN01GL01 69WN01GL02	72 € 138 €
	Thread on both sides 1000 mm 2000 mm	White & Nickel White & Nickel	69WN02GL01 69WN02GL02	78 € 144 €
	For coupling with feed:			
	Pin hole on one side 1000 mm 2000 mm	White & Nickel White & Nickel	69WN01GS01 69WN01GS02	76 € 142 €
	Pin hole on both sides 1000 mm 2000 mm	White & Nickel White & Nickel	69WN02GS01 69WN02GS02	86 € 152 €
30 Ø4,0	Pin connector (Pair)	Brass	69MO10SV18	7 €

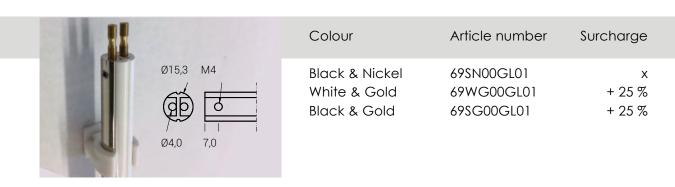

51 Umrüstung Clarus

The EU Lamp Regulation affects both the 100W-80W incandescent lamp and small lamps. In this context, we would like to point out that we can no longer acquire the following festoons: 15V/5W, 18V/5W, 48V/5W

For reasons of increased light efficiency and a significantly increased lifespan of 50,000 hours, we will retrofit your picture lights that have festoon lamps using versions of the latest LED technology. Increased luminous efficacy with only 10% of the previous electricity consumption, without the lamp or the object heating up.

Illuminant: single LED, lifespan: 50,000 hours, LED efficiency class: A++, primary voltage: 220V-240V, secondary voltage: DC 24V, 20W ballast unit: 94 x 36 x 18 mm

For safety reasons, retrofittings may only be carried out by electrical industry specialists. Therefore, you should send your lamp to us for retrofitting.

IP20



 ϵ

Design: Horst Lettenmayer © betec

Length		Light output	Article number	RRP without VAT
265 mm 475 mm 595 mm 725 mm 900 mm		5 x 48V 10 x 24V 13 x 18V 16 x 15V 20 x 12V	51UB 26 MN24 51UB 47 MN24 51UB 59 MN24 51UB 72 MN24 51UB 90 MN24	92 € 107 € 117 € 137 € 152 €
LED Duo + I	Light colour:		M	RRP without VAT
2400K 2700K 3000K 3100K	Warm tone Neutral Daylight Bright white	RA 80+ / 750 Lm RA 90+ / 1640 Lm RA 90+ / 750 Lm RA 90+ / 1640 Lm	51 MW 51 MN 51 MT 51 MH	Same price Same price Same price

Special option touch dimmer Article number RRP without VAT



50TD01LD24

55 €

Electronic components

These are always dimmable via phase start and phase cut. Voltage primary: 220-240V, voltage secondary: DC 24V. Also available in 110V on request.

Power	Dimensions	Article number	RRP without VAT
12 Watt	94x36x18 mm	90VD24LD 12	27 €
20 Watt	107x41x22mm	90VD24LD 20	30 €
30 Watt	133x46x24 mm	90VD24LD 30	47 €
40 Watt	132x44x28 mm 132x44x28 mm 230x51x40 mm	90VD24LD 40	57 €
80 Watt	DR-CV-80 Charlistoner State Grandle William Freq 50-6016 Charlistoner State Gr	90VD24LD 80	77 €

Our external touch dimmer module is attached behind the picture frame and enables lights to be dimmed directly by touching the metal edge.

Power		Article number	RRP without VAT
70 Watt	50x18 mm	50TD01LD24	55€
	EVG - Leuchte - Leuchte + EVG +		

Project Borgeaud bibliotheques, Médiathèque l'Apostrophe Chartres

March 2007







This light meets high photometric and aesthetic demands for the areas of architecture, interior design and the treatment of furniture. The ideal bookshelf lighting.

Project Théâtre du Capitole Toulouse

February 2002







If large paintings with powerful images are illuminated, a great picture light is required for the optical balance between the image and the light. Our "Maximus" can be adapted to optimally illuminate images with widths of several meters.

"Ruhe Christi" Church Rottweil

Februar 2018








A betec was installed in the church in 1715 to illuminate the music of the new "Klais Organ" Organ-light installed. This lamp harmonises ideally with the Swabian Baroque.

"Hotel de Paris" in Monaco

Dezember 2019







All of the painting lighting in the suites and rooms of this renowned hotel support the aura and well-being of the guests.

Project Phoenix Restaurant at the Dreischeibenhaus Düsseldorf

February 2016







Special lights made of stainless steel V2A with Halogène bulbs. Design and production of 30 hanging lights and table lamps with fabric-covered cables, designed by the company Kromayer. The perforated metal cylinders have been manufactured and enameled by a German contractor.

Project suburban railway station in Untermenzing

December 2005







Long distance light for indoor and outdoor area lighting with fluorescent tubes. The light housing is made of anodised aluminiu. The position of reflectors makes it possible to reflect 100% of the light output of the tube onto a flat surface. At the same time, permanently mounted tubes serve as a handrail strip.

Library Technical University Garching

December 2017







Customization of the desk lamps with movable arm and console, including USB plug, on/off switch and Socle. 7 Watt, 4000 Kelvin LED light. Surface paint colour DB702.

Archbishop's Ordinariate / Palais Holnstein

September 2017







Wall lamp in the courtyards of the Archbishop's ordinariate. Design: Walter Bamberger / Technical implementation: betec Licht AG

Chandelier LED April 2017







This chandelier was produced for a construction project in Munich, according to the design of Mr. Gottfried Riesner. We are pleased to continue to include this pendant light in our standard range.

"Salle des illustres" in Toulouse, Picture lighting and ceiling spotlights

Februar 2016







When large and powerful paintings should be illuminated, a larger picture light is used for the optical balance between the image and the light. Our "Maximus" can be customized to optimally illuminate images with widths of several meters.

General standard terms and conditions

- 1. General: with the order confirmation the buyer accepts our delivery conditions to be legally binding unless deviations hereto we agreed to before in writing. They are applicable without any exception in those cases in which the buyer regards his conditions as the only decisive ones. Our silence in regard to the conditions of the purchaser can under no circumstances beregarded as acceptance of same. Any non-compliance with our conditions by the purchaser authorizes us to take the necessary legal steps. Every agreementwith us or our representatives needs our written confirmation. Theuse of the Uniform Laws of 17. July 1973 on !he International Purchase ofmovable items and the closing of International Purchase Orders is excluded.
- 2. Offers are subject to alteration without notice and are not binding inregard to delivery. We can neither be held responsible for malshipments due to misunderstanding in telexes, telephone, cable, fax or oral information norfrom otherwise incomplete or unclear statements, documentation, drawings, samples etc.
- 3. Prices are ex works, excluding packaging, plus VAT. The agreed prices are based on the cost factor existing at the time of ordering. We retain the rightto price corrections in case the cost factors change due to wage- and materialprice increases, additional working steps in special makes, etc.
- 4. The duty to deliver will not be cancelled through delayed partial shipmentsor constant objections, especially in case of custom-made items, Contractcompleted orders are subject to recall within the agreed period, at the latestafter six months. Thereafter we are entitled to either deliver the remainder of the order or cancel the rest.a) A return of goods will only be credited in case of previous consent. The undamaged perducts in original packaging will be credited with 80% of the invoice price. Necessary extra work and packaging costs plus transportationcharges will be subtracted without any prior notice. Custom-madeperducts will not be reaccepted.b) The minimum order value for any shipment is € 50,-(without VAT). Fordeliveries below this amount a perportionate percessing charge of € 10,-(excl. VAT) plus the packaging and shipment costs will be charged.c) Whenever planning or perduction of special equipment became necessaryfor the make of the cancelled goods, then those costs will also have tobe reimbursed completely; furthermore expenses for any prematerial plustheir respective stock and administration charges as far as not intended forany other purpose. Any failures resulting from force majeure or disturbancesinternally or at our suppliers' plus non-compliance with our payment conditions does not release us from our duty of delivery and justify noclaims for compensation. Basically, we can only be bound to delivery if thecredit-worthiness of the purchaser is beyond all doubt. A basic ruling ofthis company is that first orders are subject to C.O.D. deliveries. Our newcustomers therefore allow us with their first order to send an advanceinvoice at the latest when goods are ready for shipment which they may regulate with discount. After receipt of payment we will then immediately undertake the shipment. For slow customers the C.O.D.-delivery remains ineffect.
- 5. The given delivery time is dependent upon the prerequisite of a smoothbusiness course and an even perduction run together with the timelyreceipt of necessary raw materials. Our information is calculated from thedate of confirmation, resp. clarification of all details and refer to the shipmentdate ex works. An extension of delivery time may be given, e.g. if thepurchaser does not keep our business conditions.6. Tolerances in regard to measurement and material are to be granted asis common also for those according to drawings. Claims exceeding these are subject to a respective surcharge.
- 7. Special makes, differing from the standard version can only be considered if included in the order or furnished with an order no. If a special perduct- in spite of most careful planning and calculation can not be madeas laid down in the offer, the purchaser is not entitled to ask for damages. Any costs for the make of tools and samples are to be reimbursed in anycase.
- 8. Packaging is invoiced at prime cost and due to lack of regulations is donein our judgment. The permpt acceptance of the goods through the PostOffice, Railway etc. confirm the faultless packing of our goods.

- 9. Dispatch of goods takes place on account of the purchaser: The riskis transferred to the purchaser the moment the goods leave the factory, disregarding whether free of charge, fob or CIF shipments were agreed. If nospecial transportation mode and no special way are specified, we select thetransportation means ourselves. Foreign carriage cannot be compensated. We cannot be held liable for any delays or additional costs for the transportation. We are at all times entitled to shipment by C.O.D., ask for advancepayment resp. insure the goods for a small fee.
- 10. Complaints in regard to number resp. quality of goods can only beconsidered, if they were handed in in writing within 7 days after receipt ofgoods. Evidently faulty goods that are still in the shipment state, will be replaced or reworked only irrespective the right to reduce the remunerationor cancel the order when failing the afterwork or replacement delivery, ifgoods are being returned to us within the permissable complaint period and amounts to more than 5% of the whole shipment. A return of shipped goods may only take place with our consent. All replacedgoods will come into our ownership. Further claims, espec.damages, reimbursement of wages and materials are excluded. Our liability for all faults will expire if the purchaser of our perducts mixes them with items of different origin, reworks himself faulty perducts or does not meethis contractual obligations. Lamps are technical working means according to the perduct safety law and may only be used for their intended purposes. Any use of lamps and supplementary parts contrary to their purposeas well as unauthorized changes on our lamps without our prior writtenconsent releases us from all liabilities in case of damage. For losses anddamages during transportation the recipient must have those immediately certified with the trainor post office authorities and file claims for compensationthere.
- 11. Reservation of Title. We retain the right of ownership of the deliveredgoods, even if subsequently treated, until the fulfillment of all claims from his contract. Even if our goods will be connected with other items, the purchaser may only sell the goods under reserved title. Claims from a resaleof the reserved goods are to be ceded irrevocably to us in the amount of our claims including interest and costs. In case of possible inability ofpayment, composition settlement or even pledging resp. bankruptcy of thepurchaser, same is bound to return the reserved goods unasked and free ofcharge. Pawning, pertective conveyance or a sale of the reserved goods is excluded. We retain the right to reclaim the reserved goods until their fullpayment. The enforcement of § 28 VO is excluded.
- 12. Our invoices are payable within 14 days from invoice date with 2% discounton the net perduct value or within 30 days net to one of the accountsmentioned on the next page or by cheque to our address. With C.O.D.shipments and immediate advance payment we grant 2% discount on thenet perduct value. We will not accept bills of exchange. Only after their discharge will cheques be regarded as payment. Bank discounts or otherexpenses are to be charged to the customer. Deductions for transportationor packing costs are inadmissible. Payments because of complaints mayunder no circumstance be delayed. In case a purchaser does not meet hisliabilities, we are entitled to stop further shipments until complete payment. Whenever the deadline for outstanding payments is exceeded, thepurchaser - without being specially informed by us - will be levied with aninterest that is common for unpaid credits with banks. Extension of time, counterclaims or retention of partial payments, no mater what the reasonmay be, are excluded without our prior written consent. All expenses arising from a reminder, delayed payment, confiscation or non-acceptanceof ordered goods must be borne by the purchaser. Any telephone/cablecharges, etc. by the purchaser are also excluded.
- 13. The guarantee for our perducts amounts to 24 months. Longer-lastingguarantees must be agreed separately. The guarantee does not refer tobulbs and transformers.
- 14. Place of performance for shipments and payments is Munich exclusively. The law of Germany applies to our delivery conditions and all legal connections between the purchaser and us.
- 15. Special regulations or any possible legal ineffectiveness of individual points of these delivery conditions do not infringe the validity of the others.

Imprint

Chairman: Horst Lettenmayer Board of Directors: Julia-Alina Lettenmayer

Bank details:

V

Volksbank Raiffeisenbank eG IBAN: DE87700915000000414689

BIC: GENODEFIDCA



Postbank München IBAN: DE70700100800081366800

BIC: PBNKDEFF



Commerzbank München IBAN: DE28700400410669930000

BIC: COBADEFFXXX



Sparkasse Fürstenfeldbruck IBAN: DE17700530700031764806

BIC: BYLADEM1FFB



PayPal Recipient: info@betec.de

All lights deviating from this range are special lights and are offered with corresponding surcharges. Initial orders are only carried out against prepayment. Technical changes reserved. All images and all texts are copyrighted by © betec.

Commercial register number: HRB133087, VAT ID: DE129301236

Product photographer: Eugen Haller, photo Sessner Texts: Horst Lettenmayer, layout: Julia-Alina Lettenmayer

bettee Lighting AG
Felix-Wankel-Str. 10
85221 Dachau
Germany

Email: info@betec.de Phone: +49(0)8131 292656 Fax: +49(0)8131 292651 Web: www.betec.de

Follow us @beteclichtAG







