

MY OUTDOOR «LED» WALL LAMP

MyWhite



MyWhite



MYWHITE__is a family of wall lights and ceiling light fixtures designed for exterior spaces but also suitable for interiors characterized by an essential and clean design. They are perfect to create evocative compositions that can enhance any environment.

LLDPE__Enveloping light emanating from a pure linear polyethylene body: produced by rotational moulding, the material is UV resistant, does not turn yellow or deteriorate, and helps ensure optimal light distribution.

RANGE__This product family comes in various shapes and sizes featuring different power outputs, luminosity levels and color temperature suited for a wide variety of applications. Sources that illuminate the facades and the perimeters of residential buildings, line pathways with lights or safely guide you through an underpass.


VERSATILITY__My White is also MiniWhite, a range of small, extremely compact square or round wall lights. These minimal, bright jewels can be arranged in extremely creative patterns. The latest addition to the family, the brand new MyWhite versions are fitted with presence sensors making them ideal for the illumination of passageways or with auxiliary power supply.

BRAND NEW__A bright new element complements the My White family. With its simple but creative design, MyWhite_U gives a fresh interpretation of the concept of outdoor lighting: a touch of originality combined with LED technology within a durable and reliable structure, designed for the illumination of facades, porches and passageways.


MyWhite_U




Dimensions

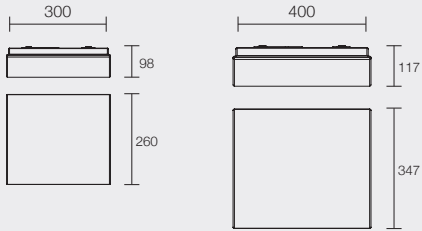


MyWhite_O




MiniWhite_R | MyWhite_R










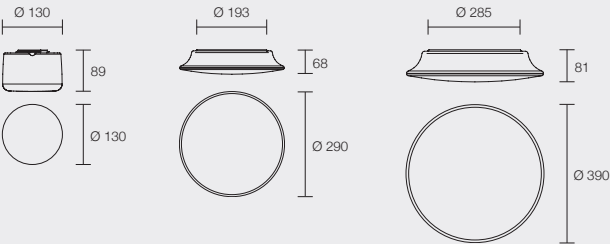


MiniWhite_Q | MyWhite_Q

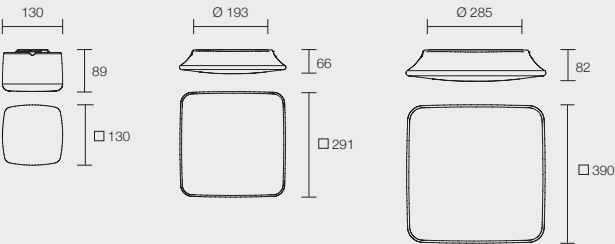


MyWhite_B

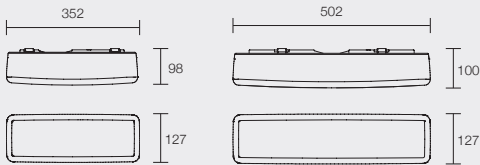


Watt	Version	Illuminance
MyWhite_U 11 W MyWhite_U 17 W	ON OFF ON OFF	MiniWhite_U 11 W  Lighting Area = Ø 12 m. MyWhite_U 17 W  Lighting Area = Ø 12 m.
MyWhite_O 8 W	ON OFF	MyWhite_O 8 W  Lighting Area = 20 x 12 m.
MiniWhite_R 4 W MyWhite_R 10 W MyWhite_R 16 W	ON OFF ON OFF ON OFF EM	MiniWhite_R 4 W  Lighting Area = Ø 21 m. MyWhite_R 10 W  Lighting Area = Ø 10 m. MyWhite_R 16 W  Lighting Area = Ø 10 m.
MiniWhite_Q 4 W MyWhite_Q 10 W MyWhite_Q 16 W	ON OFF ON OFF ON OFF EM	MiniWhite_Q 4 W  Lighting Area = Ø 21 m. MyWhite_Q 10 W  Lighting Area = Ø 10 m. MyWhite_Q 16 W  Lighting Area = Ø 10 m.
MyWhite_B 7 W MyWhite_B 11 W	ON OFF ON OFF EM	MyWhite_B 7 W  Lighting Area = 31 x 11 m. MyWhite_B 11 W  Lighting Area = 31 x 11 m.

MyWhite_U | ceiling-wall | TopLED | 11 W 220-240 V



type	colour	optics
White CRI85 7889	3000 K 1246 lm	Diffused


MyWhite_U | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7890	3000 K 1800 lm	Diffused




MyWhite_O | ceiling-wall | TopLED | 8 W 220-240 V



type			colour		optics
White	CRI85	8027	3000 K	970 lm	Diffused
White	CRI85	8027N	4000 K	970 lm	Diffused




MiniWhite_R | ceiling-wall | TopLED | 4 W 220-240 V





type		colour		optics
White	CRI85 8028	3000 K	400 lm	Diffused
White	CRI85 8028N	4000 K	400 lm	Diffused

MyWhite_R | ceiling-wall | TopLED | 10 W 220-240 V




type		colour		optics
White	CRI85 7805	3000 K	1122 lm	Diffused
White	CRI85 7805N	4000 K	1122 lm	Diffused

MyWhite_R | ceiling-wall | TopLED | 16 W 220-240 V




type		colour		optics
White	CRI85 7806	3000 K	1598 lm	Diffused
White	CRI85 7806N	4000 K	1598 lm	Diffused

MyWhite_R | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7806S****colour**

3000 K 1598 lm

optics

Diffused

motion
sensortime
3 min.sensitivity range
Ø 5 m. H 2,7 m.**MyWhite_R** | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7806E****colour**


3000 K 1598 lm

optics


Diffused



emergency

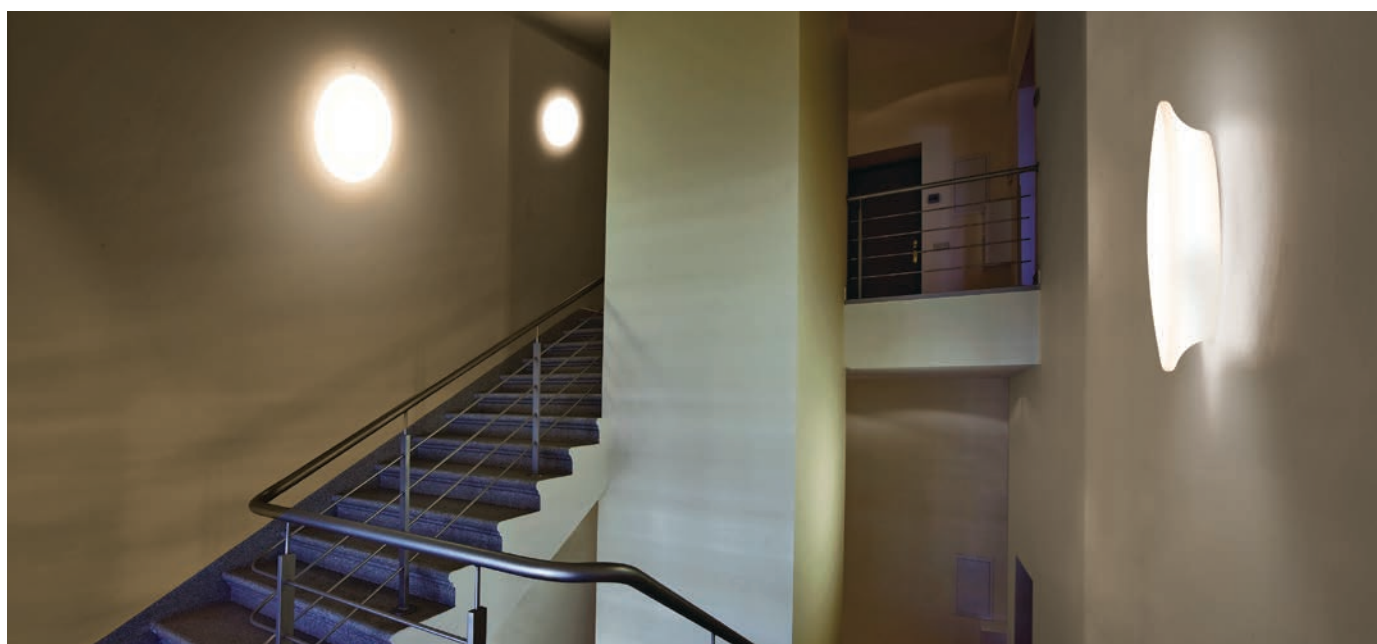
EM autonomy
3 h.EM brightness
14%

MiniWhite_Q | ceiling-wall | TopLED | 4 W 220-240 V





type		colour		optics
White	CRI85	8029	3000 K 400 lm	Diffused
White	CRI85	8029N	4000 K 400 lm	Diffused

MyWhite_Q | ceiling-wall | TopLED | 10 W 220-240 V




type		colour		optics
White	CRI85	7807	3000 K 1122 lm	Diffused
White	CRI85	7807N	4000 K 1122 lm	Diffused

MyWhite_Q | ceiling-wall | TopLED | 16 W 220-240 V




type		colour		optics
White	CRI85	7808	3000 K 1598 lm	Diffused
White	CRI85	7808N	4000 K 1598 lm	Diffused

MyWhite_Q | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7808S****colour**

3000 K 1598 lm

optics

Diffused

motion
sensortime
3 min.sensitivity range
Ø 5 m. H 2,7 m.**MyWhite_Q** | ceiling-wall | TopLED | **16 W** 220-240 V**type**White CRI85 **7808E****colour**

3000 K 1598 lm

optics



Diffused



emergency


EM autonomy
3 h.EM brightness
14%

MyWhite_B | ceiling-wall | TopLED | 11 W 220-240 V




type	colour	optics
White CRI85 7809	3000 K 1065 lm	Diffused
White CRI85 7809N	4000 K 1065 lm	Diffused

MyWhite_B | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7810	3000 K 1731 lm	Diffused
White CRI85 7810N	4000 K 1731 lm	Diffused

MyWhite_B | ceiling-wall | TopLED | 17 W 220-240 V



type	colour	optics
White CRI85 7810S	3000 K 1731 lm	Diffused



motion sensor




time 3 min.



sensitivity range Ø 5 m. H 2,7 m.

MyWhite_B | ceiling-wall | TopLED | 17 W 220-240 V



type

White CRI85 **7810E**

colour

3000 K 1731 lm

optics

Diffused



emergency

EM autonomy
3 h.EM brightness
7%

Linea Light S.r.l. Italy
via della Fornace, 59 z.i.
31023 Castelfranco di Resana (TV) - Italy
Phone: +39 0423 78 68
Fax: +39 0423 78 69 00
info@linealight.com

LightVillage Milano - Exhibition Area Only
via Morimondo, 26 int. 17G
20143 Milano
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@lightvillage.it

Linea Light France
Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light UK Ltd
Suite 109 - Business Design Centre
52 Upper Street - Islington N10QH - London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light Deutschland GmbH
Aktienstraße 214
45473 Mülheim a.d. Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light GCC - Middle East & Gulf Countries
Jumeirah Lake Towers
JBC2 - 35th Floor Office 02 - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Polska Sp. z o.o.
ul. Wiosenna, 47
41253 Czeladź - Poland
Phone: +48 32 265 11 21
Fax: +48 32 265 04 42
biuro@linealight.com.pl

Linea Light Russia
Luzhnetskaya nab., 2/4, str. 3, of. 304
119270 Moscow - Russian Federation
Phone: +7 495 639 99 41
info@linealight.ru

Linea Light USA | Inter Lux
3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Asia-Pacific Ltd
YuXiang Industrial Area
528478 HengLan Town, ZhongShan City,
GuangDong Province, China
Phone: +86 760 87618355
Fax: +86 760 87553990
info@linealight.cn



linealight.com





Your Light | Future Proof