
# PEERLESS

# P115LF-▲

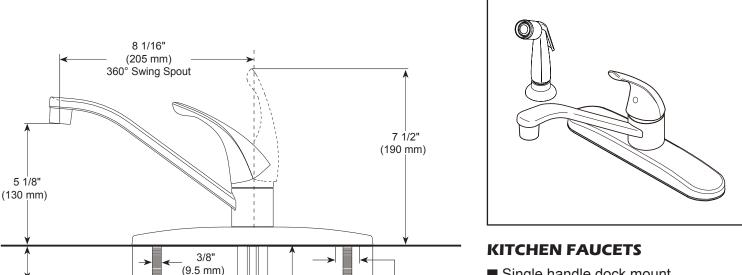

6 5/8"

(167 mm)

3 X1 5/16"~1 1/2"

(33~38mm)

Hole Size

- Single handle dock mount
- 4 hole sink applications

#### **STANDARD SPECIFICATIONS:**

- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- 8" (203 mm) centerset
- Spout rotates 360°
- · Replaceable rotaing ball valve with replaceable nonmetallic seats
- 1/2"-14 NPSM threaded male inlet adapters


## **WARRANTY**

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.peerlessfaucet.com for the complete details of our limited warranty.

### **COMPLIES WITH:**

• ASME A112.18.1 / CSA B125.1

LCC/ANSI A117.1 - Valve control only

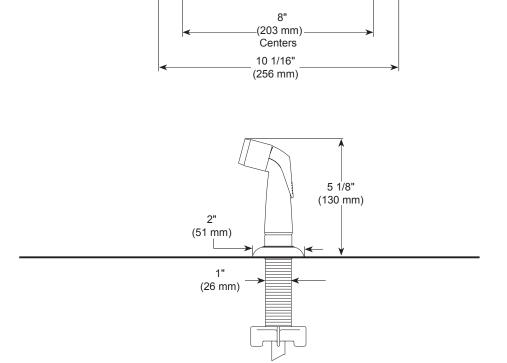

1/2"-14 NPSM

1 1/4"

(32 mm)

Max. Deck

Thickness