


# PRODUCT SUBMITTAL 1302

**Product:** EVERLOC+™ Closed-End Stub Out Ells  
**Date:** 17 January 2019 (supersedes 16 August 2018)

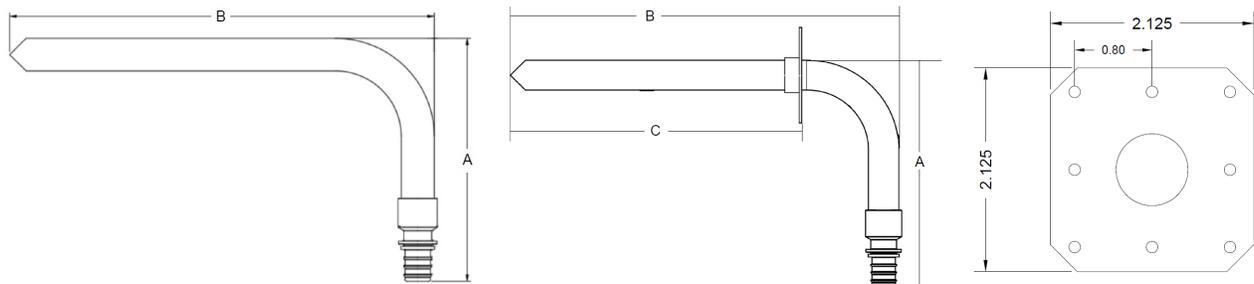

Article No.	Nominal Size in	A in (mm)	B in (mm)	C in (mm)
418665-001	1/2 x 1/2 Copper Tube	4.70 (119.4)	8.00 (203.2)	n/a
418668-001	3/4 x 3/4 Copper Tube	5.60 (142.2)	8.00 (203.2)	n/a
424864-001	1/2 x 1/2 Copper Tube with Mounting Plate	4.73 (120.1)	8.00 (203.2)	6.00 (152.4)
329229-001	3/4 x 3/4 Copper Tube with Mounting Plate	5.56 (141.2)	8.00 (203.2)	5.50 (139.7)

### TECHNICAL DESCRIPTION

Specification	ASTM F877 / CSA B137.5 / ASTM B88
Material	ECO BRASS® (C69300 or CW724R) / Copper Alloy C12200 Type L
Certifications	cNSFus-pw

### FUNCTIONAL DESCRIPTION

EVERLOC+ closed-end stub out ells are designed for use with REHAU PEXa pipe and the EVERLOC+ compression-sleeve fitting system to create a reliable connection that can be walled in. The maximum temperature and pressure ratings of the EVERLOC+ compression-sleeve fitting system is in accordance with ASTM F877 and CSA B137.5 for SDR9 PEX, see REHAU pipe product submittals for ratings. Installation is performed with EVERLOC+ compression-sleeve tools. Follow all published *REHAU Technical Guidelines*. All EVERLOC+ fittings and sleeves comply with the lead-free (LF) requirements of the U.S. Safe Drinking Water Act.

Note: The 2 1/8" x 2 1/8" mounting plate on Art. 424864-001 and 329229-001 can be used to secure stub out ell to building framework.

For updates to this publication, visit [na.rehau.com/resourcecenter](http://na.rehau.com/resourcecenter)

The information contained herein is believed to be reliable, but no representations, guarantees or warranties of any kind are made as to its accuracy, suitability for particular applications or the results to be obtained therefrom. Before using, the user will determine suitability of the information for user's intended use and shall assume all risk and liability in connection therewith.

© 2019 REHAU