

Sterling Sand is a manufacturer and distributor of industrial, commercial, and construction sand, repair mixes, and abrasive media.

Our goal is to provide the highest quality products and service in our industry because we value our relationships with our customers. If you do not see what you need, please call. We aim to please.

Whether you need a filler extender for asphalt, sports turf, divot repair for tee-boxes and fairways, industrial sand for flooring or precast, or a top dressing mix for putting greens and flowerbeds, Sterling Sand is committed to providing better products—clean, and consistently.


We offer excellent service, knowledgeable employees to answer your questions, and great packaging. Expect next day delivery or same day pick-up. We always put you first. You can count on our dependability, our drive and our integrity.

One of the major aspects of Sterling Sand's bagging business is private labeling and contract packaging various industrial and retail trades. Sterling Sand also has the ability to mix various amendments with sand and then package.

Bagging services include:

- Ability to handle long and short-term projects
- Packaging in either paper or plastic
- Private labeling services
- Bag capabilities from 50lb to 3000lb bulk bags
- Coordination of bulk material deliveries
- Truck loading & unloading
- Bulk material storage
- Warehousing of bagged materials
- Palletizing, stretch wrap and pallet covers
- Order fulfillment and delivery capabilities

We can deliver completed contract orders or coordinate with common carriers for the shipment of packaged materials.

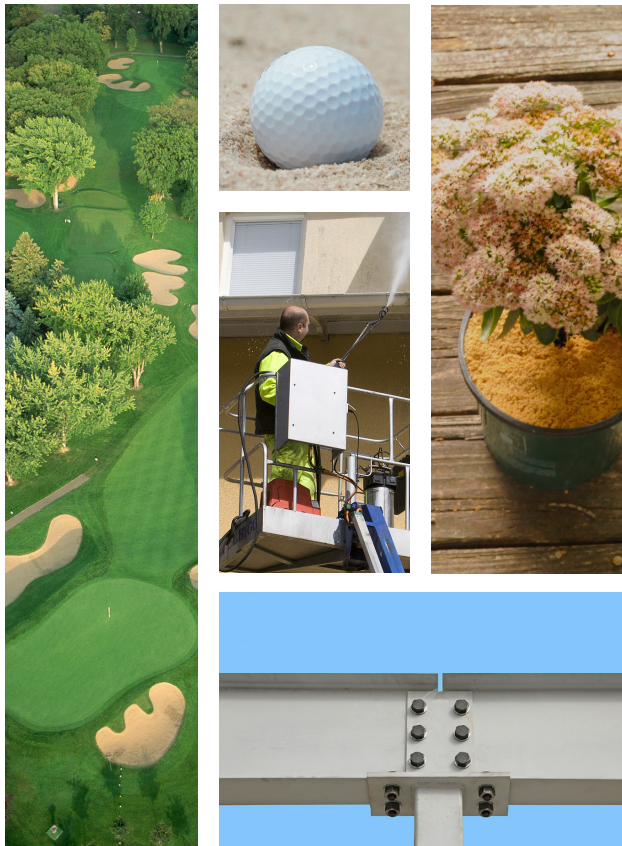

Production facilities are located in Columbia, West Columbia, Lugoff, and Sumter, South Carolina; Aberdeen, North Carolina; and Louisville, Kentucky.



Sales & Customer Service Office
2800 William H. Tuller Drive
Columbia, SC 29205
Ph: 866-515-0965
Fax: 803-343-1001

www.sterlingsand.com
www.sterlingcreativesand.com
www.sterlingtransport.com


Distributed by:
© Copyright 2010 Sterling Sand





New Age Blast Media® is an alternative 100% recycled glass blasting media that directly benefits the environments while eliminating health risk of airborne carcinogens. Manufactured from 100% Recycled Bottle Glass. Bottle or Tri-Mix Glass is chemically known as “Amorphous Silica”. It contains virtually no free-silica which is commonly found in blasting sand.

The manufacturing process cleans and grinds the recycled glass into a usable industrial grade, expendable abrasive that can replace more hazardous slag/mineral abrasives. The product is sized and screened into multiple specifications needed for various Abrasive Blasting needs. Can be used for dry or wet blasting applications.



Sterling Industrial Abrasive Sand comes from 98% pure quartz-based silica sand used in sand-paper, glass grinding, metal polishing and casting cleaning, also in powder coating and seal coating applications to remove paint, stain, and rust. After being washed and dried, the sand is screened to meet five specific gradations: #12 coarse, #25 medium, #45 fine, #55 extra-fine, and #80 ultra-fine. Sands with angular-shaped grains are often used because they cut faster. Sands with rounded grains yield a smoother finish and last longer.



Sterling Filter Sand is a single grade sand media used to remove particulates, typically suspended solids larger than 50 microns. Sand filters come in two varieties: • Gravity filters – used often in municipal applications on surface water supplies

- Pressure filters – used mostly in industrial water reclaim applications, swimming pool filters, cooling tower side stream filtration, but can be used in many other applications



Sterling Coal Slag is a stable amorphous mixture of iron and aluminum silicates, produced by a coal fired power-generating station. The slag abrasive is washed, graded and dried. The final process of screening produces the two sizes currently available: 11/40 Medium and 20/50 Fine. Sterling Coal Slag's angularity and hardness make it an ideal abrasive for difficult mill scale and rust. Its most common use is for ship repair, but it is excellent for any projects requiring white metal cleaning or large mil profiles. It is also commonly used in projects that require a non-silica abrasive.




Flooring—Sterling Flooring Sand is used to level uneven surfaces to prepare for leveling concrete.



Sterling Creative Play Sand has been fascinating and mesmerizing children for decades. Sterling Creative Play sand is clean, pure, and safe for indoor sand tables or large outdoor sand-boxes. Children will spend hours digging and sifting through the sand and even adults will engage in some childhood play. Keep damp.



Sterling Divot Repair Mix is great for filling divots or repairs in high profile areas. It is a unique blend of TD-320 Top Dressing Sand. Sterling Divot Repair Mix is manufactured following U.S.G.A. guidelines. The silica sand is washed, dried, sized, and then colored green and bagged. Sterling Divot Repair Mix was specifically designed for repairing divot marks on tee-boxes and fairways. But it can also be used as a top dressing mix for putting greens and soil conditioners for tree, shrubs, and flowerbeds.



Sterling Traction Sand is produced from 98% pure silica sand, angular in shape. It is a washed, sized, dried and screened material used for gaining traction on slippery or smooth surfaces.




Sterling Topdressing Sand is surfaced mined, produced from 98% pure silica sand, which is angular in shape. Sterling Topdressing Sand is available in #35, #45 and #55 Sieve Analysis.


We also have a #65 Ultra Fine for the new ultra dwarf Bermuda grasses. It is typically a light buff color, almost off-white.







Sterling Bunker Sand is clean washed sand containing 3% or less total silt plus clay. Greater amounts of silt and clay in bunker sands make them susceptible to ‘crusting’ and ‘set-up’ that increases maintenance to keep the bunkers in playable condition. High amounts of silt and clay also tend to make drainage slow and cause ‘ponding’ in the bunkers.



Sterling Washed Mortar Sand is surfaced mined, produced from 98% pure silica sand, which is angular in shape. During the mining and screening process, particles larger than the #4 screen are removed, screened and washed to remove silt and clay, then allowed to drain. It is typically a light buff color, almost off-white.



Winner Play Turf Paint is green lawn paint that will make your grass look green and lush in minutes! Mix it with water and paint your lawn with any garden pump sprayer.

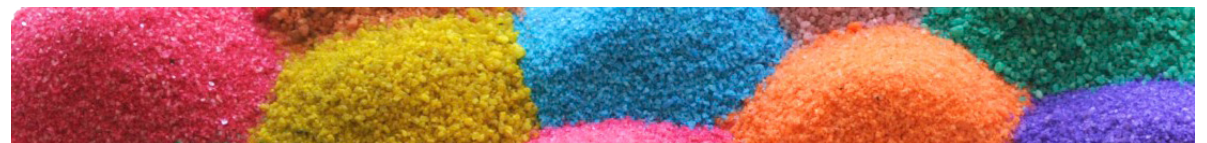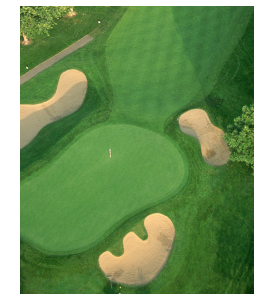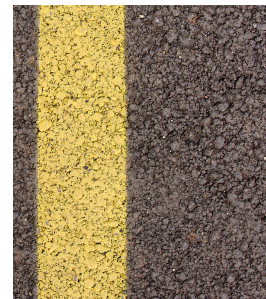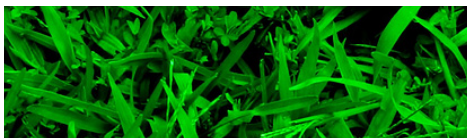

Hard to find products:

Aluminum Oxide

Garnet

Starblast™

Starblast™ XL Blasting Abrasives

Nickel Slag

Quartz Gravel

Copper Slag