


001 Flee



002 Sardine

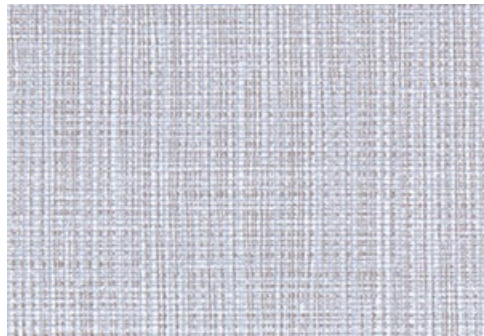


003 Allure



004 Marcassite



005 Herald

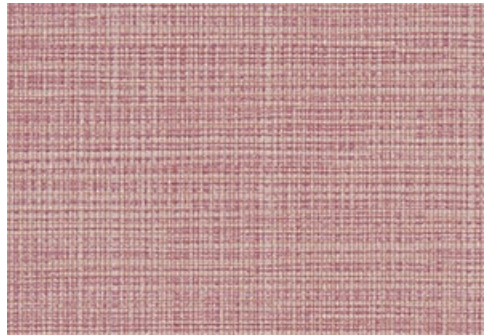

006 Rosy




007 Figure



008 Cake



009 Limestone

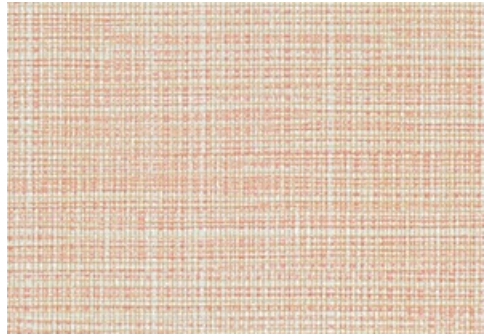


010 Stamen




011 Millet




012 Nacre

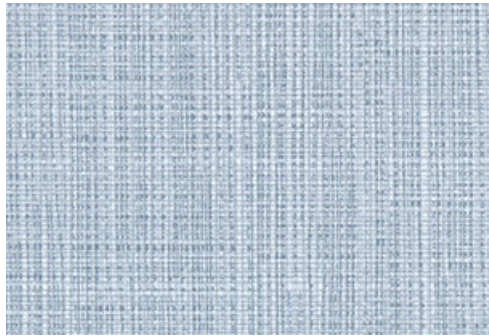

013 View

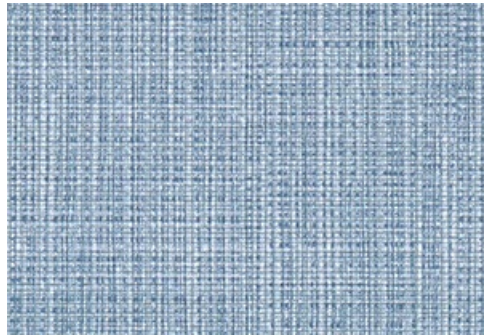

014 Underwater

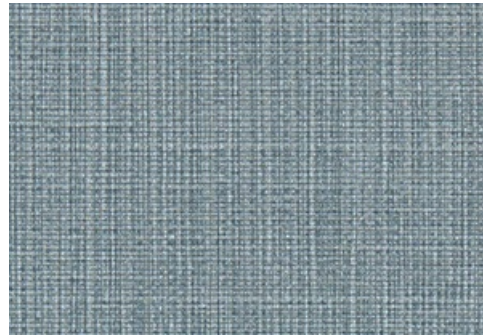

015 Astral



Application

Walls

Characteristics

Content: 100% Non-Phthalate Vinyl  
Finish: None (Impermeable)  
Backing: Polyester/Cotton Osnaburg  
Width: 54" (137cm)  
Bolt Size: 30 yards (27 m)  
Class: Type II  
Weight: 20 oz/ly (600 gr/lm)  
Traffic: High Traffic  
Country of Origin: USA  
Note on Mold: Intended for use in buildings designed and maintained to avoid moisture on or within walls.  
Application must conform to current Installation Guidelines included in each shipment or available at maharam.com.

Price

\$23.50 / C\$35.50 (FOB destination)  
C\$32.00 (FOB origin)

Testing

Flammability: AS/NZS 3837 Adhered  
ASTM E 84 Adhered  
BS 476 Adhered\*  
CAN ULC S102 Adhered  
EN 13501 Adhered\*  
GB 8624 Adhered\*  
\*passes with additional treatment

Lightfastness: AATCC 16.3, 200+ hours



Maintenance

W/B-Clean with water-based cleanser or diluted household bleach.



Environmental

Greenguard Certified  
FR Free  
Free of Intentionally Added PFAS  
Non-Phthalate Vinyl

Warranty

10 years. See Terms and Conditions for more information.

© 2018 Maharam

Last updated April 1, 2024