

TOUGHER > FASTER > SIMPLER



EX 180

NOMINAL TORQUE
212,000 ft-lb, 287 kNm

ACTUAL TORQUE
176,000 ft-lb, 238 kNm

SPIN OFF 85 rpm
LINE PULL 40,000 lb, 178 kN
WEIGHT 113,000 lb, 51 mt
MAX DEPTH 95 ft, 28 m

WATSONUSA.COM
800-927-8486



100% WATSON OWNED



DRILL MORE HOLES



EXCADRILL - EX180



4015 South Freeway
Fort Worth, Texas 76110
800-927-8486
Fax 817-927-8716
sales@watsonusa.com

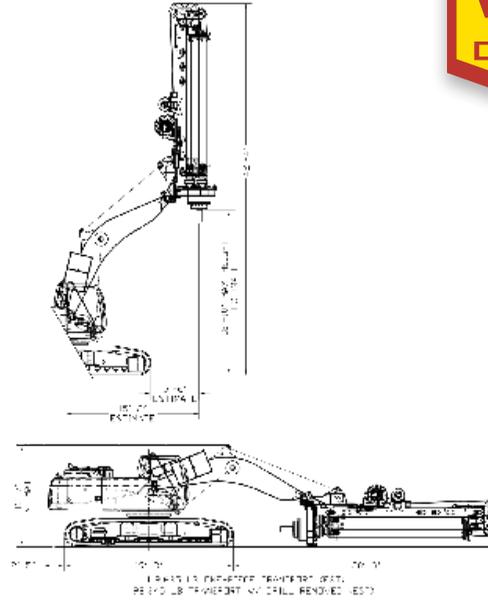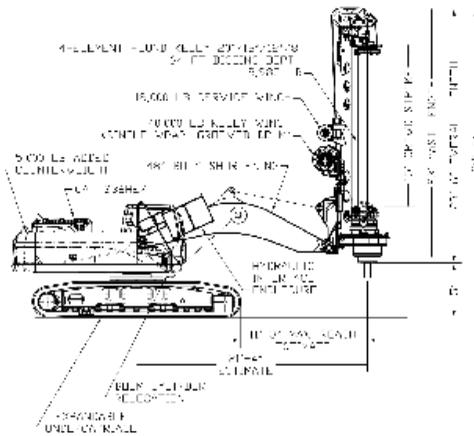

EX-180 Mast Height	16.5 ft	18 ft	21 ft	23 ft	25 ft
Kelly Bars / Max Depth 2-5 Square	53 ft	60 ft	75 ft	85 ft	95 ft
Kelly Bars / Max Depth 2-4 Round	38 ft	44 ft	56 ft	64 ft	72 ft

FASTER MOVES – LARGER HOLES

PERFORMANCE

NOMINAL TORQUE*	212,000 ft-lb	287 kNm
ACTUAL TORQUE*	176,000 ft-lb	238 kNm
SPIN OFF	85 rpm	
KELLY WINCH W/FREEFALL	40,000 lb	178 kN
SERVICE WINCH	18,000 lb	80 kN
CROWD FORCE	35,000 lb	156 kN
SIDE TILT	7° left/right	

CONFIGURATION *(as illustrated above)*

BASE MACHINE		35 - 50 mt
OPERATING WEIGHT**	113,000 lb	51 mt
DRILLING DEPTH**	85 ft	25.9 m
CROWD STROKE	15 ft	4.57 m
KELLY SET 5-BAR SQUARE		

STANDARD OPTIONS

Multiple masts and bar sets available to meet specific drill depth needs, overhead height requirements and transport weight to meet haul trailer and DOT standards
Quick Disconnect Boom/Counterweight
Custom Kelly Stubs, Service Winches and Paint Schemes
Reaction Jack for increased performance on hard rock

DEFINING FEATURES

- Hydraulic Rotary** achieves max torque and max spin off without clutches or gear shifting
- Full Excavator Horsepower** delivered to the tool
- Interchangeable Heavy Duty Kellys**, swap square & round kellys to match drilling conditions
- Large Diameter 24" Rotary** utilizes **Bigger Bars** which means less wear
- Full Top Crowd** straighter holes, simplified bar locking
- Single Layer, Grooved Kelly Winch** drum for max line pull and longer rope life
- Controlled Freefall**, two-speed Kelly winch for faster cycle times
- Optimized Hydraulic Interface** allows for simpler operation and maintenance

* Nominal Torque (aka Rated Torque) is published by all manufacturers but is actually a theoretical calculation that ignores the 15% - 20% efficiency loss present in all rigs.

** Actual Torque is the usable torque at the tool determined through testing of every Watson rig. This value is not typically shared by manufacturers.

** Drill depths and weight dimensions are dependent on mast height and kelly bar configurations.