

NEMA 4X 30A and 60A motor control disconnects

**Catalog symbols:**

- AHDS30_-BUSS
- AHDS60_-BUSS

Description:

The Bussmann® series non-fused 30 and 60 amp disconnect switches are suitable for use as a motor disconnect per NEC® 430.102(B) and 430.109(A)(6). These NEMA 4X switches are made from VALOX™ resin, and are a flexible and economical solution to 3-phase power switching applications. Ideal for washdowns and corrosive environments, they feature a lockout/tagout capability to meet OSHA requirements. Suitable for use with metallic conduit, they are available with auxiliary contacts for a variety of control circuit applications.

Specifications:**Ratings**

- Volts
 - 600Vac max
- Amps
 - 30A and 60A
- Short-Circuit Current Rating (SCCR)*:
 - 10kA RMS symmetrical with Class RK1 fuse
 - 65kA RMS symmetrical with Class J fuse**

Agency information

- cULus to UL® 60947-1 and 60947-14, File E135083
- National Sanitation Foundation (NSF®) Listed per NSF 3-A 14159-1 standard
- NOM 426
- RoHS compliant

Features:

- VALOX thermoplastic enclosure provides high impact strength and excellent corrosion resistance
- Adjustable mounting feet for flexible positioning options: flush mount or 1/4" offset (for easy washdown behind the enclosure)
- High-visibility red handle can be padlocked to meet OSHA lockout/ tagout requirements
- One piece gasket provides superior watertight protection and easy cleaning
- Integrated grounding plate and DIN-Rail switch mounting allows automatic grounding for easier installation
- Optional auxiliary contacts provide flexibility for PLC and VFD applications
- Heavy-duty industrial switches designed for long life

* Break all lines.

** Not applicable for 1Ø 120 and 277Vac applications.



Powering Business Worldwide

Enclosure

- NEMA 4X (provides 4, 12 and IP67 protection)

Flammability rating

- UL 94 5VA2

Temperature rating*

- Max continuous +60°C (+140°F)
- Min continuous (without impact) -50°C (-58°F)

Horsepower rated

- See catalog numbers table

Poles

- 3-poles

Conductors

- #10 to #14 AWG, solid or stranded 75°C Cu

UV resistance

- Enclosure materials are UV stabilized

Dielectric voltage

- 2.2kV AC minimum

Mechanical


- Impact resistance per UL 746C
- Mechanical life
 - 10,000 cycles minimum
- Terminal identification per UL and CSA®
- Product identification and ratings are part of internal and external label
- Mounting
 - External adjustable feet with 0, 45 and 90 degree positions

Materials

- Enclosure
 - Top cover, base and mounting feet: VALOX resin
 - Cover screws: captive phil-slot 300 series stainless steel mating with threaded brass inserts
 - Mounting feet screws: 300 series stainless steel
- Handle
 - Handle and handle shaft: VALOX resin
 - Handle seal: neoprene
 - Handle screw: tamper resistant 300 series stainless steel
- Grounding
 - Grounding plate: galvanized steel
 - Assembly screws: 300 series stainless steel

* When used with 75°C Cu wire only.

Catalog number system



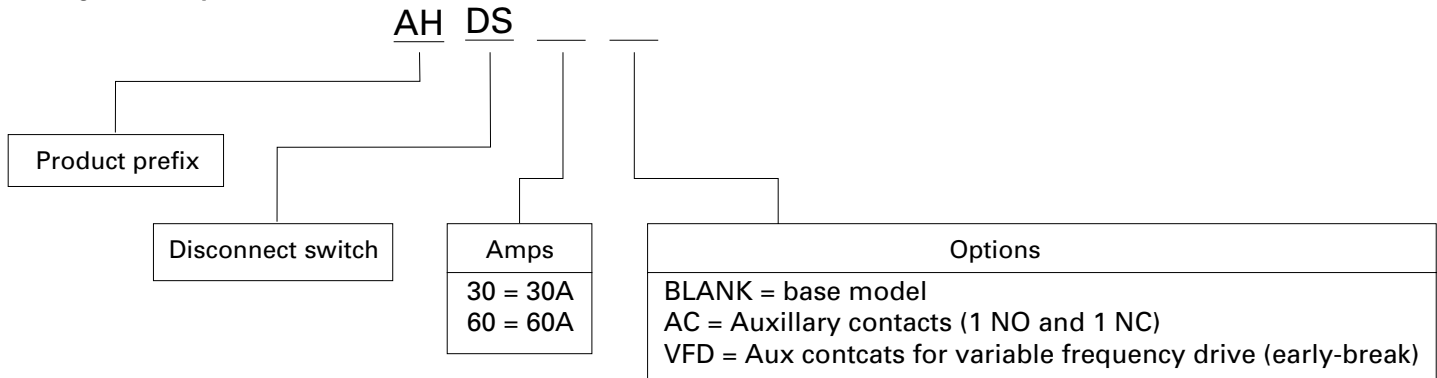


Catalog numbers:




Catalog number	Description	Horsepower ratings (phase/Vac)						
		1Ø, 120V	1Ø, 220-240V	1Ø, 277V	1Ø, 440-480V	3Ø, 224-240V	3Ø, 440-480V	3Ø, 600V
AHDS30-BUSS	30A disconnect switch							
AHDS30AC-BUSS	30A disconnect switch with auxiliary contacts	1	3	3	5	5	10	10
AHDS30VFD-BUSS	30A disconnect switch with auxiliary contacts for variable frequency drive							
AHDS60-BUSS	60A disconnect switch							
AHDS60AC-BUSS	60A disconnect switch with auxiliary contacts	2	5	7.5	10	10	20	20
AHDS60VFD-BUSS	60A disconnect switch with auxiliary contacts for variable frequency drive							

Dimensions - in (mm):

30A disconnect

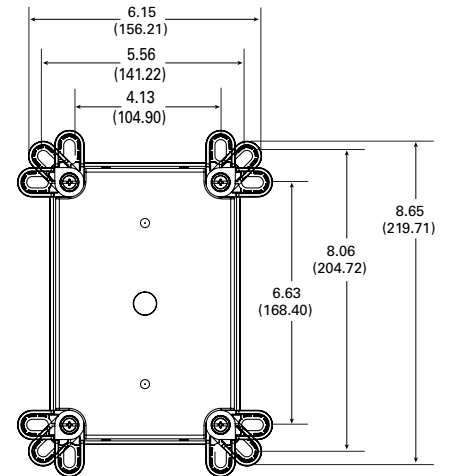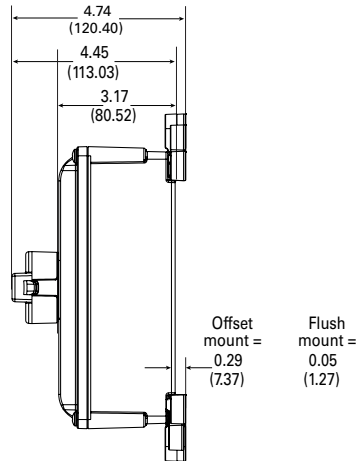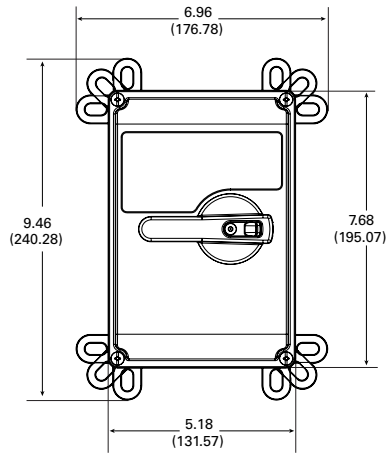



60A disconnect

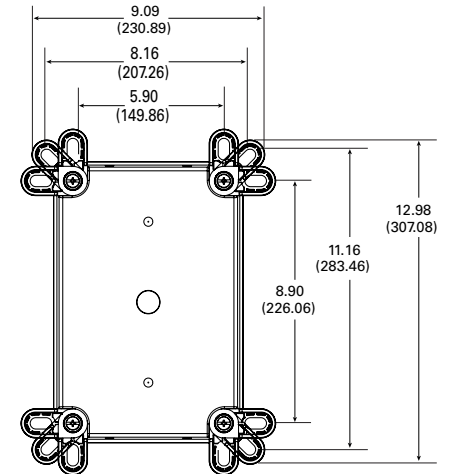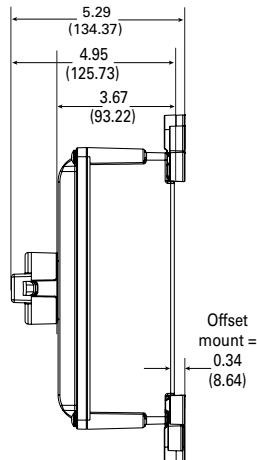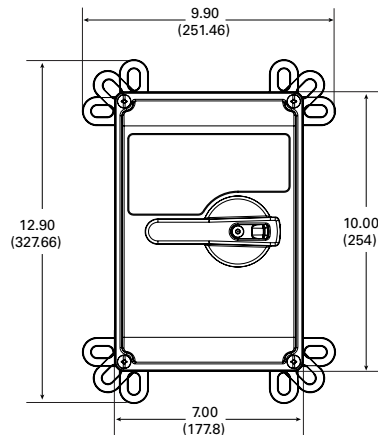

Auxiliary contact timing:

Standard

Variable frequency drive

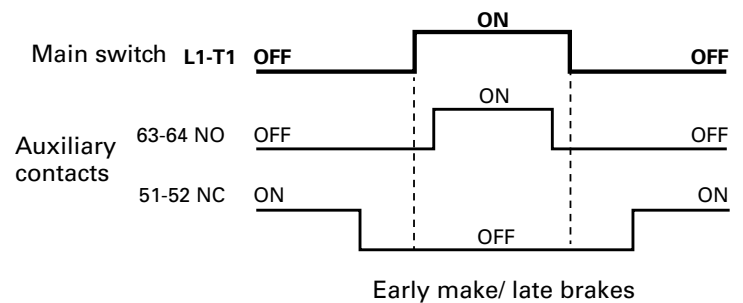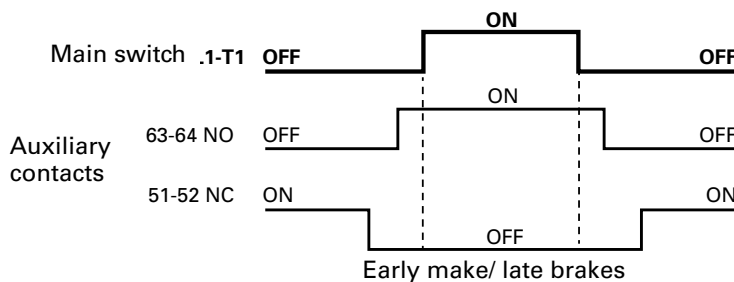

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
Eaton.com

Bussmann Division
114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 10416 — BU-SB15290
December 2015

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.
NEC is a registered trademark of the National Fire Protection Association, Inc.
NEMA is a registered trademark of the National Electrical Manufacturers Association.
NSF is a registered trademark of NSF International.
UL is a registered trademark of the Underwriters Laboratories, Inc.
VALOX is a registered trademark of SABIC, or its affiliates or subsidiaries.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

Follow us on social media to get the latest product and support information.

