


Options for PICO Probe Connectivity


Option1: RS485 interface, (analogue outputs)



alternative to the HD2:
PICO-BT Bluetooth and PDA

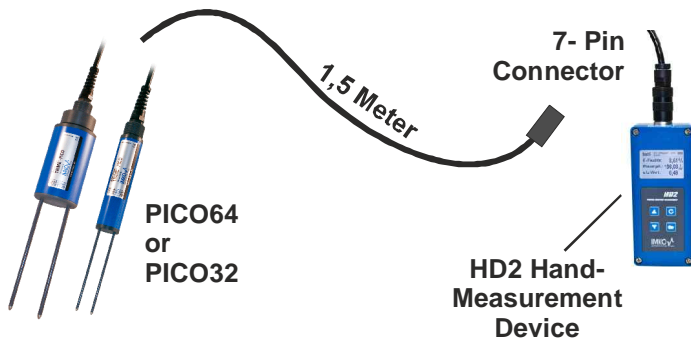


Option2: IMP-Bus

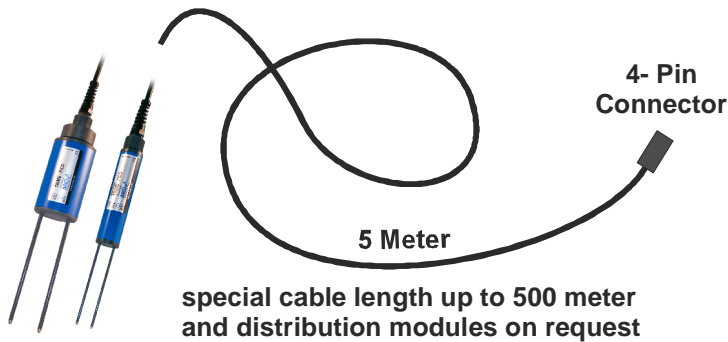

IMKO's GlobeLog Datalogger




Option3: Analogue outputs, RS485 and IMP-Bus

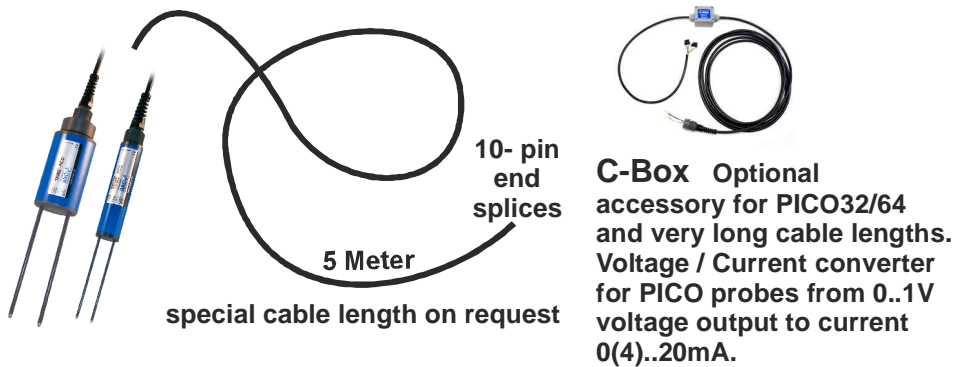

External
Datalogger
with serial
interface
RS485 or
analogue
inputs

Option4: Analogue outputs, SDI12 and IMP-Bus

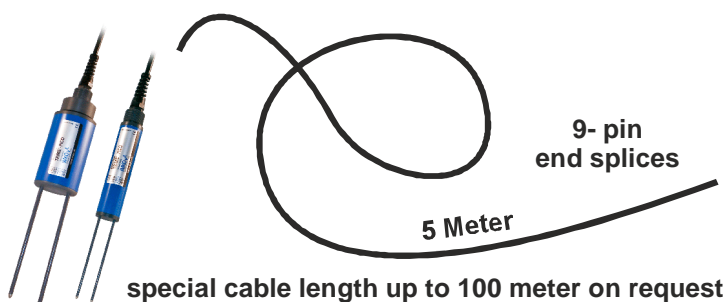

or

SDI12
Data-
logger

SM-USB



Connection to the
USB-Port. The SM-
USB works with
costfree data-
logger software
TRIME WinMonitor
under Windows.