




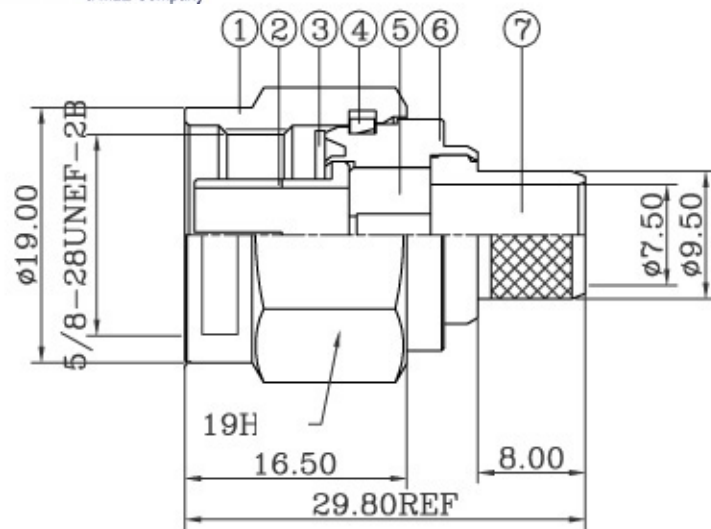


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 70 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 1.5 MIN. THICK OVER NICKEL PL. 70 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. JIS H 3250, C 2700

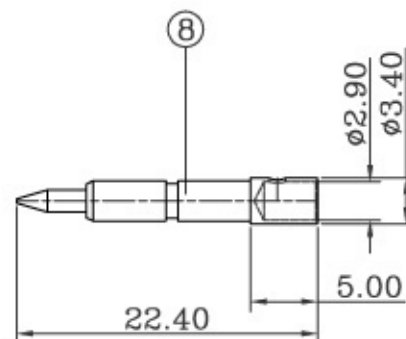

1. CRIMPED FERRULE  
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .100"  
OR TO SOLDER

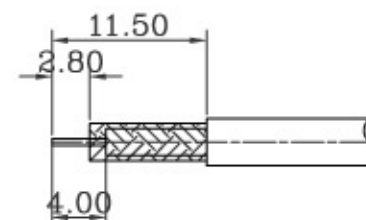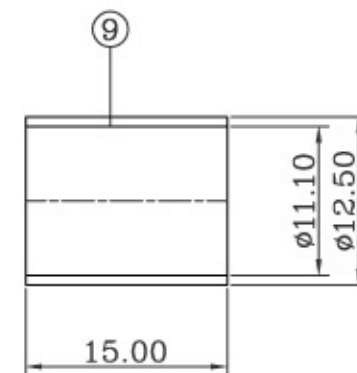

RECOMMENDED  
CABLE STRIPPING DIM'S

|      |               |          |      |          |
|------|---------------|----------|------|----------|
| 9    | FERRULE       | NOTE 5   | 1    | NOTE 2   |
| 8    | CONTACT PIN   | NOTE 1   | 1    | NOTE 3   |
| 7    | REAR BODY     | NOTE 1   | 1    | NOTE 2   |
| 6    | BODY          | NOTE 1   | 1    | NOTE 2   |
| 5    | INSULATOR     | NOTE 4   | 1    | NATURAL  |
| 4    | RETAINER RING | NOTE 1   | 1    | NATURAL  |
| 3    | GASKET        | RUBBER   | 1    | RED      |
| 2    | OUT CONTACT   | NOTE 1   | 1    | NOTE 2   |
| 1    | SHELL         | NOTE 1   | 1    | NOTE 2   |
| ITEM | DESCRIPTION   | MATERIAL | Q'TY | FINISHED |

**Alternative Component Source**  
www.alternativecomponentsource.com

|             |                             |         |     |
|-------------|-----------------------------|---------|-----|
|             | 成品图                         | UNITS   | MM  |
| DRAWING NO. |                             | SCALE   | FIT |
| MODEL NO.   | SN305/LMR400/HEX            |         |     |
| PART NO.    |                             | EDITION | A1  |
| CAD FILE    | Yin sheng/Yifaxing/SN/SN305 |         |     |

|                                                                   |  |           |  |
|-------------------------------------------------------------------|--|-----------|--|
| TITLE                                                             |  | DESIGNED  |  |
| N PLUG CRIMP 50 OHM<br>FOR RG8U, BELDEN9913, LMR400 CABLE         |  | NQ        |  |
| UNLESS OTHERWISE SPECIFIED<br>TOLERANCES:                         |  | DRAWING   |  |
| 0.5-15 = ±0.15<br>15-30 = ±0.30<br>30-120 = ±0.60<br>>120 = ±1.00 |  | NQ        |  |
| ANGLES<br>±5°                                                     |  | CHECKED   |  |
| PUBLISH DATE                                                      |  | David     |  |
| 2011/06/08                                                        |  | APPROVED  |  |
|                                                                   |  | Andy      |  |
|                                                                   |  | 3RD ANGLE |  |