

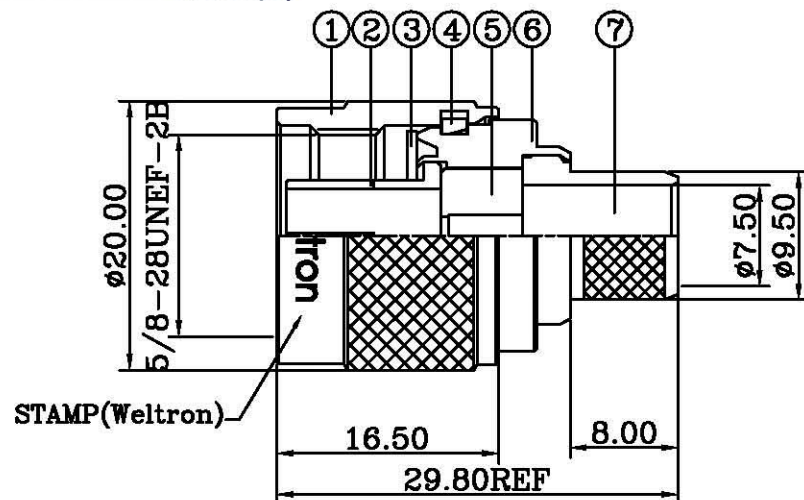


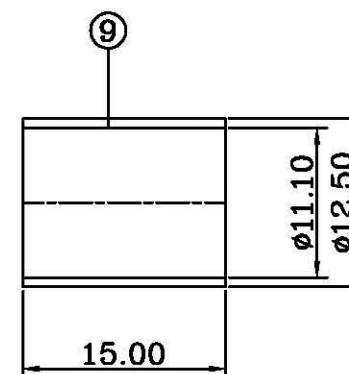


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. SILVER PL.100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL.3 MIN. THICK OVER NICKEL PL.100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. JIS H 3250, C 2700

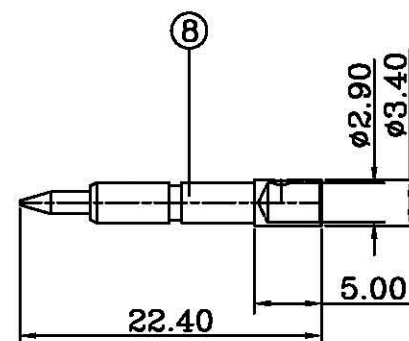

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
OR TO SOLDER

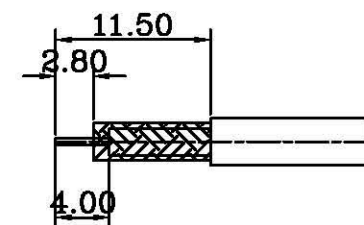

**RECOMMENDED
CABLE STRIPPING DIM'S**

44-262-8
44-262-LMR400

9	FERRULE	NOTE 5	1	NOTE 2
8	CONTACT PIN	NOTE 1	1	NOTE 3
7	REAR BODY	NOTE 1	1	NOTE 2
6	BODY	NOTE 1	1	NOTE 2
5	INSULATOR	NOTE 4	1	NATURAL
4	RETAINER RING	NOTE 1	1	NATURAL
3	GASKET	RUBBER	1	RED
2	OUT CONTACT	NOTE 1	1	NOTE 2
1	SHELL	NOTE 1	1	NOTE 2
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

Alternative Component Source www.alternativecomponentsource.com				TITLE N PLUG CRIMP 50 OHM FOR RG8U, RG11U, RG213U, RG214U, Beden9258, BELDEN9913, LMR400 CABLE			
	成品图	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 ANGLES 15-30 = ±0.30 ±5° 30-120 = ±0.60 >120 = ±1.00		DESIGNED	NQ
DRAWING NO.		SCALE	FIT			DRAWING	NQ
MODEL NO.	SN306-W-BAGTB3G-400-50					CHECKED	David
PART NO.		EDITION	A1	PUBLISH DATE		APPROVED	Andy
CAD FILE	Yin sheng/Yifaxing/SN/SN306			2010/01/03		第三角	