
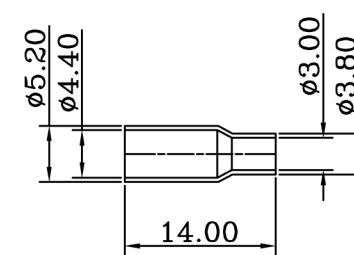





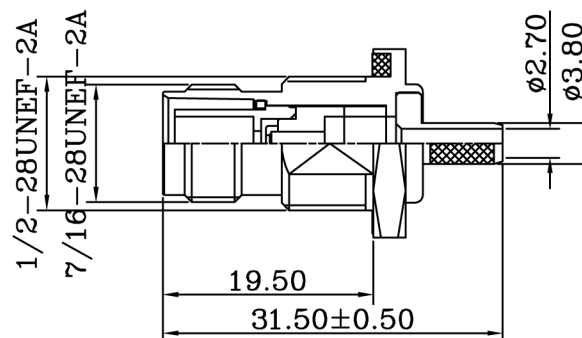



REVISIONS

RevNo	Description	Date	REVISION	Mender
1				
2				



13	NUT	ZINC	1	NICKEL PLATED
12	LOCK WASHER	IRON	1	NICKEL PLATED
11	FERRULE	BRASS	1	NICKEL PLATED
10	SLEEVE	POM	1	NATURAL
9	SLEEVE	POM	1	NATURAL
8	CONTACT PIN	BRASS	1	GOLD PLATED
7	GASKET	RUBBER	1	RED
6	BARREL	BRASS	1	NICKEL PLATED
5	WASHER	BRASS	1	NICKEL PLATED
4	INSULATOR	POM	1	NATURAL
3	INSULATOR	POM	1	NATURAL
2	INSULATOR	POM	1	NATURAL
1	BODY	ZINC	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

- 1.CRIMPED FERRULE HEX
CRIMP SIZE .178"
- 2.CRIMPED CONTACT PIN HEX
CRIMP SIZE .068"



RECOMMENDED
CABLE STRIPPING DIM'S

Alternative Component Source				TITLE		
www.alternativecomponentsource.com				RP-TNC STRAIGHT JACK CRIMP TYPE FOR RG174U		
PART NO.	成品图	UNITS	MM	UNLESS OTHERWISE SPECIFIED TOLERANCES: 0.5-15 = ±0.15 15-30 = ±0.30 30-120 = ±0.60 >120 = ±1.00	DESIGNED	Xwj
		SCALE	FIT		DRAWING	Xwj
MODEL NO.	ST229/Zn/RG174U			PUBLISH DATE	CHECKED	David
DRAWING NO.			EDITION		APPROVED	Andy
CAD FILE	Yin sheng/Yifaxing/ST/ST229			2007/06/23	3RD ANGLE	