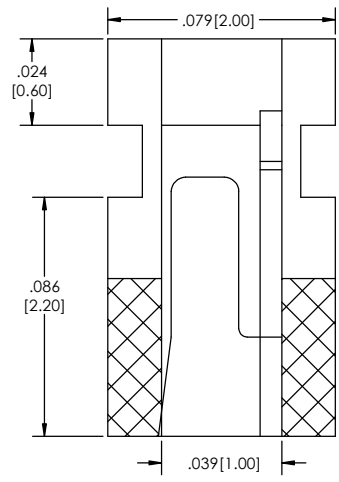
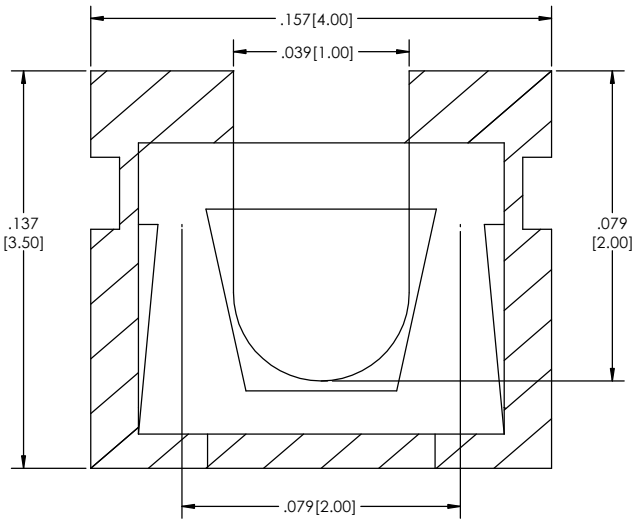


BLSH-2 - **F** - **01** - **LF**
(A) (B) (C)

- A. Plating Options
- See Plating Options below
B. Shunt Style
- 01 Series= Low profile, Low insertion
C. Lead Free

Plating options	
F	Gold Flash over Entire Pin

Specifications:
Current Rating: 3.0 Ampere
Insulation Resistance: 1000M Ohms Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20M Ohms Max.
Operation Temperature: -40°C to +105°C
Max. Process Temperature
Peak: 260°C up to 10 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Manual Solder: 350°C up to 5 secs.

Materials:
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T
White Molded Plastic

Products cut to specific sizes are uncancellable/ nonreturnable.
Parts are subject to change without notice.



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Major League Electronics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Major League Electronics IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:				NAME	DATE			
DIMENSIONS ARE IN INCHES TOLERANCES: ONE DECIMALS ±.100 TWO DECIMAL ±.010 THREE DECIMAL ±.005 FOUR DECIMAL ±.002				DRAWN	EOW			10/26/16
				CHECKED	GWE			10/26/16
				ENG APPR.				
				MFG APPR.				
		INTERPRET GEOMETRIC TOLERANCING PER:		ADDRESS:		TITLE: BLSH-2 SERIES		
MATERIAL		2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com						
FINISH								
NEXT ASSY		USED ON				SIZE	DWG. NO.	REV
						C		A
APPLICATION		DO NOT SCALE DRAWING				SCALE 30:1		SHEET 1 OF 1