

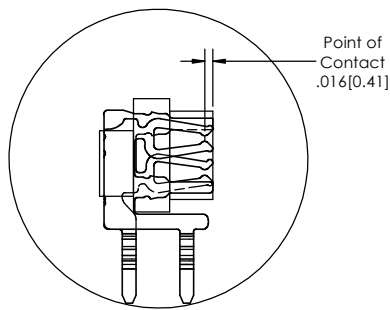
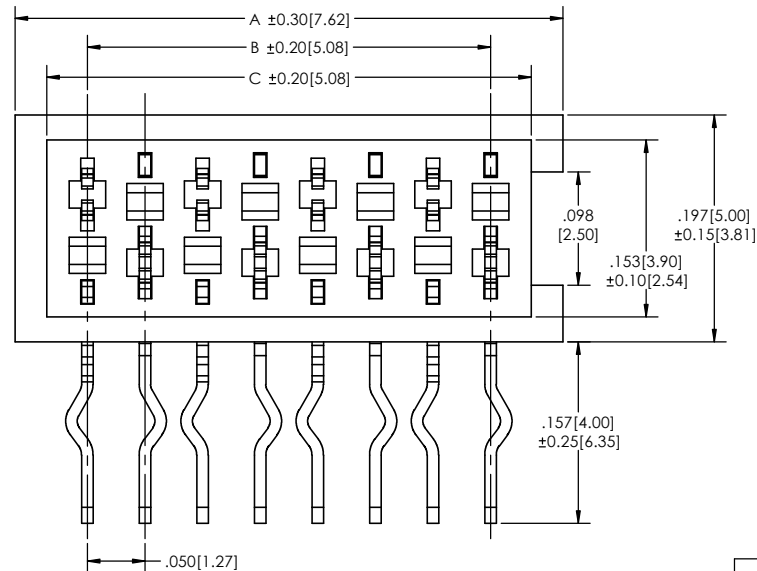
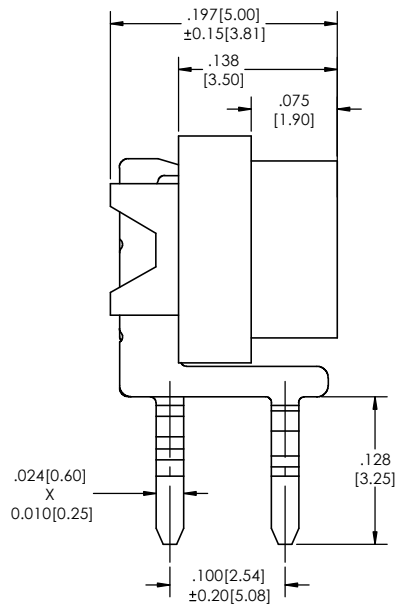


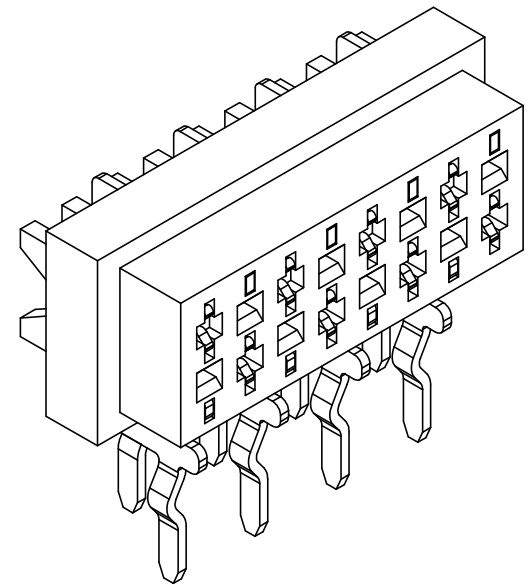

Recommended P.C. Board Layout

Tolerance +/- 0.05

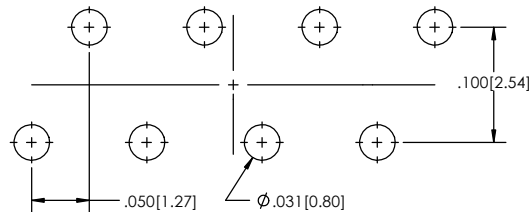

MICRO - 02 - **XX** - **LF**
(A) (B)

- A. Pins Per Row
- 2 through 10
B. Lead Free

Specifications:
Current Rating: 1.0 Ampere
Insulation Resistance: 1000M Ohms Min.
Withstanding Voltage: 500V AC/DC
Contact Resistance: 20M Ohms Max.
Operation Temperature: -40°C to +105°C

Materials:
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic
PA46 (UL94V-0), Red
Contact Plating: Sn Over Ni
Packing: Tube without Pick and Place pad

Termination:
PCB

Mates With:

- MICRO-05 (Wire Board)
MICRO-06 (Board to Board)
MICRO-07 (Board to Board)

Pins Per Row	Dimension			Qt'y/ Tube
	A	B	C	
2	7.00	3.81	5.60	82
3	9.54	6.35	8.14	60
4	12.08	8.89	10.68	48
5	14.62	11.43	13.22	39
6	17.16	13.97	15.76	33
7	19.70	16.51	18.30	29
8	22.24	19.05	20.84	26
9	24.78	21.59	23.38	23
10	27.32	24.13	25.92	21

Tails may be clipped to achieve specific dimensions.
Products cut to specific sizes are uncancellable/ nonreturnable.
Parts are subject to change without notice.



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
Major League Electronics. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
Major League Electronics IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE
DIMENSIONS ARE IN INCHES		DRAWN		EOW 01/22/15
TOLERANCES:		CHECKED		GWE 01/22/15
ONE DECIMALS ±.100		ENG APPR.		
TWO DECIMAL ±.010		MFG APPR.		
THREE DECIMAL ±.005		INTERPRET GEOMETRIC TOLERANCING PER:		
FOUR DECIMAL ±.002		MATERIAL		
NEXT ASSY		FINISH		
USED ON		DO NOT SCALE DRAWING		
APPLICATION		ADDRESS:		2533 Centennial Blvd. Jeffersonville, IN 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@ml-electronics.com
TITLE: MICRO-02 Series		SIZE		DWG. NO.
C		REV		B
SCALE 12:1		SHEET 1 OF 1		

