
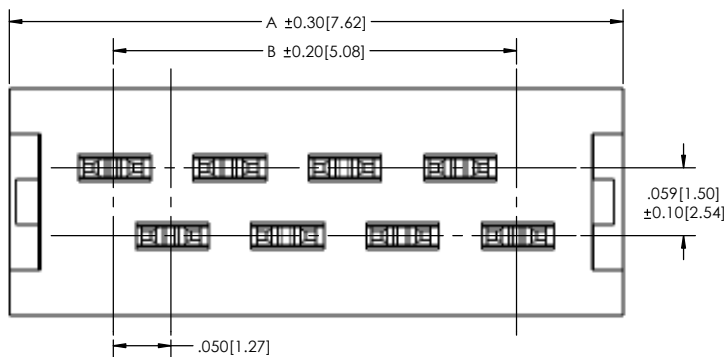
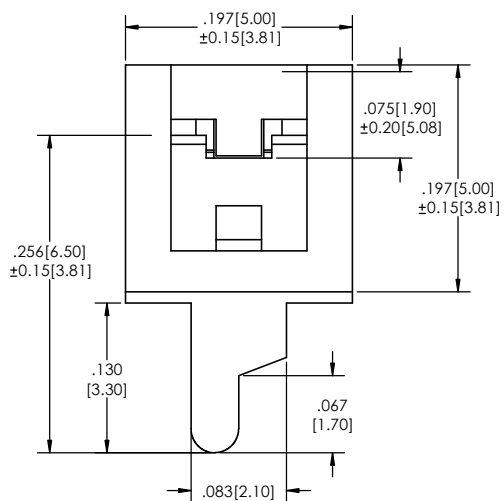


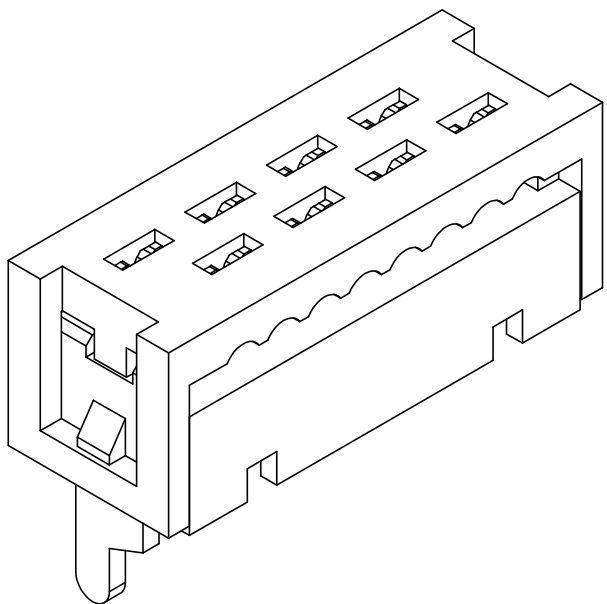

MICRO - 05 - **XX** - **LF**
(A) (B)

A. Pins Per Row
- 2 through 10
B. Lead Free

Specifications:
Current Rating: 1.0 Ampere
Insulation Resistance: 1000M Ohms Min.
Withstanding Voltage: 500V AC/DC
Contact Resistance: 20M Ohms Max.
Operation Temperature: -40°C to +105°C

Materials:
Contact Material: Phosphor Bronze
Insulator Material: PBT+15%GF(UL94V-0), Red
Contact Plating: Sn Over Ni
Packing: Tube without Pick and Place pad

Termination:
.050" ribbon cable
Contact MLE for Cable Assemblies

Mates With:
PCB

Pins Per Row	Dimension		Qt'y/ Tube
	A	B	
2	8.45	2.54	69
3	10.99	5.08	53
4	13.53	7.62	43
5	16.07	10.16	36
6	18.61	12.70	31
7	21.15	15.24	27
8	23.69	17.78	24
9	26.23	20.32	22
10	28.77	22.86	20

Tails may be clipped to achieve specific dimensions.
Products cut to specific sizes are uncancellable/ nonreturnable.
Parts are subject to change without notice.



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
Major League Electronics. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
Major League Electronics IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE
DIMENSIONS ARE IN INCHES		DRAWN	EOW	04/07/14
TOLERANCES:		CHECKED	GWE	04/07/14
ONE DECIMALS ±.100		ENG APPR.		
TWO DECIMAL ±.005		MFG APPR.		
THREE DECIMAL ±.002		ADDRESS:		
FOUR DECIMAL ±.002		2533 Centennial Blvd. Jeffersonville, In 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com		
NEXT ASSY		USED ON		FINISH
APPLICATION		DO NOT SCALE DRAWING		
		TITLE: MICRO-05 Series		REV A
		SIZE C		DWG. NO.
		SCALE 12:1		SHEET 1 OF 1

