

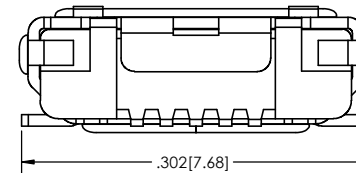

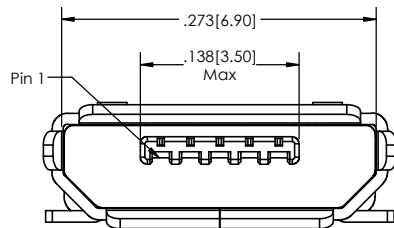


RECOMMENDED PCB LAYOUT

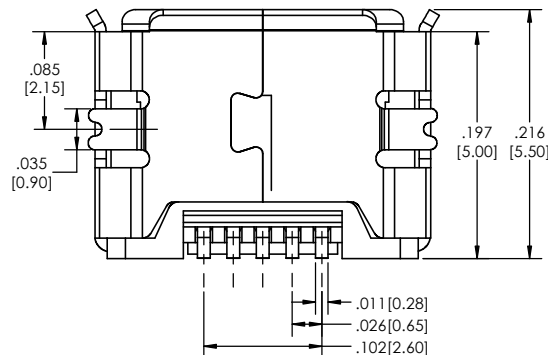

APPLICATION

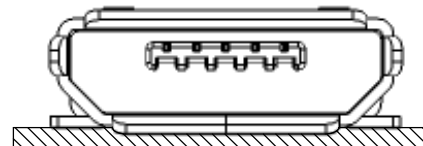

MUSB-2 **05** - **SSM** - **H** - **B** - **BM** - **TR** - **LF**
(A) **(B)** **(C)** **(D)** **(E)** **(F)** **(G)**

- A. Number of Contacts
 ~ 05 Positions
 B. Mounting Options
 ~ SSM= Shel Surface Mount
 C. Contact Plating
 ~ See plating Option box below
 D. Type
 ~ B
 E. Mount Style
 ~ BM= Bottom Mount
 F. Packaging Options
 ~ TR= Tape and Reel
 G. Lead Free

Plating options	
H	30µ Gold on Contact Area/ Matte Tin on Tail

- Specifications:
 Electrical:
 Voltage Rating: 100 V AC/DC
 Current Rating:
 Signal Mode: 1.0A AC/DC All Pins
 Power Mode:
 Signal (Pins 2, 3, 4): at 1.0A AC/DC
 Power (Pins 1, 5) at 1.8A AC/DC
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Dielectric Withstanding Voltage: 500V AC/ Minute
 Operating Temperature: -30°C to +85°C
 Mechanical:
 Mating Force: 35N Max.
 Unmating Force: 10N Min.
 Durability: 10,000 Cycles
 Material:
 Housing: LCP, UL94V-0, Black
 Terminal: Copper Alloy
 Shell: Stainless Steel (SUS304) T= 0.25mm
 Finish:
 Underplating: Nickel
 Plating:
 Contact Area: See Plating Options
 Solder Tails: Gold Flash or Matte Tin
 Metallic Shell: Matte Tin



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 Major League Electronics. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 Major League Electronics IS
 PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES		DRAWN	EOW 12/12/14
TOLERANCES:		CHECKED	GWE 12/12/14
ONE DECIMALS ±.100		ENG APPR.	
TWO DECIMAL ±.005		MFG APPR.	
THREE DECIMAL ±.002		ADDRESS:	
FOUR DECIMAL ±.002		2533 Centennial Blvd.	
NEXT ASSY USED ON		Jeffersonville, IN 47130	
APPLICATION		Phone: 812-670-4174	
DO NOT SCALE DRAWING		Fax: 812-670-4175	
		E-Mail: mle@mlelectronics.com	
		TITLE: MUSB-205-SSM-H-B-BM-TR-LF	
		SIZE DWG. NO. C	
		REV B	
		SCALE 12:1	
		SHEET 1 OF 1	

