
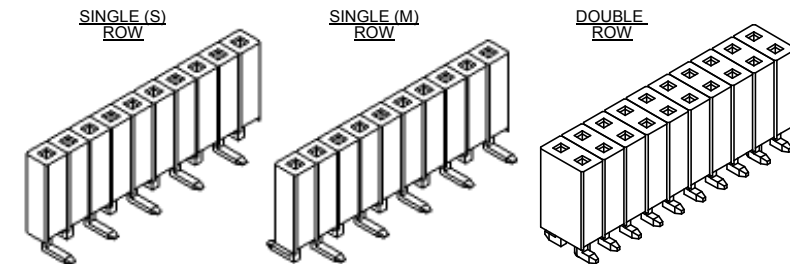
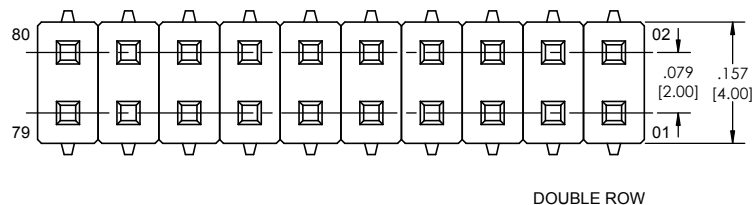
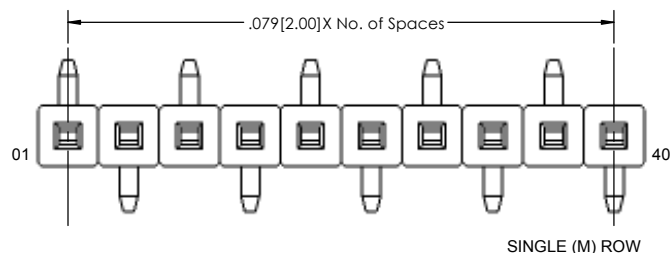
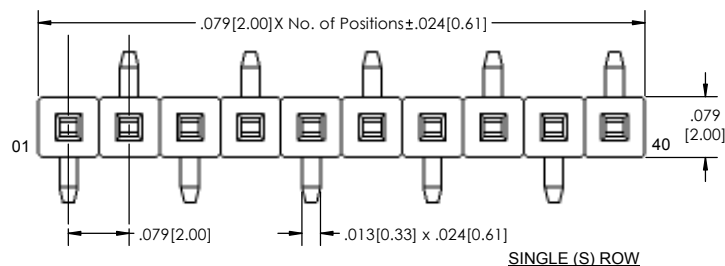

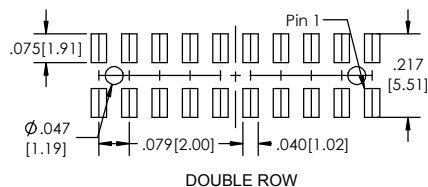
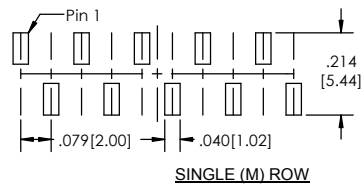


Recommended P.C. Board Layout SCALE 4:1

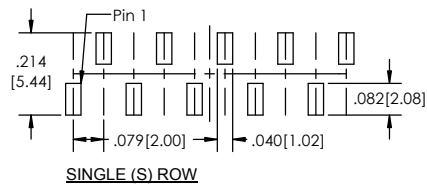

SSHSM-2 **(A)** **(B)** **(C)** **(D)** **(E)** **(F)** **(G)** **(H)** **(I)** **(J)** **(K)**

- A. Pins Per Row
- 1 through 40
- B. Row Specification
- S= Single Row
- D= Double Row
- C. Surface Mount
- D. Plating Options
- See Plating Options below
- E. Vertical
- F. Polarized Position
- Leave blank if not needed
- If required, specify empty pin position
- e.g. 012 for Pin 12
- G. Footprint
- S= pin 1 right
- M= pin 1 left
- H. Packing Information
- TR= Tape and Reel
- TB= Tube

Mates with:

BSTC	TSHR
BSTCM	TSHRE
BSTCR	TSHS
BSTCRSM	TSHSCM
BSTS	TTSHC
TBSC	TTSHCR
TBSCM	TTSHCRE
TBSTS	TTSHR
TSHC	TTSHRE
TSHCR	TTSHS
TSHCRE	TTSHSM
TSHCRSM	

- I. Pad
- P= Plastic
- K= Kapton
- O= No Pad
- If left blank packaging at MLE's discretion
Pad may be metal, mylar or plastic
- J. Alignment pin (only available for the Double Row)
- If not needed leave blank
- AP= with

K. Lead Free

Plating options	
G	-10µ Gold on Contact Area/ Flash on Tail
T	-Matte Tin all Over
GT	-10µ Gold on Contact Area/ Matte Tin on Tail
H	-30µ Gold on Contact Area/ Matte Tin on Tail
F	-Gold Flash over Entire Pin
FT	- Gold Flash on Contact Area/ Matte Tin on Tail

Specifications:

Insertion Force- Single Contact only- H Plating:
4oz: [1.11N] avg with .079 [2.00mm] sq. pin

Withdrawal Force- Single Contact only- H Plating:
3oz: [0.83N] avg with .079 [2.00mm] sq. pin

Current Rating: 2.0 Ampere

Insulation Resistance: 1000M Ohms Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 10M Ohms Max.


Operation Temperature: -40°C to +105°C

Max. Process Temperature
Peak: 260°C up to 10 secs.
Process: 230°C up to 60 secs.
Wave: 260°C up to 6 secs.
Reflow: 260°C up to 10 secs.
Manual Solder: 350°C up to 5 secs.

Materials:
Contact Material: Phosphor Bronze
Insulator Material: Nylon 6T
Plating: Au or Sn over 50µ" (1.27) Ni

Tails may be clipped to achieve specific dimensions.
Products cut to specific sizes are uncancellable/ nonreturnable.
Parts are subject to change without notice.

APPLICATION

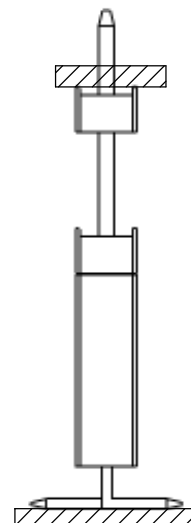

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Major League Electronics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Major League Electronics IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		TITLE: SSHSM-2-V SERIES SIZE C DWG. NO. C REV C SCALE 8:1 SHEET 1 OF 1
DIMENSIONS ARE IN INCHES		DRAWN	EOW	01/21/15		
TOLERANCES:		CHECKED	GWE	01/21/15		
ONE DECIMALS ±.100		ENG APPR.				
TWO DECIMAL ±.010		MFG APPR.				
THREE DECIMAL ±.005		INTERPRET GEOMETRIC TOLERANCING PER:				
FOUR DECIMAL ±.002		MATERIAL				
NEXT ASSY	USED ON	FINISH				
APPLICATION		DO NOT SCALE DRAWING				
		ADDRESS:		2533 Centennial Blvd. Jeffersonville, In 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@ml-electronics.com		