


Polar diagram

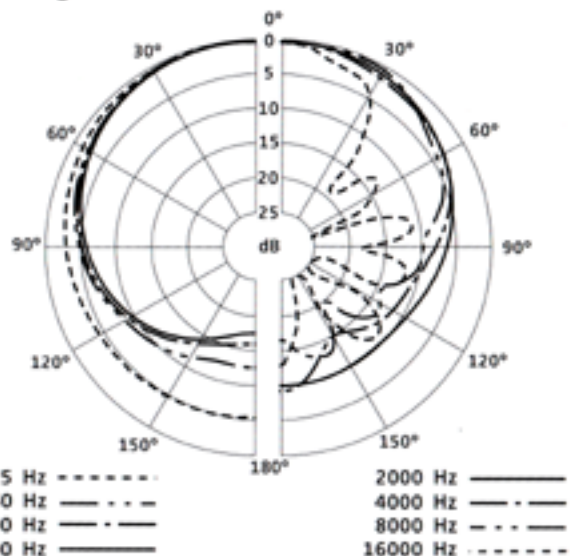

Specifications

Transducer principle	dynamic
Frequency response	40 – 16,000 Hz
Pick-up pattern	cardioid
Sensitivity (free field, no load)	0.6 mV/Pa (at 60 Hz) 0.2 mV/Pa (at 1 kHz)
Nominal impedance (at 1 kHz)	350 Ω
Min. terminating impedance	1 k Ω
Connector	XLR-3
Weight	440 g
Dimensions	diam.: 60 mm, length: 128.5 mm

Frequency response curve

