

THE MOST EFFICIENT

EPA-Certified Stick Wood Burning Appliances***



UP TO
\$2000
TAX CREDIT*
On qualifying models and installation



**Titanium-Enhanced
Stainless Steel Firebox**



CLASSIC EDGE 360
TITANIUM HDX

Tested Efficiency (LHV) - 88.4%**
Tested Efficiency (HHV) - 82.2%**
Mfr's Rated Heat Output Capacity -
150,000 Btu/hr
Heat Output (12 hr) - 66,894 Btu/hr

Firebox Volume - 10 cubic ft
Firebox Dimensions - 28"L x 29"H x 21"W
Door - 16"W x 16"H
Ash Cleanout Door - 18"W x 9"H
Water Capacity - 150 gal.
Weight - 1,365 lbs
One set of 1-1/4" Supply and Return Ports
Can be configured for two pumps.

Furnace Options and Accessories:

- LED Light Kits
- Pump Panel Extension Kit



CLASSIC EDGE 560
TITANIUM HDX

Tested Efficiency (LHV) - 90.2%**
Tested Efficiency (HHV) - 83.8%**
Mfr's Rated Heat Output Capacity -
200,000 Btu/hr
Heat Output (12 hr) - 92,417 Btu/hr

Firebox Volume - 14 cubic ft
Firebox Dimensions - 33"L x 32"H x 23"W
Door - 18"W x 18"H
Ash Cleanout Door - 18"W x 9"H
Water Capacity - 205 gal.
Weight - 1,668 lbs
One set of 1-1/4" Supply and Return Ports
Can be configured for two pumps.
Bypass Door and Alarm

Furnace Options and Accessories:

- LED Light Kits
- Pump Panel Extension Kit



CLASSIC EDGE 760
TITANIUM HDX

Tested Efficiency (LHV) - 89.8%**
Tested Efficiency (HHV) - 83.4%**
Mfr's Rated Heat Output Capacity -
245,000 Btu/hr
Heat Output (12 hr) - 146,686 Btu/hr

Firebox Volume - 23 cubic ft
Firebox Dimensions - 37"L x 44"H x 26"W
Door - 21"W x 25"H
Ash Cleanout Door - 19"W x 11"H
Water Capacity - 330 gal.
Weight - 2,036 lbs
One set of 1-1/4" Supply and Return Ports
Two sets of 3/4" Supply and Return Ports
Bypass Door and Alarm

Furnace Options and Accessories:

- LED Light Kits



CLASSIC EDGE 960
TITANIUM HDX

Tested Efficiency (LHV) - 92.1%**
Tested Efficiency (HHV) - 85.6%**
Mfr's Rated Heat Output Capacity -
400,000 Btu/hr
Heat Output (12 hr) - 212,957 Btu/hr

Firebox Volume - 32 cubic ft
Firebox Dimensions - 42.75"L x 43.5"H x 31.5"W
Door - 22.75"W x 28.75"H
Ash Cleanout Door - 20"W x 11"H
Water Capacity - 420 gal.
Weight - 2,714 lbs
One set of 1-1/4" Supply and Return Ports
Two sets of 3/4" Supply and Return Ports
Bypass Door and Alarm

Furnace Options and Accessories:

- LED Light Kits

The outdoor furnace must be installed in accordance with all applicable codes and regulations. *On qualified models and installation. US Internal Revenue Code Sec. 25(C) effective Jan. 1, 2023, for heating a residence. For more details visit CentralBoiler.com. Consult a tax professional with any questions. **Test efficiencies are available on Central Boiler website. ***At 92% overall efficiency (LHV), the Classic Edge 960 HDX provides the highest efficiency of EPA Certified stick-wood burning appliances compared to outdoor appliances with a maximum output greater than 300,000 Btu/hr (EPA cord wood Hydronic Heater List 12/22/2022).

The Ultimate Wood Heat



**CLASSIC
EDGE™**
TITANIUM HDX



The FireStar® combustion controller constantly monitors how the wood is burning and adds air where and when it's needed for the cleanest, most efficient combustion.

Reserve Mode - reserves a portion of the previous wood load so you'll never to relight a fire

Burning Time Monitor - helps to estimate how much wood is left

Clean Reload - Can eliminate smoke when you open the firebox door to add wood


Text Alerts - optional feature that can notify you when it's time to add wood

MyFireStar.com - the FireStar Controller with onboard Wi-Fi, Reserve Mode, Burning Time Monitor and Clean Reload keeps you informed of your furnace's performance and operations from anywhere.

When the fire needs a lot of air (such as during startup), FireStar instructs the stepper motors to open the air regulating discs precisely to deliver the amount of air needed.



The patented vertical Easy View® Heat Exchanger with hinged door provides full access without the use of tools.

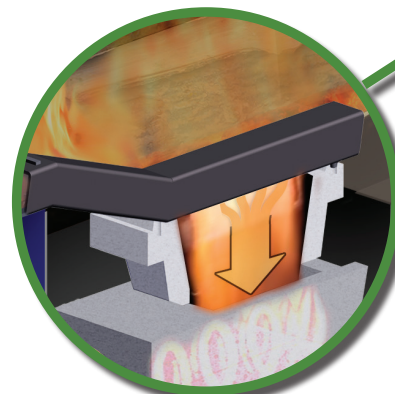


The patented Air Charge Tube keeps coals from falling into the Reaction Chamber and directs oxygen into the Fusion Combustor. It also helps the furnace to relight faster.



Classic Edge
760 HDX
shown



Super-heated gases enter the round chamber of the Afterburner and swirl in a turbulent vortex, creating a **fireball** and allowing enough time for complete combustion to occur.

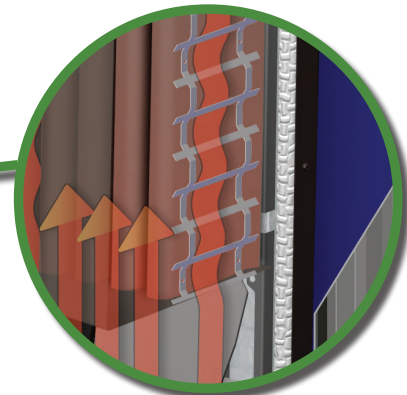

Turbulators in the heat exchanger cause turbulence of the exhaust gas flow through the exchanger. This forces the heated exhaust to better contact the heat exchanger and transfer more of its energy to the surrounding water jacket before exiting out the chimney.



Classic Edge
960 HDX
shown

The Classic Edge's titanium-enhanced stainless steel firebox ensures zero corrosion inside the firebox. With properly treated water, these Titanium Series furnaces can last a lifetime.