


HR6

HR6 is for use during low-pressure, textile reinforced applications that include petroleum and water-based fluids for use in power steering return, lube lines and air lines. HR6 is not intended for brake applications.

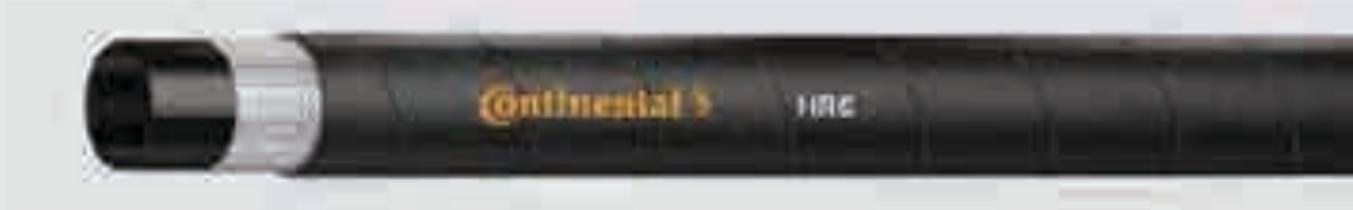

PERFORMANCE + SPECS

Meets or exceeds the performance requirements of:

SAE 100R6
EN 854 R6

Inner Tube
NBR (Nitrile)

Reinforcement
One textile braid

Cover
Black CSM (Chlorosulfonated Polyethylene)

Temperature Range
-40 F to 275 F (-40 C to 135 C)

KEY FEATURES

 **Handles high temperature**

 **4:1 Safety Factor**

BRANDING



HR6 08

SAE 100R6 / EN 854 R6
1/2" (DN12)

400 PSI (2.8 MPa)

MADE
IN USA

#	SAP	Hose Size ID	Hose OD	Max. Working Pressure		Min. Bend Radius		Weight	Fitting	
Part Number	SAP Number	in.	in.	mm	psi	MPa	in.	mm	lbs./ft.	
HR6-04	20687451	1/4	0.51	12.9	400	2.8	2.5	64	0.09	UC
HR6-05	20788391	5/16	0.57	14.5	400	2.8	3.0	76	0.09	UC
HR6-06	20687409	3/8	0.64	16.2	400	2.8	3.0	76	0.11	UC
HR6-08	20743641	1/2	0.77	19.6	400	2.8	4.0	102	0.16	UC
HR6-10	20616767	5/8	0.91	23.2	350	2.4	5.0	127	0.18	UC
HR6-12	20645813	3/4	1.06	26.9	300	2.1	6.0	152	0.25	UC

HR6
Low Pressure

Compatible Fittings

All fittings compatible with HR6 are listed in Section 5 (starting on page 242).

HOSE

