


Extended Life XCP4

Extended Life XCP4 is made for very high-pressure hydraulic applications requiring extra abrasion resistance. This hose has excellent impulse performance and flexibility.

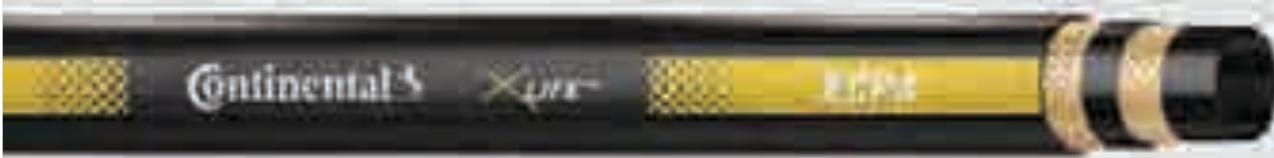

PERFORMANCE + SPECS

Meets or exceeds the performance requirements of:

SAE 100R19
ISO 11237 R19

Meets flame resistance
USMSHA Designation

SAE J1942/U.S. Coast Guard

Inner Tube NBR (Nitrile)

Reinforcement

Two braids of high-tensile steel wire

Cover

Black synthetic rubber with superior abrasion-, oil- and weather-resistance

Temperature Range

-40 F to 212 F (-40 C to 100 C)

KEY FEATURES

 **Extended Life Cover**

 **Handles constant pressure**

 **4:1 Safety Factor**

BRANDING



X Lb™ XCP4- 08

SAE 100R16
ISO 11237 / R19 12.5

400 PSI

28.0 MPa
280 BAR

MSHA 2G-1C-14C/37

MADE
IN USA

#	SAP	Hose Size ID	Hose OD	Max. Working Pressure	Min. Bend Radius	Weight	Fitting			
Part Number	SAP Number	in.	in.	mm	psi	MPa	in.	mm	lbs./ft.	
XCP4-04	20827919	1/4	0.54	13.8	4060	28	2.0	50.8	0.26	B2
XCP4-06	20826087	3/8	0.69	17.6	4060	28	2.5	63.5	0.30	B2
XCP4-08	20828100	1/2	0.82	20.9	4060	28	3.5	88.9	0.42	B2
XCP4-10	20828101	5/8	0.95	24.2	4060	28	4.0	101.6	0.48	B2
XCP4-12	20826123	3/4	1.14	29.0	4060	28	5.0	127.0	0.66	B2

HOSE



Extended Life XCP4

Constant Pressure / Very High Pressure

Compatible Fittings

All fittings compatible with XCP4 are listed in Section 1 (starting on page 131).