



## Male O-Ring (O.R.B.) X J.I.C. Swivel Nut (37°)

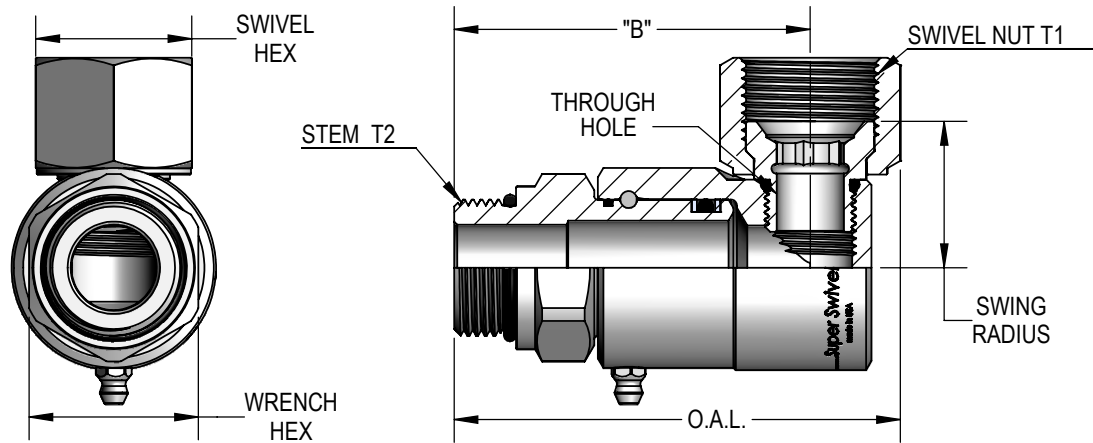

| PART NUMBER            | O.A.L. | DIM. B | SWIVEL HEX | WRENCH/HEX | SWIVEL NUT T1  | STEM T2        | SWG. RADIUS | MAX P.S.I.G. | THROUGH HOLE |
|------------------------|--------|--------|------------|------------|----------------|----------------|-------------|--------------|--------------|
| 9 SS 4 MO 6 X FJS 4    | 2.727  | 2.215  | 0.562      | 0.750      | 7/16-20 U.N.   | 9/16-18 U.N.   | 1.171       | 3500         | 0.165        |
| 9 SS 4 MO 6 X FJS 6    | 2.727  | 2.215  | 0.687      | 0.750      | 9/16-18 U.N.   | 9/16-18 U.N.   | 1.167       | 3500         | 0.250        |
| 9 SS 8 MO 8 X FJS 6    | 2.923  | 2.376  | 0.687      | 1.000      | 9/16-18 U.N.   | 3/4-16 U.N.    | 1.283       | 3500         | 0.290        |
| 9 SS 8 MO 8 X FJS 8    | 2.953  | 2.376  | 0.875      | 1.000      | 3/4-16 U.N.    | 3/4-16 U.N.    | 1.254       | 3500         | 0.290        |
| 9 SS 8 MO 10 X FJS 10  | 3.075  | 2.498  | 1.000      | 1.000      | 7/8-14 U.N.    | 7/8-14 U.N.    | 1.017       | 4500         | 0.320        |
| 9 SS 12 MO 12 X FJS 12 | 3.470  | 2.749  | 1.250      | 1.375      | 1 1/16-12 U.N. | 1 1/16-12 U.N. | 1.040       | 4500         | 0.460        |
| 9 SS 16 MO 16 X FJS 16 | 4.276  | 3.411  | 1.500      | 1.625      | 1 5/16-12 U.N. | 1 5/16-12 U.N. | 1.277       | 4000         | 0.650        |
| 9 SS 20 MO 20 X FJS 20 | 4.909  | 3.755  | 2.000      | 1.875      | 1 5/8-12 U.N.  | 1 5/8-12 U.N.  | 1.403       | 4000         | 0.790        |
| 9 SS 24 MO 24 X FJS 24 | 5.830  | 4.540  | 2.250      | 2.125      | 1 7/8-12 U.N.  | 1 7/8-12 U.N.  | 1.699       | 4000         | 0.920        |

## Male J.I.C. (37°) X J.I.C. Swivel Nut (37°)

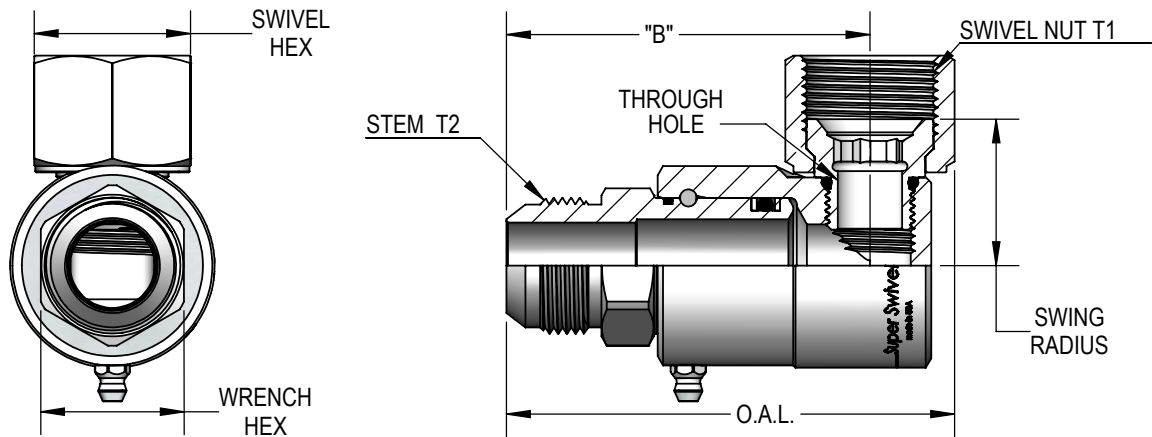

| PART NUMBER            | O.A.L. | DIM. B | SWIVEL HEX | WRENCH/HEX | SWIVEL NUT T1  | STEM T2        | SWG. RADIUS | MAX P.S.I.G. | THROUGH HOLE |
|------------------------|--------|--------|------------|------------|----------------|----------------|-------------|--------------|--------------|
| 9 SS 4 MJ 6 X FJS 4    | 2.887  | 2.375  | 0.562      | 0.625      | 7/16-20 U.N.   | 9/16-18 U.N.   | 1.171       | 3500         | 0.165        |
| 9 SS 4 MJ 6 X FJS 6    | 2.887  | 2.375  | 0.687      | 0.625      | 9/16-18 U.N.   | 9/16-18 U.N.   | 1.167       | 3500         | 0.250        |
| 9 SS 8 MJ 8 X FJS 6    | 3.070  | 2.523  | 0.687      | 1.000      | 9/16-18 U.N.   | 3/4-16 U.N.    | 1.283       | 3500         | 0.290        |
| 9 SS 8 MJ 8 X FJS 8    | 3.100  | 2.523  | 0.875      | 1.000      | 3/4-16 U.N.    | 3/4-16 U.N.    | 1.254       | 3500         | 0.290        |
| 9 SS 8 MJ 8 X FJS 10   | 3.100  | 2.523  | 1.000      | 1.000      | 7/8-14 U.N.    | 3/4-16 U.N.    | 1.017       | 4500         | 0.320        |
| 9 SS 8 MJ 10 X FJS 10  | 3.200  | 2.623  | 1.000      | 1.000      | 7/8-14 U.N.    | 7/8-14 U.N.    | 1.017       | 4500         | 0.320        |
| 9 SS 12 MJ 12 X FJS 12 | 3.606  | 2.885  | 1.250      | 1.125      | 1 1/16-12 U.N. | 1 1/16-12 U.N. | 1.040       | 4500         | 0.460        |
| 9 SS 16 MJ 16 X FJS 16 | 4.348  | 3.482  | 1.500      | 1.375      | 1 5/16-12 U.N. | 1 5/16-12 U.N. | 1.277       | 4000         | 0.650        |
| 9 SS 20 MJ 20 X FJS 20 | 4.989  | 3.835  | 2.000      | 1.750      | 1 5/8-12 U.N.  | 1 5/8-12 U.N.  | 1.403       | 4000         | 0.790        |
| 9 SS 24 MJ 24 X FJS 24 | 6.000  | 4.710  | 2.250      | 2.000      | 1 7/8-12 U.N.  | 1 7/8-12 U.N.  | 1.699       | 4000         | 0.920        |