

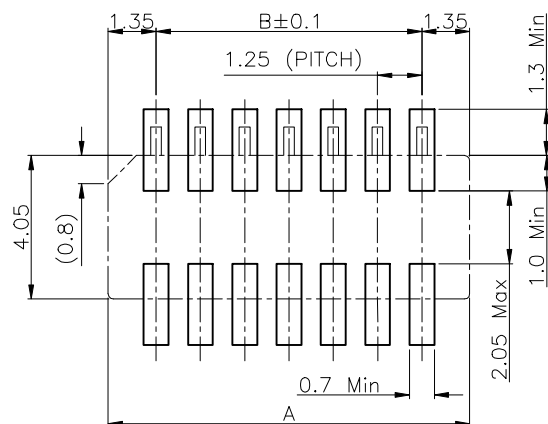
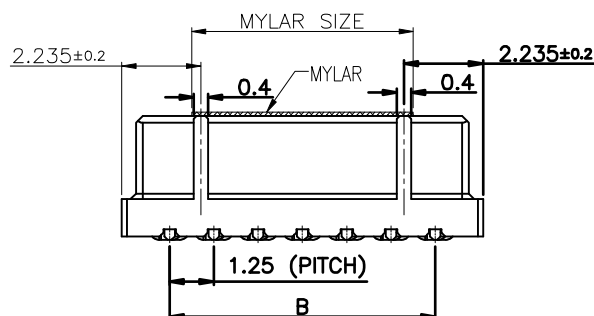
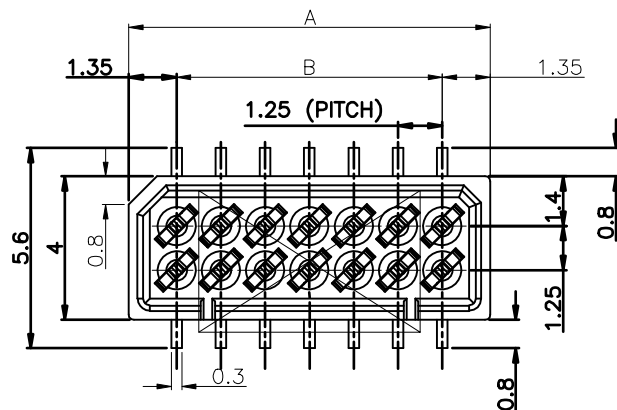




RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

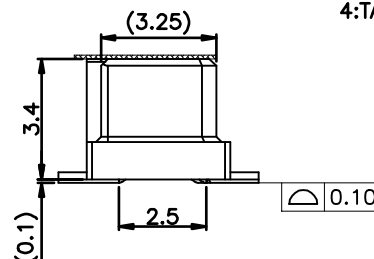

MATING DRAWING

NOTES:

- MATERIAL:
 - HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0;
 - CONTACT: COPPER ALLOY
- FINISH:
 - CONTACT:
50u" MIN. NICKEL UNDER PLATING OVERALL
N:100~200u" MATTE TIN PLATING OVERALL
- REFLOW SOLDER CAPABLE TO 260°C
PER ACES SPEC.
- SPEC. PLS. REFER TO PS-51035-XXXXX-XXX
- PART NUMBER

51036-XXX	X	X-XXX	XXX	HOUSING COLOR	PACKING
NO OF CKT			001	BLACK	51036-XXXXCR-00
			002	NATURAL	51036-XXXXCR-U
PACKING				PLATING	N:100~200u" MATTE TIN PLATING OVERALL
4:TAPE & REEL WITH MYLAR					

CKT	Dim A	Dim B	MYLAR SIZE
14	10.20	7.50	6.25

QUALITY SYMBOLS MAJOR Ⓢ CRITICAL Ⓢ GENERAL TOLERANCES (UNLESS SPECIFIED) X ± 0.5 X ± 0.25 XX ± 0.15 XXX ± 0.1 ANGLES $\pm 2^\circ$	DESIGNED BY ZHANG HAO	DATE 18/11/22	ACES ELECTRONICS	
	CHECKED BY BRAVE	DATE 18/11/22		
	APPROVED BY BRAVE	DATE 18/11/22	1.25mm BTB D/R RCPT SMT S/T TYPE	
	UNITS mm	SCALE 5:1	SIZE A4	REQ. NO. NA
	SHEET NO. 1 OF 1	REV B	PART NO. SEE NOTES	DATE 51036-XXXXX-XXX