

# Palmer

*An economical solution to a wide-range of applications.*

## 15PB, 20PB, 25PB, 40PB Painted Steel Case Gauges

### FEATURES

- Corrosion Resistant Black Painted Steel
- Movement is low friction durable brass
- Economical
- General industrial use where high accuracy or rugged applications are not needed

### SPECIFICATIONS

Case:	Corrosion Resistant Black Painted Steel. 1-1/2" (40mm), 2" (50mm), 2-1/2" (63mm), and 4" (100mm) diameter.
Fill:	Dry
Window:	Acrylic. Instrument Glass on 4".
Socket:	Brass or Phosphor Bronze.
Connection:	1/8" NPT on 1-1/2", 1/4" NPT on 2", 2-1/2" and 4". Optional 1/4" to 1/2" SS Adapter.
Accuracy:	1-1/2", 2", and 2-1/2" gauges are $\pm 2\%$ mid-range. 4" gauges are $\pm 1.5\%$ mid-range.
Bourdon Tube:	Brass or Phosphor Bronze.
Movement:	Low friction, durable Brass.
Pointer:	Painted Black Aluminum, non-adjustable.
Dial:	White Aluminum with black markings in accordance with ASME B40.1 -2005.
Range Availability:	PSI, Metric, and Dual Scales. NON-STOCK may require a 5 piece minimum per range.
Process Temperature Limits:	-25° to +80°C / -13° TO 176°F

*Specifications subject to change without notice.*

### BENEFITS

- Low cost general purpose gauge

25PB



25PB Back


IP40  
COMPLIANT

ONE YEAR  
1  
WARRANTY

TRACEABLE TO  
NIST

**Palmer Wahl**  
BEYOND THE SCALE

# ORDERING GUIDE

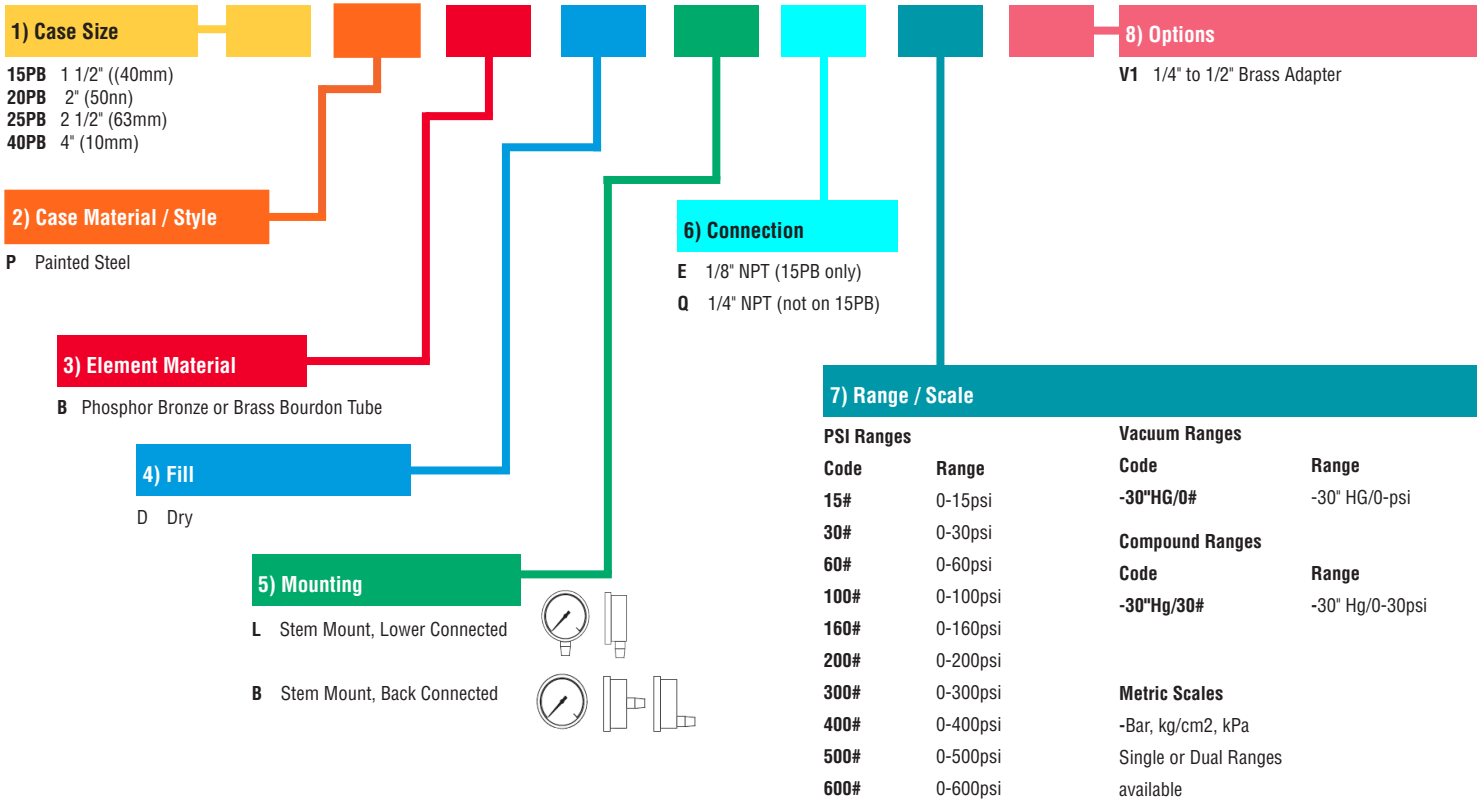

### Example of a typical pressure gauge part number configuration:



**Please Note: Not all configurations are available! Minimum order quantities may apply.**

**If not in Stock, minimum order is 100 pieces PER CASE SIZE AND RANGE. Mounting style can be mixed within Case size and Range to achieve minimum.**