

# THE CODALE CONIC CANOPY

## Data Sheet

The Codale Conic is a steel freestanding canopy which is covered with a waterproof tensile fabric roof. (Please note: the image shows a double Codale Conic.)

### Dimensions:

Length:	3m - unlimited (up to 7m for a single canopy)
Width/Projection:	3m - unlimited (up to 7m for a single canopy)
Height:	4.1m to 4.7m
Spacing Between Posts:	Up to 7 metres



0800 389 9072

[www.ablecanopies.co.uk](http://www.ablecanopies.co.uk)  
[sales@ablecanopies.co.uk](mailto:sales@ablecanopies.co.uk)

### Features:

Wall Mounted or Freestanding:	Freestanding
Suitable for:	Education   Hospitality   Leisure   Retail   Commercial   Healthcare
Guarantee:	10 years for the frame and 5 years for the fabric
Life Expectancy:	15 years
Maintenance:	Requires only periodic cleaning
Installation Type:	Permanent
Retractable/Collapsible:	No
Method of Fixing:	Posts are installed into the ground with steel base plates into pad stones, the size of which depends on the size of the structure

### Frame Specifications:

Construction Material:	Frame: 100mm x 150mm steel box sections Posts: 150mm x 150mm steel box sections
Guttering:	Integrated into the canopy posts
Frame Finish:	Powder coated and galvanised or galvanised only
Colour Options:	Supplied in any of the standard RAL colours shown overleaf Other RAL colours are available however, they may incur additional costs
Fixings:	Steel fixings



### Roof Specifications:

Roof Frame:	Steel roof bars
Roof Covering:	Polyester 1100 dtex waterproof tensile fabric with a weight of 650 g/sqm
UV Protection:	Up to 100% protection from harmful UVA and UVB rays
Light Transmission:	The amount of light transmittance depends on the colour chosen
Strength:	The tensile fabric has a strength of 250/230 da N/5 cm
Colour Options:	Available in a range of colours as shown overleaf
Temperature Resistance:	-30°C to +70°C

## International Standards:

<b>Fire Ratings:</b>	Fabric: Fire retardant to British standards BS7157, BS7837 and European M2 classification
<b>Strength Tests:</b>	Fabric tensile strength: 250/230 daN/5cm Fabric tear strength: 30/30 daN
<b>CE Marked</b>	Yes to UKCA BS EN1090-1:2009+A1:2011

## Colour Options:

	Standard Colours	Non Standard Colours (Additional costs may apply)
<b>Framework</b>	Our standard RAL colours are: 	N/A
<b>Tensile Roof Covering</b>		N/A

## Weather Protection:





## Available Upgrades:

Post Pads	✓
Signage	✗
Polycarbonate Side & Front Fills	✗
Tensile Fabric Side Panels	✓
Rainbow Package	✓
Roller Shutters	✓
Coloured Polycarbonate	✗
Heaters and Lighting	✓

## Technical Files Available:

PDF CAD File	✓
DXF CAD File	✓
IGES CAD File	✓
STL CAD File	✓
BIM File	✓
NBS Spec	✓

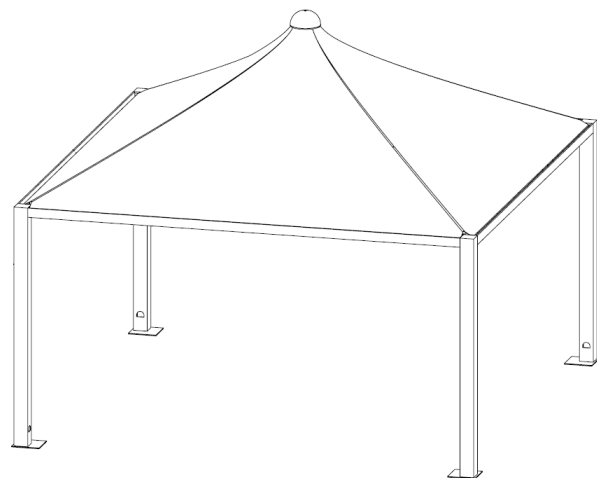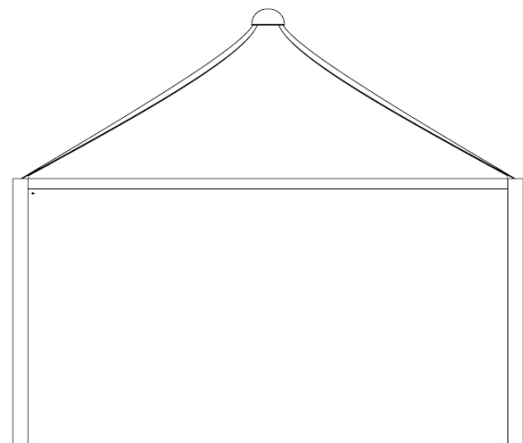

0800 389 9072

[www.ablecanopies.co.uk](http://www.ablecanopies.co.uk)

[sales@ablecanopies.co.uk](mailto:sales@ablecanopies.co.uk)

9-11 Faraday Close, Gorse Lane Industrial Estate, Clacton on Sea, Essex CO15 4TR

V1.4 LU190224