


PRODUCT SUBMITTAL



Copper Aqua Flash (Copper / Rubberized Asphalt)

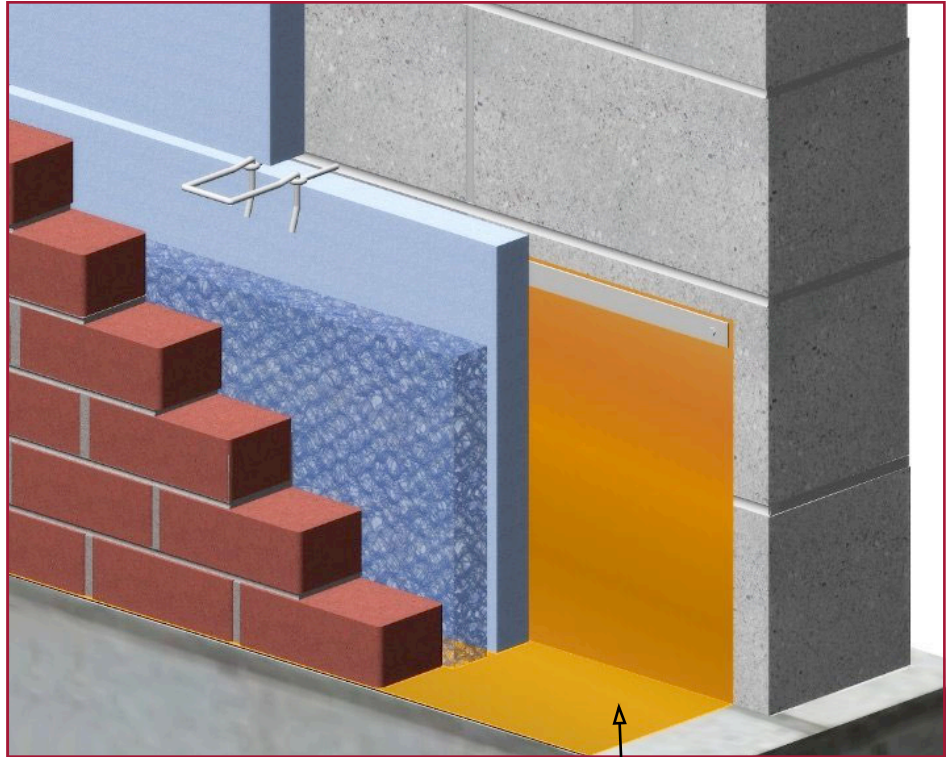

Copper Aqua Flash

COMPOSITION / MATERIALS

A 40 mil thick copper sheet membrane flashing consisting of either a 3 oz. solid sheet of copper which is laminated on one side with polyester film and bonded on the other with a highly adhesive bitumen with a release liner.

Description:

An innovative sheet membrane flashing using 3 oz. copper which is coated with polyester film on one side and bonded to a thick layer of rubberized asphalt on the other.

This encapsulation not only protects the copper, but the rubberized asphalt provides an additional layer of water-proofing. Unlike non-rubberized asphalt which will start to crack over a period of time, the rubberizing significantly increases the longevity of the asphalt coating and therefore the life of the copper flashing. The peel and stick feature make the installation easier and more economical over traditional copper composites. Copper AQUA FLASH has a warranted longevity.

Use WireBond Flashing Mastic to seal all laps and joints.

SIZES / WEIGHT

Solid Copper Sheet:

3 oz standard weight

Sizes:

Standard roll widths:

12" 16" 18" 24" 36"

Standard roll length: 50 lineal feet.

Custom sizes available

Uses:

Thru-Wall, Base, Spandrel, Parapet, Foundation Sill, Head and Sill, and Deck flashing and Termite Barrier. Can be applied to concrete, pre-cast concrete, masonry, steel, wood.



Corporate Office: 400 Roundtree Rd Charlotte, NC 28217

TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113

TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113