FRIGIDAIRE.

Home Comfort

FFHP362ZQ2



FFHP362ZQ2 Outdoor

Signature Features

Quick Cool & Quick Warm

When you need to cool down quickly or warm up faster, use the quick cool/warm mode to speed up the fan.

Effortless™ Temperature Control

Our air conditioners maintain the preset room temperature, so you will remain comfortable at all times.

Programmable 24-Hour On/Off Timer

Customize times to fit your schedule for immediate comfort when you get home. The built-in timer allows you to preset the unit to turn on and off in half-hour increments.

Sleep Mode

Maximum comfort throughout the evening hours with the added benefit of energy savings. With Sleep Mode, the temperature gradually increases a few degrees over the evening.

Multi-Zone Outdoor Condenser

Product Dimensions Condenser (Outdoor) Model

 Height
 43-7/16"

 Width
 42-13/16"

 Depth
 17-5/16"

More Easy-To-Use Features

Multi-Speed Fan

Features three different fan speeds, for more cooling flexibility.

Effortless™ Restart

Automatically resumes operating at its previous settings when power is restored to your unit.

Easy-to-Clean Washable Filter

Capture dust from the air and keep your air conditioner working efficiently with our easy-to-clean washable filter.

Ready-Select® Controls

Easily select options with the touch of a button.

Electronic Controls


Allow you to set the comfort level to your preference, while a convenient temperature readout displays the set temperature.

Performance	BTUs
Cool	34,400
Heat	42,500

FRIGIDAIRE.

Model Numbers	
Set Model Number	FFHP362ZQ2
Outdoor Unit Part Number	FFHP362ZQ2
Performance	
BTU (Cool)	34,400
BTU (Heat Pump)	42,500
Cooling Area (Sq. Ft.)	2,225
SEER (Air Conditioner)	19.0
HSPF (Heat Pump)	9.0
Inverter Technology	Yes
СОР	3.0
Electrical	
Volts	230V/208V
Min Circuit Ampacity	21 A
Maximum Circuit Breaker	35 A
Rated Amps (Cool)	16.42
Rated Watts (Cool)	3,125
Rated Amps (Heat)	15.6
Rated Watts (Heat)	4,150
Features	
Controls	Ready-Select® Controls
Fan Speeds (Cool/Fan/Heat)	3/3/3
Low Voltage Start-Up	Yes
Turbo Fan	
Auto Fan	
Energy Saver	
Sleep Mode	
24-Hour On/Off Timer	
Remote Control	
Air CFM (High/Med/Low) Indoor	
Air Direction Control (Vert./Horz.)	
Air Discharge (Full-Width)	
Filter Type	
Filter Access	
dB Indoor (High/Med/Low)	
dB Outdoor	61
Warranty ¹	Yes
Included Accessories	
Drain Kit (Outdoor Unit)	Yes

¹5 year parts only

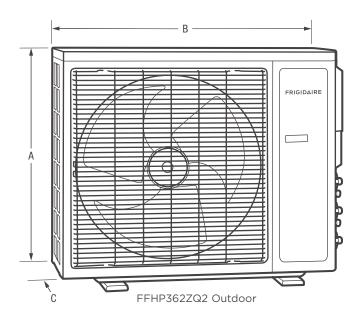

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A-Height	43-7/16"
B-Width	42-13/16"
C-Depth	17-5/16"

All refrigeration and electrical work must be performed by a certified and licensed refrigeration technician for full parts and labor warranty validation. Insulated line sets and control wires are required and available for Frigidaire split systems in 25 ft. length. Each line set is equipped with flare nuts on both ends. Each system requires one line set for each indoor unit installed.

Accessories information available on the web at **frigidaire.com**


Multi-Zone Outdoor Condenser Submittal Sheet

FFHP362ZQ2

GI	D	\	_
		N	

Job:	Reference:	Construction:
Location:	Approval:	Unit Number:
Engineer:	Date:	Drawing Number:
Submitted to:	Submitted by:	

Power	
Min Circuit Ampacity	21 A
Maximum Circuit Breaker	35 A
Capacities	
Cooling	34,400 BTU
Cooling Watts	3,125 W
Min/Max Cooling	8,800 BTU/35,800 BTU
Heatpump Capacity (BTU)	42,500 BTU
HSPF	9.0
Outdoor Sound Rating	61 dB (A)
SEER	19.0
EER	11.0
Low Ambient Cooling	-5° - 110°F
Low Ambient Heating	5¢ 75
Voltage/Frequency/Phase	230/208/60Hz
Dehumidification	



Outdoor Unit	FFHP362ZQ2
Dimensions (H x W x D)	43-7/16" x 42-13/16" x 17-15/16"
Sound Rating	61 dB (A)
Net Weight	198 lb
Shipping Weight	216 lb
Fan Motor Load	.82 A
Drive Type	inverter
CFM (high)	2,665
Fan Type	Axial-flow
Fan Diameter/Number of Speeds	
Number of Poles and RPM	850/690/450
Coil Type	
Fin Type	
Pipe Type	
Fin Rows (FPI)	
Tube Size	
Features	
Controls	electronic
Remote Control	
Temperature Control	
Timer	
Air Louvers	
Horizontal	
Vertical	
Low Voltage Restart	
Self-Diagnosis	yes
Air Filter	
Refrigerant System	
Refrigerant	R410A
Ounces	128.75
Lineset	
Maximum Height	
Maximum Line Length	
Discharge Vapor Line (od)	
Suction (od)	
Operating Range	
Indoor Air Cooling Intake Temp Range	>= 61°F
Indoor Air Heating Intake Temp Range	<= 86°F
Outdoor Air Cooling Intake Temp Range	-5¢ 110°F
Outdoor Air Heating Intake Temp Range	-5¢ 75°F

