



Тубо TU14/15

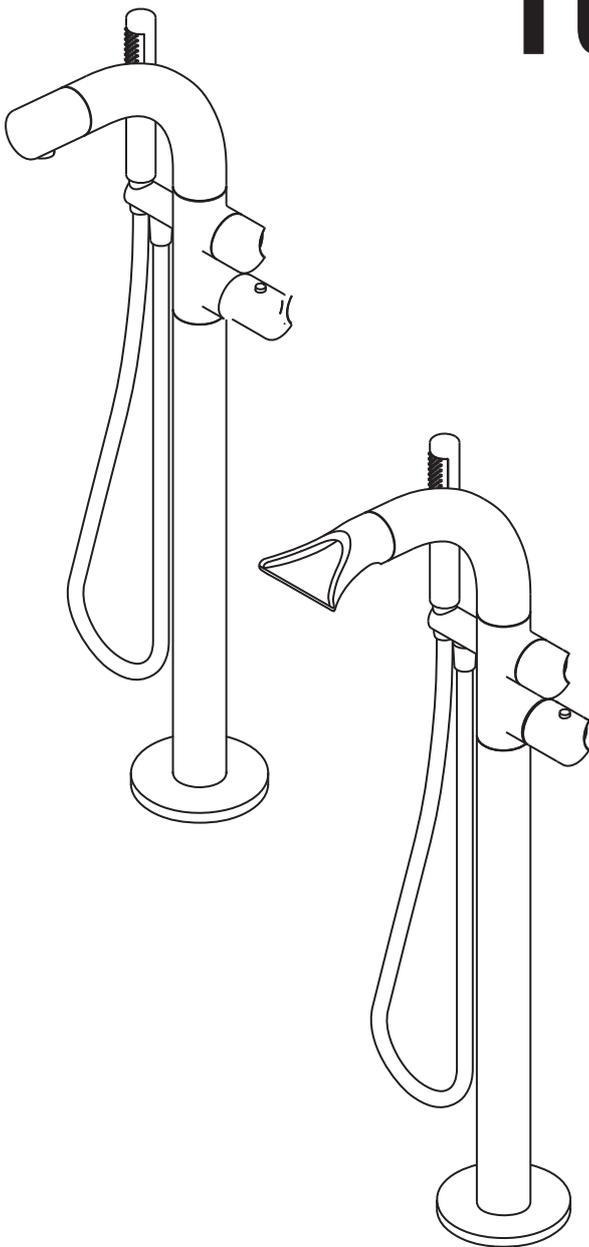


Fitting instructions
Notice d'installation
Instrucciones de montaje
Montageanleitung
Istruzioni di montaggio
Montagehandleiding
Instrukcja montażu
Указания по креплению


A

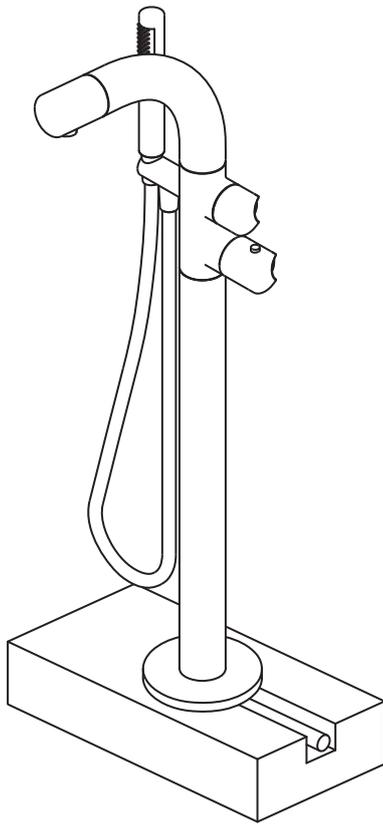


B

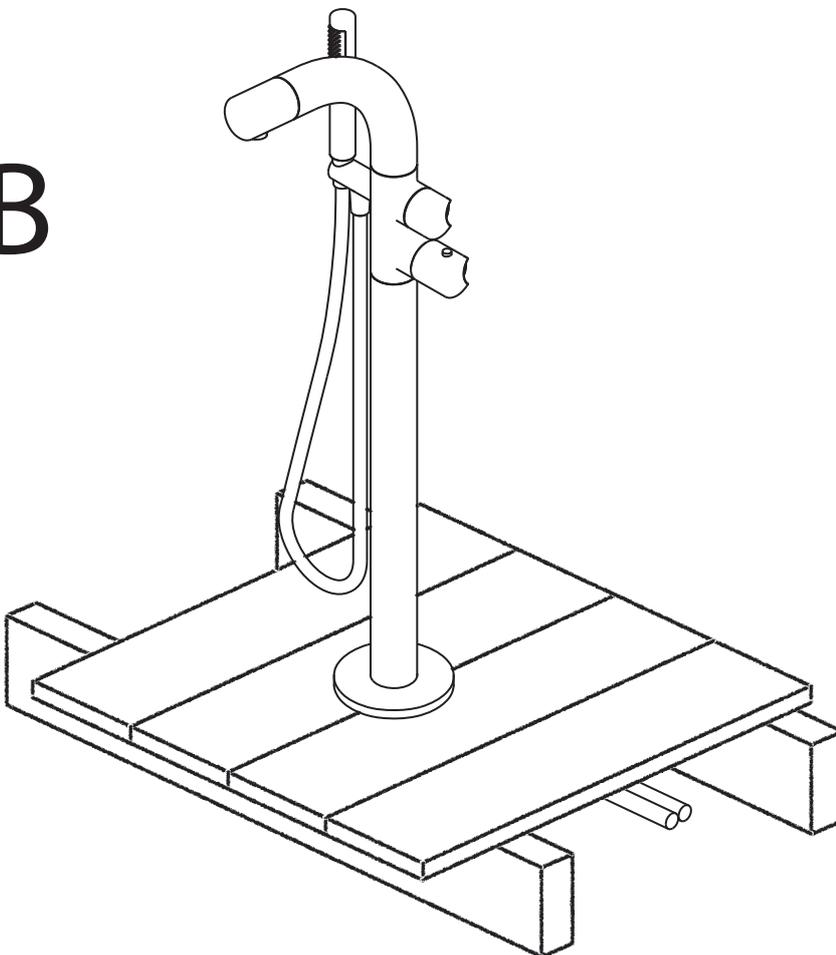


A **B**

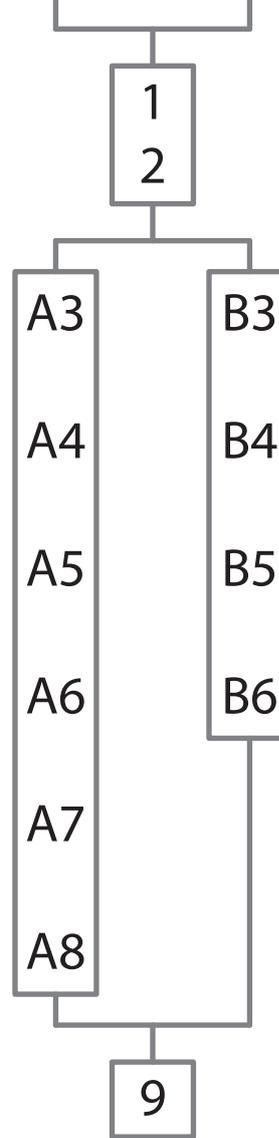


1.

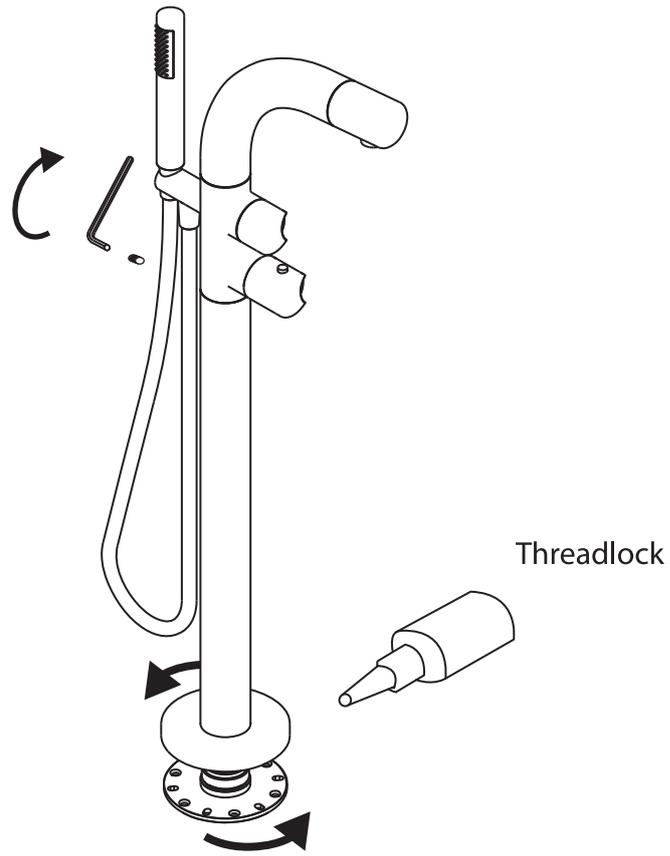

2.

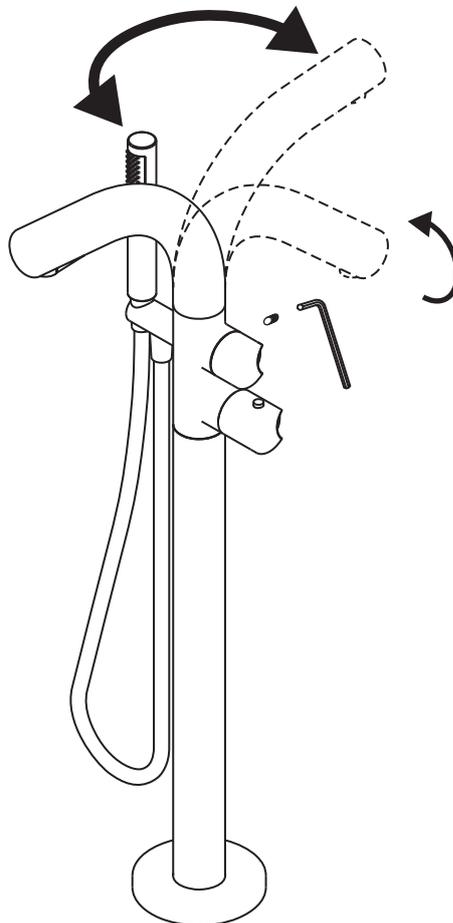

A3.

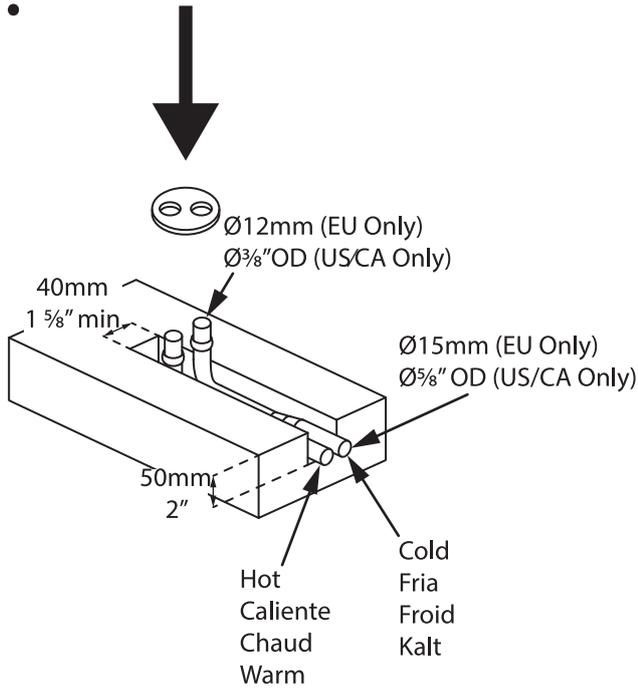


A4.





CHECK
 COMPROBAR
 VERIFER
 ÜBERPRÜFEN




Clean Pipes
 Limpiar Tuberias
 Netoyer La Tuyaterie
 Rohre Sauber Machen

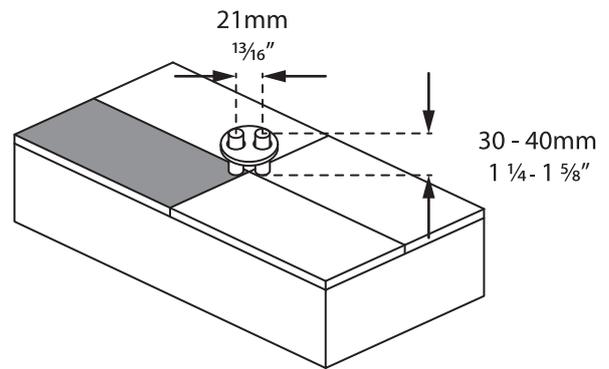


A5.

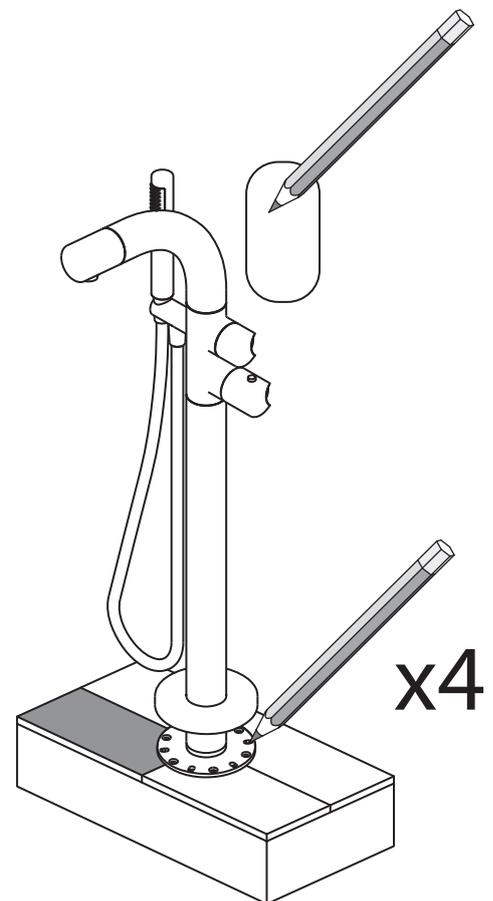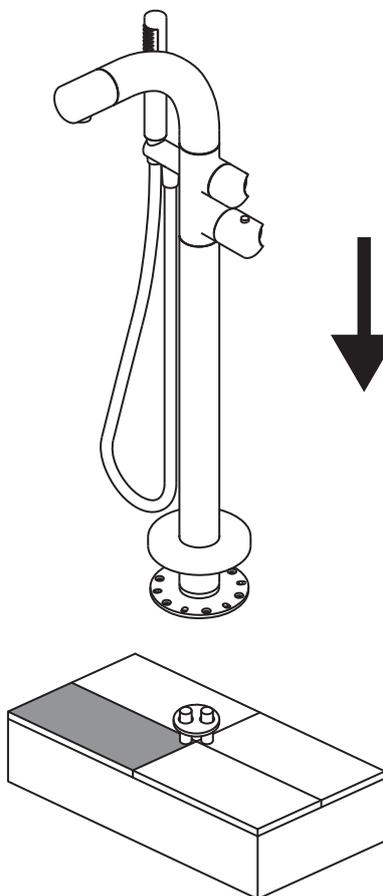


A6.

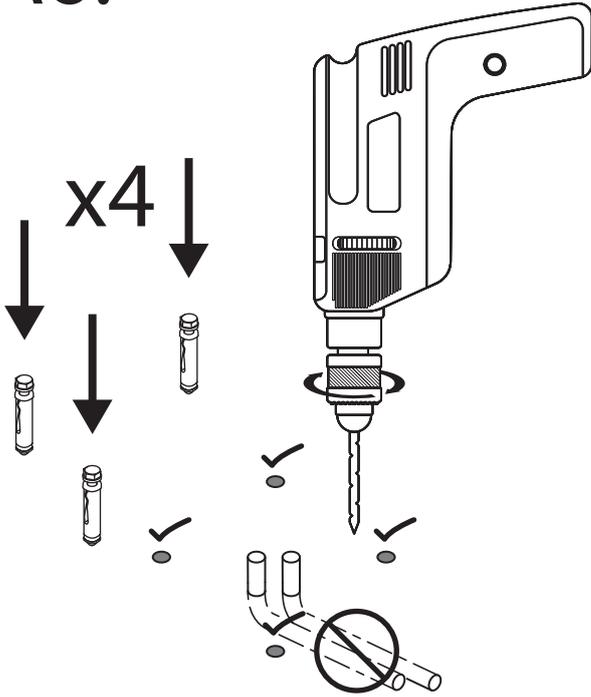


A7.

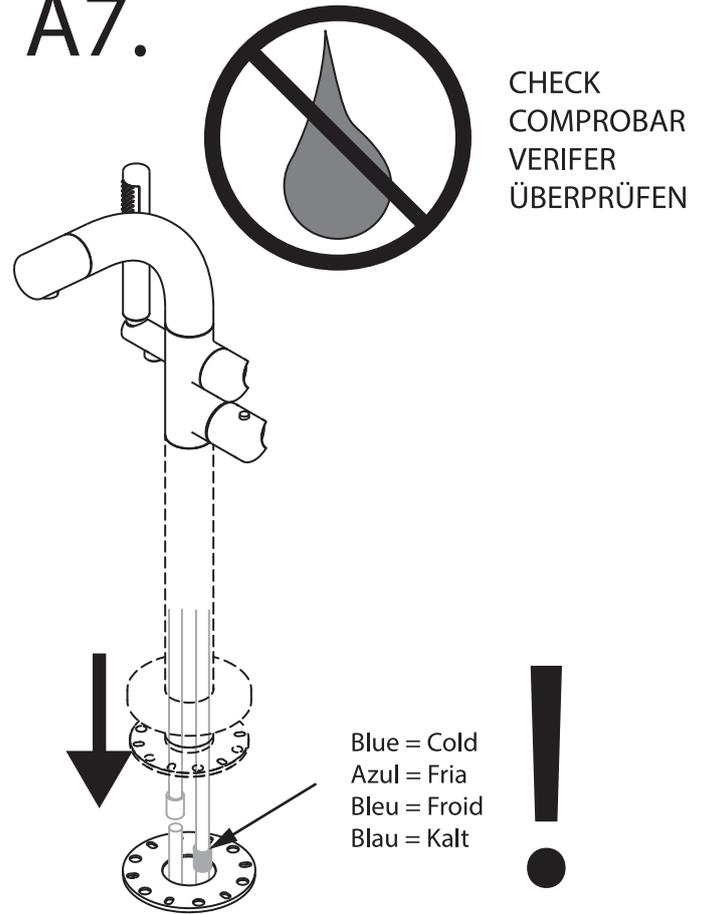


A8.

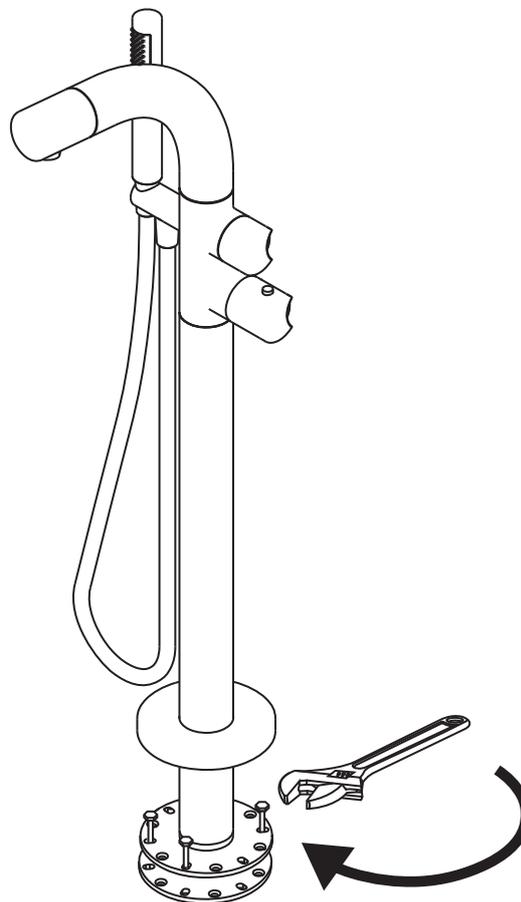

B3.

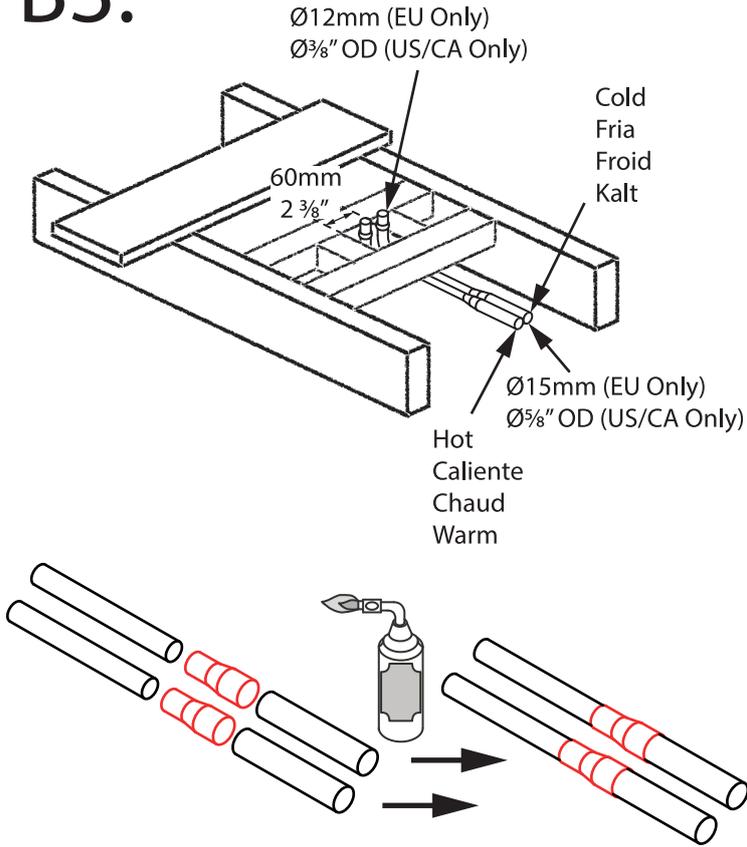


B4.

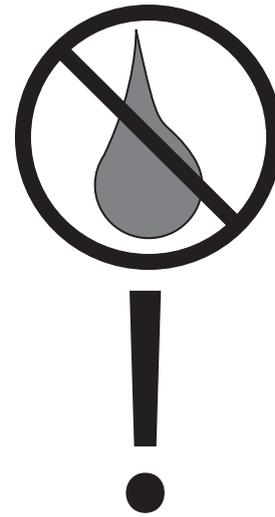

CHECK
COMPROBAR
VERIFER
ÜBERPRÜFEN


Clean Pipes
Limpiar Tuberias
Netoyer La Tuyaterie
Rohre Sauber Machen

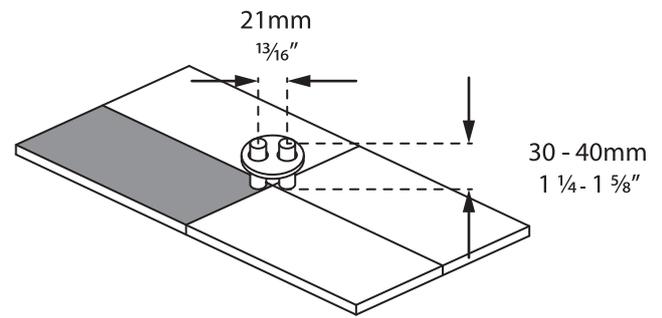

B5.




CHECK
COMPROBAR
VERIFER
ÜBERPRÜFEN

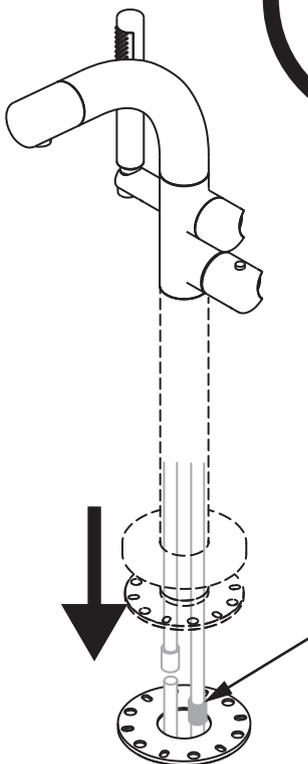

Blue = Cold
Azul = Fria
Bleu = Froid
Blau = Kalt




B6.

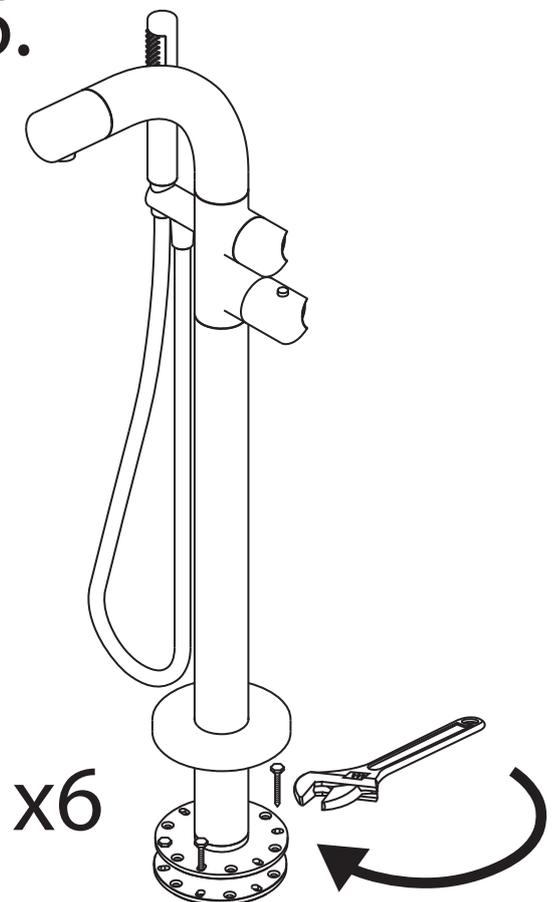




CHECK
COMPROBAR
VERIFER
ÜBERPRÜFEN

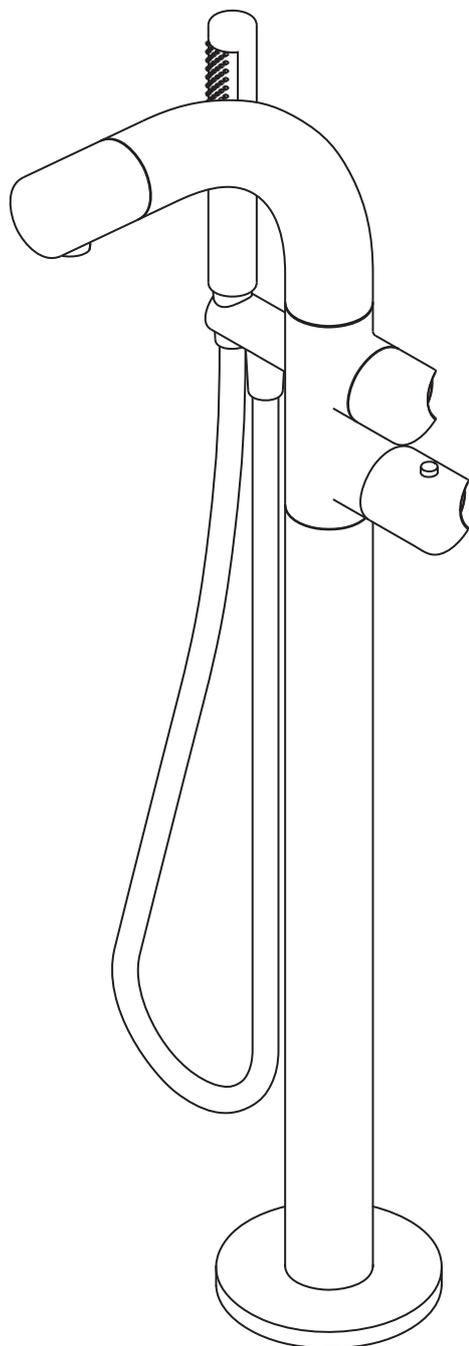

UK/EU




0.5 - 5 Bar

Max 32 L/min @ 3.0 Bar

Max ratio hot to cold = 5:1

US/CA



7.5 - 72.5 psi

Max ratio hot to cold = 5:1

Max 8 gpm @ 45 psi 


Max 6.8 L/min (1.8 gpm) 

For use with shower heads rated at 5.7 L/min (1.5gpm) or higher


Max temperature outlet 120°F

TC1.


Temperature Calibration
(only if required)

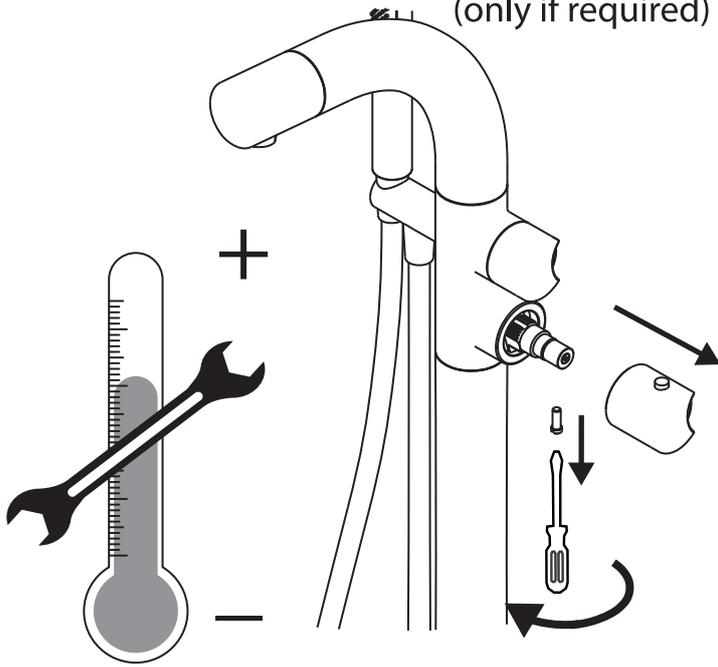

TC2.

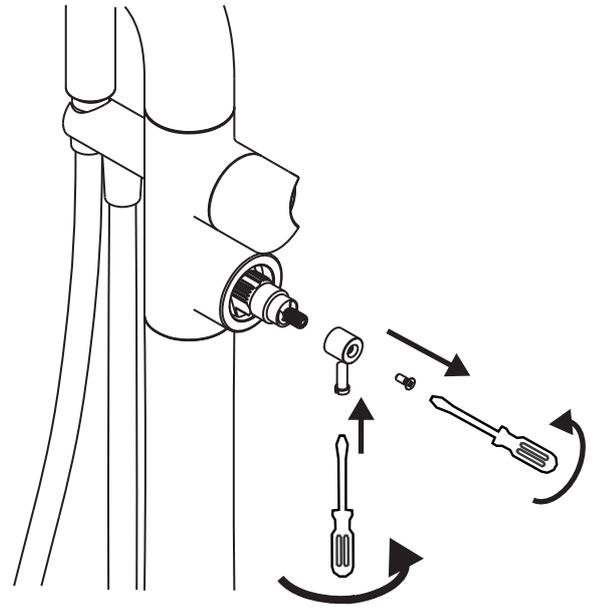


TC3.

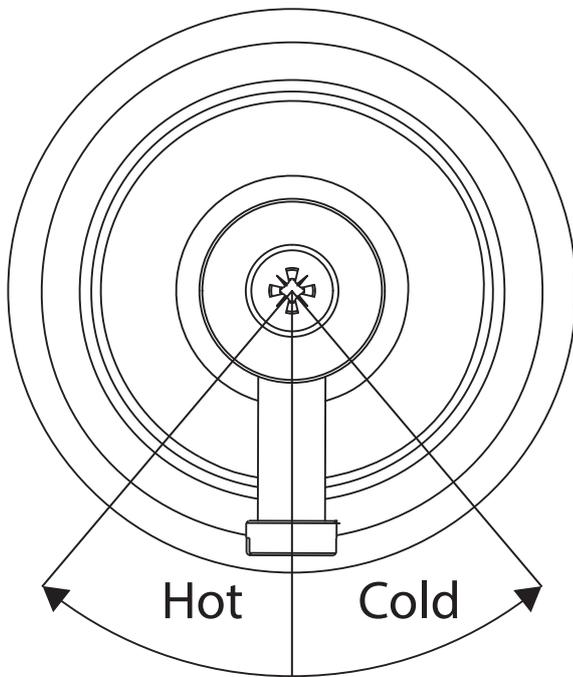


20° = 2°C (4°F)


TC4.

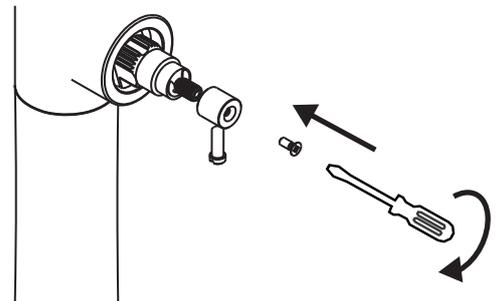

TC5.

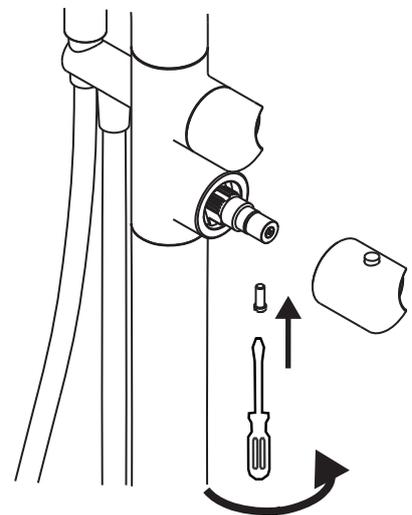

- | | | | |
|--------------------------|-------------------------|--------------------|----------------------------|
| 1. Cartridge Adapter | 11. Base Flange | 21. Handset Holder | 31. Spout |
| 2. Adapter | 12. Flange Cover | 22. Hose | 32. Spout Outlet |
| 3. Temperature Stop Ring | 13. Flexible Tails (x2) | 23. Cartridge Nut | 33. Screw |
| 4. Adapter | 14. Grub Screw | 24. O ring (x4) | 34. Screw |
| 5. Adapter (x2) | 15. Grub Screw | 25. O ring (x4) | 35. Therm Cartridge |
| 6. Aerator | 16. Grub Screw (x2) | 26. O ring | 36. Floor Tube |
| 7. Anchor Bolt (x4) | 17. Grub Screw | 27. O ring | 37. Body |
| 8. Temp Button | 18. Temp Handle | 28. Pipe Clip | 38. Floor Seal |
| 9. Diverter Cartridge | 19. Diverter Handle | 29. Stop Pin | 39. Flow Limiter (US Only) |
| 10. Check Valve (x2) | 20. Handset | 30. Spring | 40. Check Valve (US Only) |

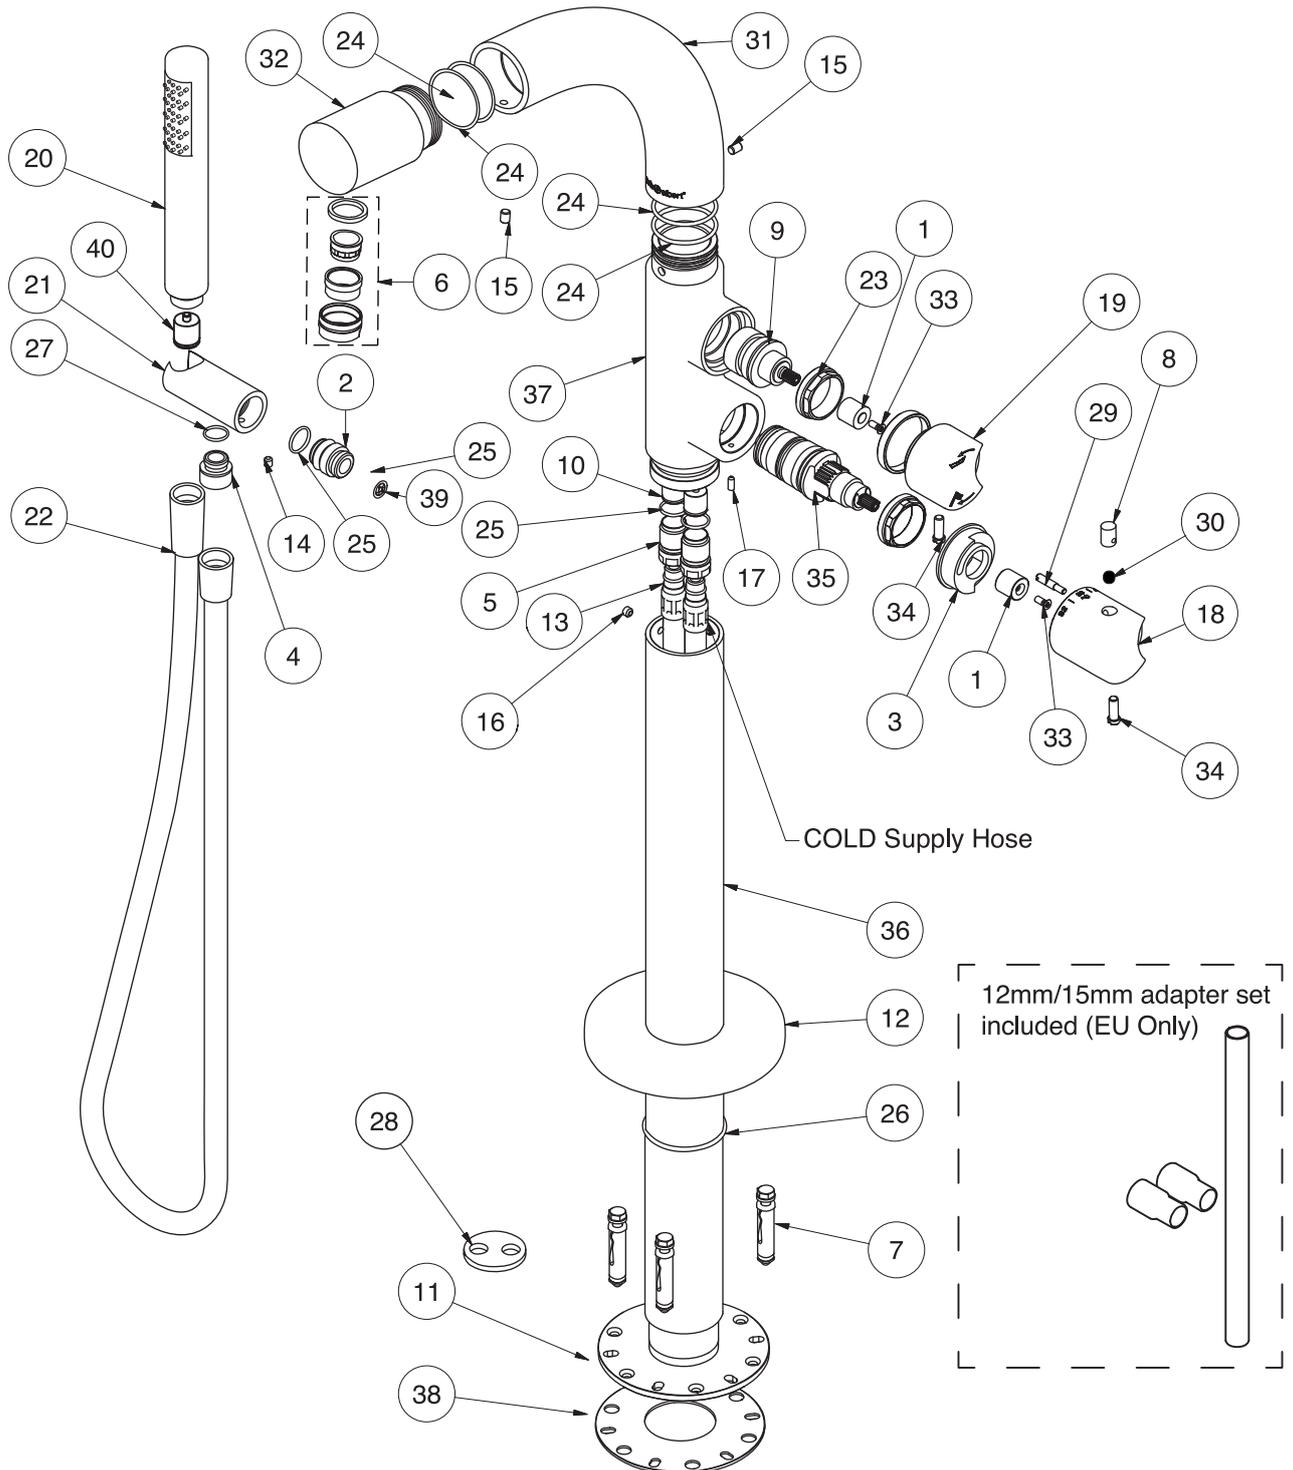

- | | | | |
|---------------------------|-------------------------|--------------------|----------------------------|
| 1. Cartridge Adapter | 11. Base Flange | 21. Handset Holder | 31. Spout |
| 2. Adapter | 12. Flange Cover | 22. Hose | 32. Screw |
| 3. Temperature Stop Ring | 13. Flexible Tails (x2) | 23. Cartridge Nut | 33. Screw |
| 4. Adapter | 14. Grub Screw | 24. O ring (x4) | 34. Therm Cartridge |
| 5. Adapter (x2) | 15. Grub Screw | 25. O ring (x4) | 35. Floor Tube |
| 6. Waterfall Spout Outlet | 16. Grub Screw (x2) | 26. O ring | 36. Body |
| 7. Anchor Bolt (x4) | 17. Grub Screw | 27. O ring | 37. Floor Seal |
| 8. Temp Button | 18. Temp Handle | 28. Pipe Clip | 38. Flow Limiter (US Only) |
| 9. Diverter Cartridge | 19. Diverter Handle | 29. Stop Pin | 39. Check Valve (US Only) |
| 10. Check Valve (x2) | 20. Handset | 30. Spring | |

