



Contemporary 18" Pro-Style for wall mount applications.

Exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; choice of 13 Internal or

External blower options offered separately.

Bright Halogen lighting floods the cooktop and surrounding area for clear visibility.

Mesh lined Hi-Flow™ baffle filters provide superior grease capture to ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

Model Numbers:

WP29M304SB WP29M424SB WP29M544SB
 WP29M364SB WP29M484SB WP29M604SB



Optional non-duct recirculation kit for hoods up to 48" using BEST® single internal blower.



Variable speed control with last setting memory.



Halogen lamps brilliantly illuminate the cooktop.



Hi-Flow™ baffle filters utilize a V-mesh & baffle design to increase airflow, lower sound levels and provide excellent ventilation efficiency.



Hood Sizes

Widths 30", 36", 42", 48", 54", 60"

Depth 24"

Must purchase blower separately.

Finish

Stocked Brushed Stainless Steel—Seamless
 Special Order Not Available

Features

Lighting Type Halogen, GU10, MR16, 50-watt
 Number of Lamps 4 on 30", 36", 42" | 6 on 48", 54", 60"
 Lighting Levels Variable
 Lighting Lamps Included Yes
 Control Type Variable Speed Rotary with Memory
 Control Features Heat Sentry™
 Remote Control Not Available
 Filter Type Hi-Flow™ Baffle Filter
 Non-ducted Capability Yes

Hood Blower Options (Must choose one blower sold separately)


Internal	iQ6	iQ12	P3	P6	P12
Blower CFM	600	1200	300	600	1200
Sones Low/High	0.3/7.5	0.3/10.0	0.3/3.5	2.0/9.5	2.25/12.0
External In-line	ILB3	ILB6	ILB9	ILB11	
Max CFM	280	600	800	1100	
Sone levels are typically half of comparable CFM internal blowers.					
External Exterior	EB6	EB9	EB12	EB15	
Max CFM	600	900	1200	1500	
Sone levels are typically half of comparable CFM internal blowers.					

Accessories

Decorative Soffit Flue AEWP 6" and 12" Tall—in all widths
 Non-Duct Kit for iQ6, P3 and P6 ANKWP306RSB, ANKWP366RSB, ANKWP426RSB, ANKWP486RSB
 Non-Duct Filter AFCROUND2
 Universal MUA Damper MD6TU, MD8TU, MD10TU

Installation Requirements

Amps @ 120V 6.0 Max
 Electrical Connection Direct Wire
 Duct Size: Internal Blower 8" (iQ6, P3, P6) 10" (iQ12, P12)
 Duct Size: External Blower 10" (at hood)
 Duct Direction Vertical and Horizontal
 Backdraft Damper Included with Blower

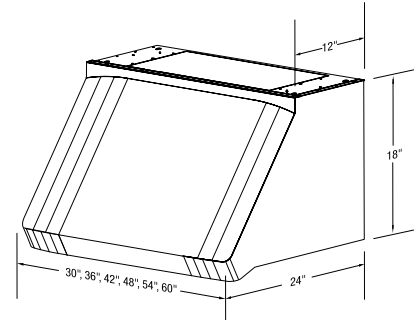


Installation height above the cooking surface: 24"–36"

For more details see the product specifications sheet found at www.BESTRangeHoods.com

AEWP Decorative Soffit Flue

A soffit flue is available in brushed stainless steel, and attaches to the top of the range hood shell. It is available in all hood widths and in 6" or 12" heights.

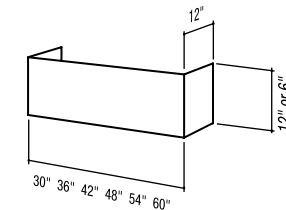

ANKWP Non-Duct Soffit Kit

A non-ducted soffit flue kit is available in hood widths up to 48", in a 6" height.

