


# K34 SERIES RANGE HOODS



Sleek lines and our hand-rolled, seamless-looking construction produces an elegant shape that lends itself to any design setting.

### FEATURES


- Italian design
- Wall mount
- Finishes: 430 Stainless Steel #4 Brushed, White, Black
- Widths: 90cm (35-7/16")
- Telescopic flue accommodates 8-ft. to 9-ft. ceilings
- 6" round duct connector/backdraft damper
- Convertible to duct-free with recirculating filter kit (purchase separately)
- Halogen lighting (2 x 20 watt, Type JC 12V 20W G4 Base - bulbs included)
- Pushbutton control: lights and three speed blower
- Single centrifugal blower
- Dishwasher-safe stainless steel/aluminum filters
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- For indoor use only

### OPTIONS

- Recirculating filter (Model No. FILTER K34)
- Flue Extension for 10-ft. ceiling Model FEXTK34SS (ducted applications), Model FEXTK34SSN (non-ducted applications), 38-in. long stainless steel only.

### SPECIFICATIONS

| VOLTS | AMPS | CFM | SONES | DUCT     |
|-------|------|-----|-------|----------|
| 120   | 3.13 | 500 | 9.5   | 6" round |

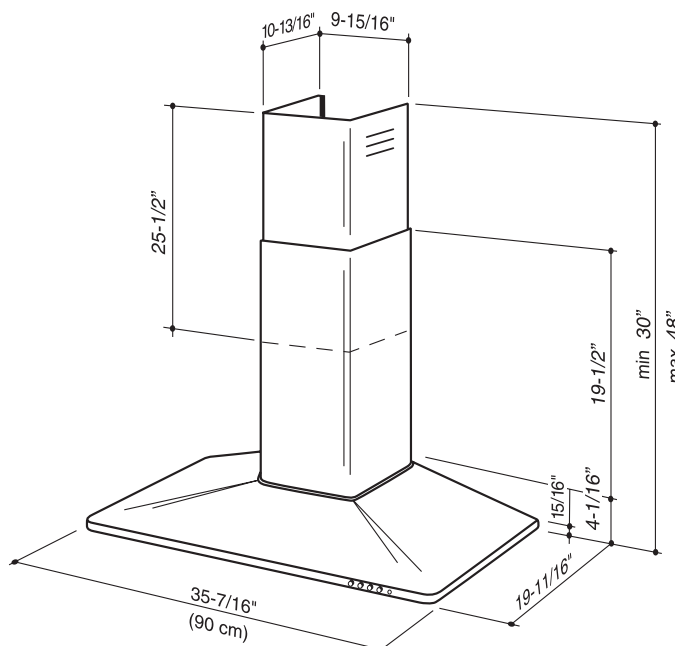


HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


BEST Hartford, Wisconsin [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 800-558-1711  
BEST Drummondville, QC, Canada [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 866-737-7770

| REFERENCE | QTY. | REMARKS | Project           |
|-----------|------|---------|-------------------|
|           |      |         | Location          |
|           |      |         | Architect         |
|           |      |         | Engineer          |
|           |      |         | Contractor        |
|           |      |         | Submitted by Date |

K34 SERIES WIRING

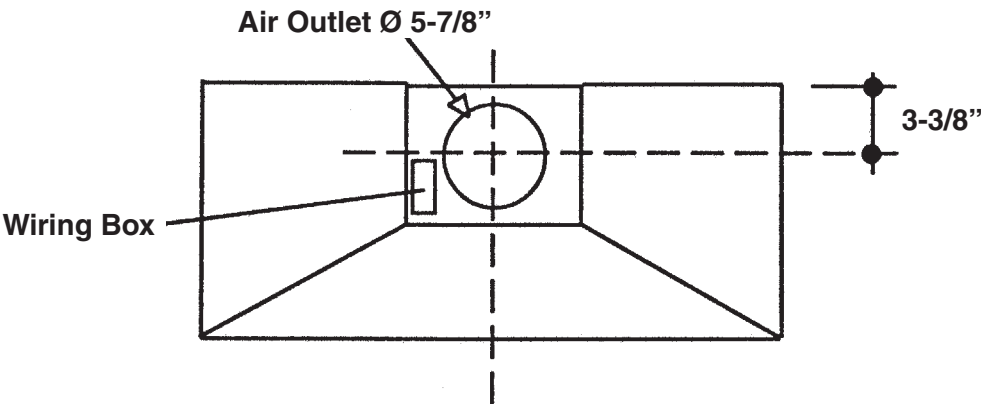

K34 SERIES MOUNTING

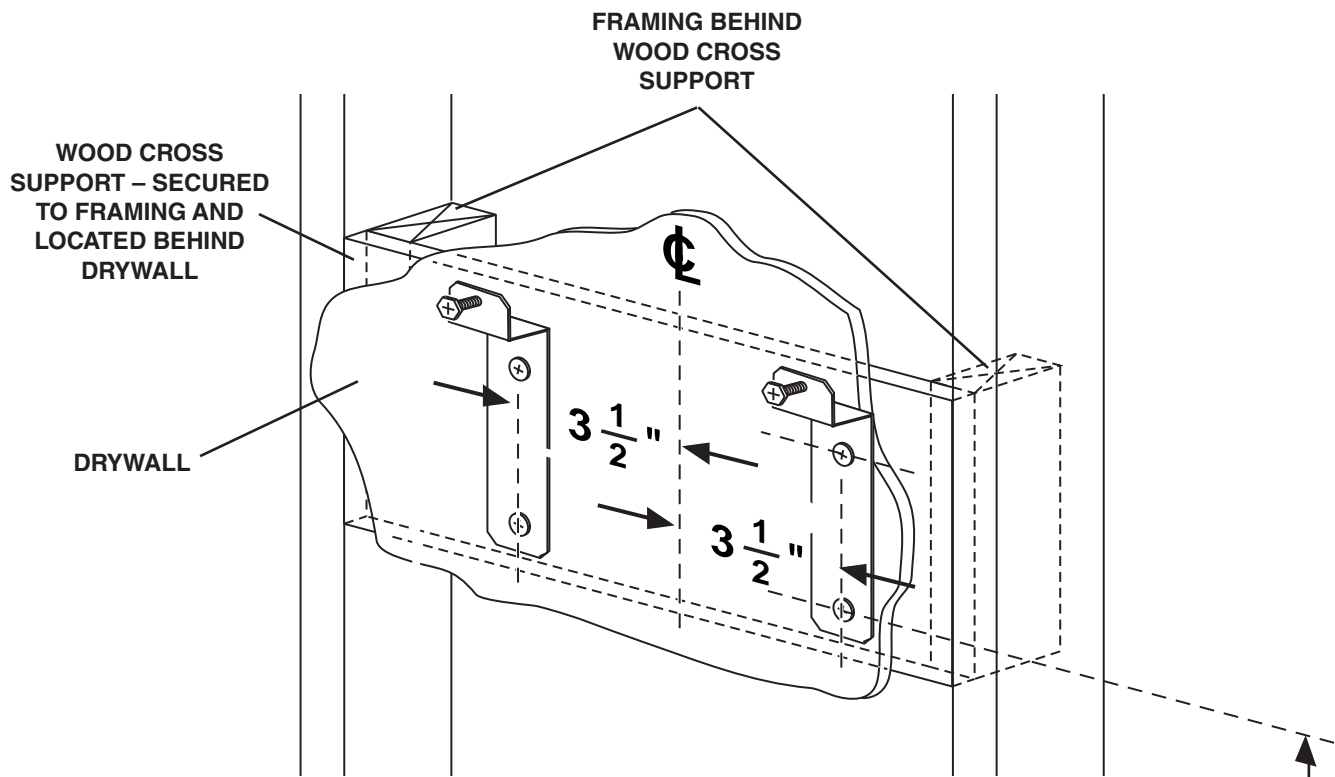

| CEILING HEIGHT   | DUCT METHOD         | MOUNTING DISTANCE ABOVE 36" HIGH COOKTOP (SEE NOTE BELOW) |         |         |         |         |         |         |
|------------------|---------------------|---|---------|---------|---------|---------|---------|---------|
|                  |                     | 24"   | 25"     | 26"     | 27"     | 28"     | 29"     | 30"     |
|                  |                     | MOUNTING BRACKET LOCATION ABOVE 36" HIGH COOK TOP         |         |         |         |         |         |         |
| 8 FEET           | DUCTED              | 36-1/4"   | 37-1/4" | 38-1/4" | 39-1/4" | 40-1/4" | 41-1/4" | 42-1/4" |
|                  | NONDUCTED           | 36-1/4"   | 37-1/4" | 38-1/4" | 39-1/4" |         |         |         |
| 9 FEET           | DUCTED OR NONDUCTED | 36-1/4"   | 37-1/4" | 38-1/4" | 39-1/4" | 40-1/4" | 41-1/4" | 42-1/4" |
| 10 FEET (NOTE 2) | DUCTED OR NONDUCTED | 36-1/4"   | 37-1/4" | 38-1/4" | 39-1/4" | 40-1/4" | 41-1/4" | 42-1/4" |

- Notes:
- 1. Minimum hood distance above cooktop must not be less than 24".  
A maximum of 30" above the cooktop is highly recommended for best capture of cooking impurities.  
Distances over 30" above the cooktop are at the installer's and user's discretion - providing that ceiling height and flue length permit.
  - 2. Requires optional 10-ft. flue extension Model FEXTK34SS (ducted) or FEXTK34SSN (non-ducted). Available in stainless steel only.

