



Heat Sentry™ detects excessive heat and adjusts speed to high automatically.

Ten-minute time-delay shut-off feature and reminder light for filter maintenance.

CFM Reducer Kit for internal blower reduces max CFM to 250–300.

Model Numbers:

K808730SS

KEX808736SS

K808736SS



Translucent touch controls indicate selection.



Quick release stainless steel with aluminum mesh filter is dishwasher safe.



Hood Sizes

Widths	30", 36"
Depth	19-11/16"

Finish

Stocked	Brushed Stainless Steel
Special Order	Not Available

Features

Lighting Type	Halogen, G4-20W
Number of Lamps	2
Lighting Levels	2
Lighting Lamps Included	Yes
Control Type	4-speed Electronic Pushbutton
Control Features	Heat Sentry™, Delay Off, Filter Timer
Remote Control	Not Available
Filter Type	Stainless Steel with Mesh Grease Filter
Non-ducted Capability	Yes

Hood Blower Included (K8087)

Internal	
Blower CFM	450
Sones	9.0

Hood Blower Options (KEX8087 blowers sold separately)


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Sone levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Blower CFM	600	900	1200	1500
Sone levels are typically half of comparable CFM internal blowers.				

Accessories

10' Flue Extension	FEXTK8087SS
Non-ducted Recirculating Kit	NDK7780
CFM Reducer Kit	ARP6

Installation Requirements

Amps @ 120V: Internal Blower	3.2
Amps @ 120V: External Blower	6.5 Max
Electrical: Internal Blower	Plug In
Electrical: External Blower	Direct Wire
Duct Size: Internal Blower	6"
Duct Size: External Blower	8" at hood (Transition to 10" typical, see pages 64–65)
Duct Direction	Vertical
Backdraft Damper	Included

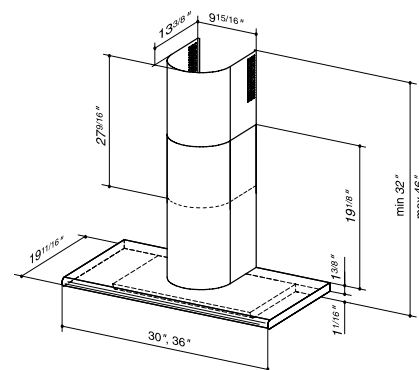

Installation height above the cooking surface:

- 8' ceiling: 24"–29"
- 9' ceiling: 25"–30"
- 10' ceiling: 24"–30"

Telescopic flue for 8'–9' ceiling is standard. Optional flue extensions for 10' ceiling

Reversible telescopic flue allows non-ducted recirculation. (see page 68)

For more details see the product specifications sheet found at www.BESTRangeHoods.com