



Powered by the exclusive iQ Blower System™ with GPS Technology (see page 62) for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood; external blowers offered separately.

Glass and stainless steel intersect, joining together to form a beautiful union.

LED lighting has an extremely long lifespan; lamps may never need replacement.

Quick release, dishwasher-safe, mesh grease filters ensure a clean, fresh kitchen.

Heat Sentry™ detects excessive heat and adjusts blower to high automatically.

Works with optional Universal Make-Up Air Dampers.

#### Model Numbers:

WC45IQ90SB

WC45E90SB



Four-speed IR "touch-free" control senses the finger location to activate the control without actually touching it. Lock-out mode to prevent false operation when cleaning.



LED lighting produces beautiful bright, clean light using minimal energy.



### Hood Sizes

**Width** 35-7/16" (90cm)

**Depth** 17-11/16"

#### Finish

Stocked Brushed Stainless Steel with Glass

Special Order Not Available

#### Features

Lighting Type LED 6-watts

Number of Lamps 2

Lighting Levels 1

Lighting Lamps Included Yes

Control Type 4-speed Electronic "IR" Infrared

Control Features Heat Sentry™, Delay Off, Filter Clean Reminder

Remote Control Not Available

Filter Type Mesh Grease Filter

Non-ducted Capability Yes

### Hood Blower Included (WC45IQ)

Internal	iQ6
Blower CFM	600
Sones Low/High	0.3/7.5

### Hood Blower Options (WC45E blowers sold separately)


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Sone levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500
Sone levels are typically half of comparable CFM internal blowers.				

### Accessories

10'-11' Flue Extension (Ducted)	AEWC345IQSB
10'-11' Flue Extension (Non-ducted)	AEWC345IQSBN
Non-Duct Kit	ANKWC345
Non-Duct Filter	AFCWC345
Universal MUA Damper	MD6TU, MD8TU, MD10TU

### Installation Requirements

Amps @ 120V: Internal Blower	4.0
Amps @ 120V: External Blower	7.0 Max
Electrical Connection	Plug In
Duct Size: Internal Blower	8"
Duct Size: External Blower	8" at hood (Transition to 10" typical, see pages 64-65)
Duct Direction	Vertical
Backdraft Damper	Included

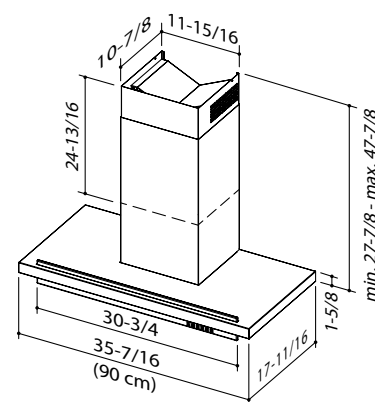

Installation height above the cooking surface: 24"-30"

Telescopic flue for 8'-9' ceiling is standard. Optional flue extensions for 10'-11' ceiling

Reversible telescopic flue allows non-ducted recirculation. (see page 68)

For more details see the product specifications sheet found at [www.BESTRangeHoods.com](http://www.BESTRangeHoods.com)