



Retractable design for professional-style performance.
Chimney raises over 9-1/2" at the touch of a button.
Heat Sentry™ detects excessive heat and adjusts speed to high automatically.


10-minute time-delay shut-off feature and reminder light for filter maintenance.
Remote control included to activate Downdraft from another location.

CFM Reducer Kit for internal blower reduces max CFM to 250–300.

Works with optional Universal Make-Up Air Dampers.

Model Numbers:

DD0130SS	DD0136SS	DD0148SS
DDEX30SS	DDEX36SS	DDEX48SS



Remote control switch included.



Stylish touch-button control provides 3-speed, operation. Attractive polished stainless steel with aluminum mesh filters are dishwasher-safe.



Hood Sizes

Widths	30", 36", 48"
Depth	7"

Finish

Stocked	Brushed Stainless Steel—Seamless
Special Order	Not Available

Features (Lighting Not Available)

Control Type	3-speed Electronic Pushbutton
Control Features	Heat Sentry™, Delay Off, Filter Timer
Remote Control	Included
Filter Type	Stainless Steel with Mesh Grease Filter
Non-ducted Capability	No

Hood Blower Included (DD01)

Internal	
Blower CFM	500
Sones	Varies with Installation

Hood Blower Options (DDEX blowers sold separately)


External In-line	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
Sone levels are typically half of comparable CFM internal blowers.				
External Exterior	EB6	EB9	EB12	EB15
Blower CFM	600	900	1200	1500
Sone levels are typically half of comparable CFM internal blowers.				

Accessories

Non-ducted Recirculating Kit	Not Available
Universal MUA Damper	MD6TU, MD8TU, MD10TU
CFM Reducer Kit	ARP310

Installation Requirements

Amps @ 120V: Internal Blower	6.0 Max
Electrical	Plug In
Duct Size: Internal Blower	3-1/4" x 10"
Duct Size: External Blower	3-1/4" x 14" at hood (Transition to 10" typical, see pages 64–65)
Duct Direction	Left, Right or Down
Backdraft Damper	DD01 Not Included DDEX Refer to Blower

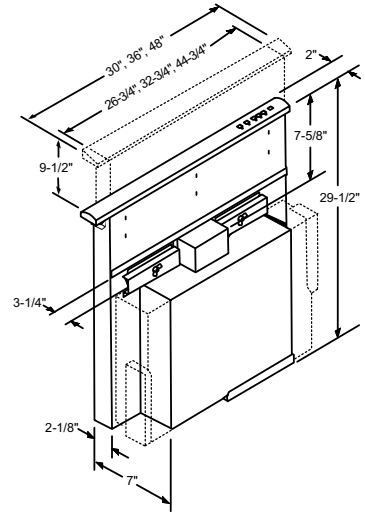

Exhaust flexibility allows blower connections to be ducted left, right or downward. DD01 requires 3-1/4" x 10" duct. DDEX requires 3-1/4" x 14" duct.

The DD01 raises over 9-1/2" from its concealed housing compartment.

