



Single Hung | **Horizontal Slider** | **Double Hung**



Product Material Aluminum



Frame Depth 2 ³/8"



Double/Single Hung: C50 **Horizontal Slider:**

CW40 **CW50**



	-
Design Pressure Hung: 50 Horiz. Slider: 40 Fixed: 50	U-Value* Hung: .3864 Horiz. Slider: .3768 Fixed: .2751
Air Infiltration Hung: <.30 Horiz. Slider: <.30 Fixed: <.10	SHGC* Hung: .1460 Horiz. Slider: .1261 Fixed: .1368
Water Resistance Hung: 7.5 Horiz. Slider: 6.0 Fixed: 7.5	* CR* Hung: 34 - 39 Horiz. Slider: 28 - 39 Fixed: 33 - 54
OITC ^X Hung: Contact Quaker Horiz. Slider: 35 - 39 Fixed: Contact Quaker	STC ^X Hung: Contact Quaker Horiz. Slider: 47 - 51 Fixed: Contact Quaker
*-Ranges based on multiple Low-E/Argon I.G. combinations	

x-Ranges based on multiple I.G. combinations

FEATURES:

- Architectural grade aluminum frame
- Thermally-broken frame and sash with pourand-debridge technology
- ▶ ¾" insulating glass in Operating models
- ▶ 1" insulating glass in Fixed model
- ▶ Swivel cam locks, block & tackle balancers and full-length lift rail on Hung models
- ► Swivel cam locks, brass rollers and full-length pull rail on Horizontal Sliding models
- ▶ End Vent and Center Vent Sliding models available
- ▶ 30+ "Quick-Pick" colors, with unlimited custom colors available
- Standard High-Performance 2604 Powder Paint Finish (an FGIA Specification)
- Optional Upgrade to 2605 Powder Paint Finish (an FGIA Specification)
- Extruded aluminum screen
- With or without integral nail fin






K200 Series Hung (CW50)


Shown with integral nailing fin

Shown without integral nailing fin

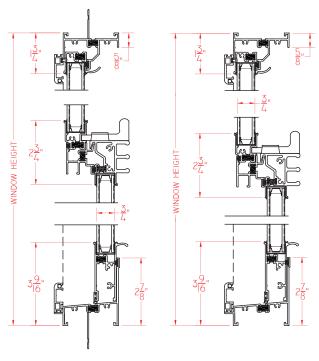


K200 Series Fixed (CW50)

Shown with integral nailing fin Shown without integral nailing fin



All ratings listed are NAFS certified.

K200 Series Horizontal Slider (CW50)

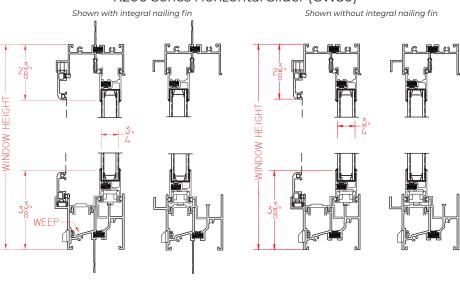



QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com