

Single Hung | Horizontal Slider | Fixed





Frame Depth 2 3/4"



Rating Single Hung: R40 Horizontal Slider: R40 Fixed: R40



Design Pressure Single Hung: 40 Horizontal Slider: 40 Fixed: 40	U-Value* Single Hung: .2840 Horizontal Slider: .2838 Fixed: .2739
Air Infiltration Single Hung: <.30 Horizontal Slider: <.30 Fixed: <.10	SHGC* Single Hung: .1834 Horizontal Slider: .1935 Fixed: .1535
Water Resistance Single Hung: 6 Horizontal Slider: 6 Fixed: 6	* CR* Single Hung: 49 - 60 Horizontal Slider: 49 - 61 Fixed: 50 - 61
OITC)))) Single Hung: contact Quaker Horizontal Slider: contact Quaker Fixed: contact Quaker	STC))) Single Hung: contact Quaker Horizontal Slider: contact Quaker Fixed: contact Quaker

*-Ranges based on multiple Low-E/Argon I.G. combinations

FEATURES:

- Cost-conscious alternative for light commercial projects
- ► High-grade uPVC vinyl
- ► Fusion welded sash and frame corners
- ► Integral Nail Fin
- ▶ 3/4" Insulating Glass
- ► Clean exterior appearance
- Cam locking systems on Hung and Sliding models
- ► Block & Tackle balancers (Single Hung model)
- Brass rollers with stainless steel axle pins (Sliding model)
- ► C-mull and ½" structural mull
- White (exterior) with White (interior), Sandstone (exterior) with Sandstone (interior), or Textured Black (exterior) with White (interior)
- ► Matching Sliding Door



V150 COMMERCIAL VINYL SERIES

Single Hung (R40)


test size = 40" x 63"


Horizontal Slider (R40)


test size = 63" x 44"

Fixed (R40)

test size = 60" x 60"

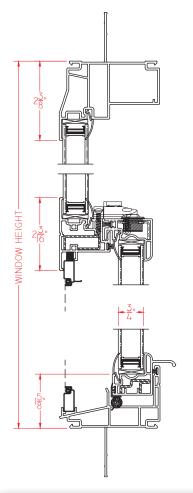

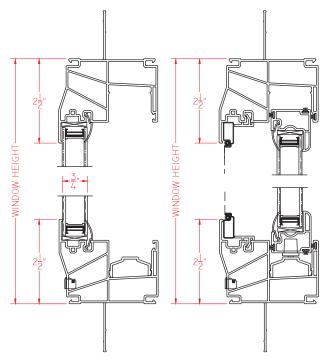

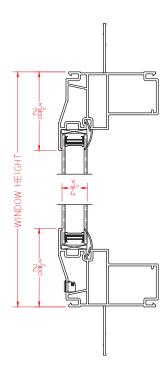

All ratings listed are NAFS certified.





QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com