



# V300

COMMERCIAL uPVC VINYL SERIES

Swing Door | Fixed



Product Material  
uPVC Vinyl



Frame Depth  
3 1/4"



Rating  
Inswing: CW50\*  
Outswing: CW50\*  
Fixed: CW50\*

Danbury on 5th  
Columbus, OH  
Developer: Danbury Senior Living  
Contractor: The Daimler Group  
Dealer: Northern Window & Doors Ltd.



|                                                                                                                                                                                                                                 |                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>Design Pressure</b><br>Inswing: up to 50<br>Outswing: up to 50<br>Fixed: 50                                                              |  <b>U-Value#</b><br>Inswing: .21 - 0.30<br>Outswing: .21 - 0.30<br>Fixed: |
|  <b>Air Infiltration</b><br>Inswing: <.30<br>Outswing: <.30<br>Fixed: <.30                                                                   |  <b>SHGC#</b><br>Inswing: .09 - .24<br>Outswing: .09 - .24<br>Fixed:      |
|  <b>Water Resistance</b><br>Inswing: 7.5<br>Outswing: 7.5<br>Fixed: Up to 7.5                                                                |  <b>CRF#</b><br>Inswing: 46-65<br>Outswing: 45-64#<br>Fixed:              |
|  <b>OITC*</b><br>Inswing:<br>Outswing:<br>Fixed:                                                                                             |  <b>STC*</b><br>Inswing:<br>Outswing:<br>Fixed:                           |
| #- U-Value and SHGC ranges are NFRC certified based on I.G. combinations incorporating some or all the following: Low-E glass, clear glass, argon gas and/or air fill, and grids<br>*-Contact Quaker for STC & OITC information |                                                                                                                                                              |

## FEATURES:

- ▶ Extruded, architectural grade uPVC vinyl frame
- ▶ 1" insulating glass
- ▶ Inswing or Outswing single-panel operation
- ▶ Standard Widths: 2<sup>8</sup>, 3<sup>0</sup>, 3<sup>2</sup>
- ▶ Standard heights: 6<sup>8</sup>, 6<sup>10</sup>, 8<sup>0</sup>
- ▶ Max sizing: 48" x 96"
- ▶ Minimum sizing: 32" x 72"
- ▶ 2 5/8" threshold. Optional ADA threshold w/10" bottom rail
- ▶ Multi-point WHS hardware
- ▶ Butt hinges - 3 axis adjustability
- ▶ Keyed hardware option
- ▶ White or Sandstone uPVC vinyl
- ▶ Optional painted exterior (meets FGIA 615 finish)
- ▶ Textured laminate options for exterior and interior
- ▶ Fixed Transom and Sidelite

[www.QuakerCommercialWindows.com](http://www.QuakerCommercialWindows.com)

Information listed is deemed accurate as of date shown. Quaker Windows reserves the right to change or discontinue any product, feature or option without notice.


March, 2025 V5




# V300

COMMERCIAL UPVC VINYL SERIES


Outswing  
w/standard sill

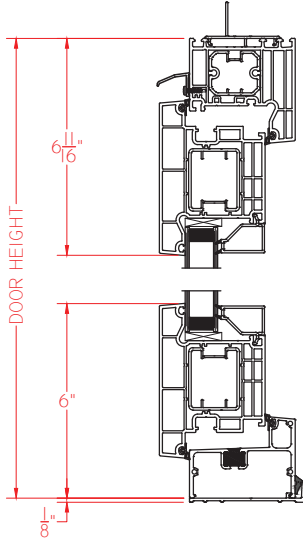


Outswing  
w/ADA sill

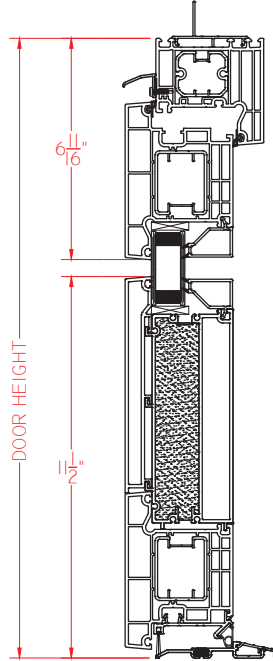


Inswing  
w/standard sill

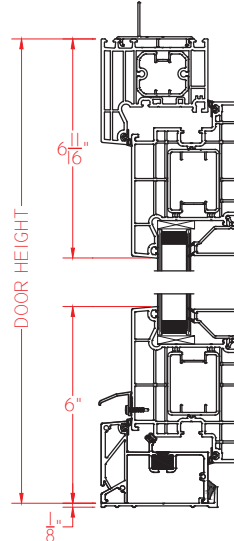


Inswing  
w/ADA sill

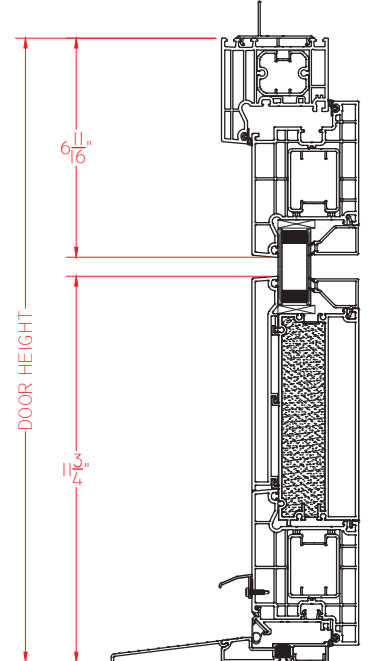

Outswing Models  
(horizontal cross section)

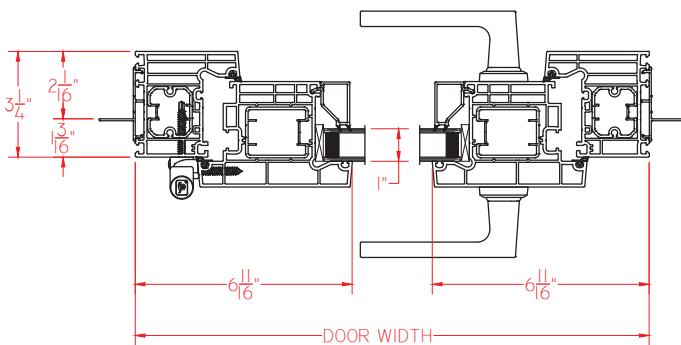

Inswing Models  
(horizontal cross section)

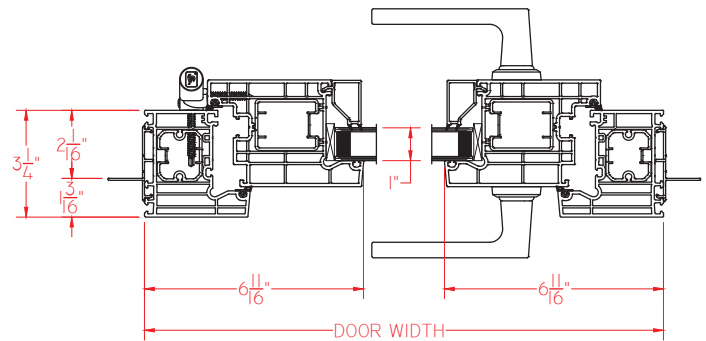

QuakerCommercialWindows.com  
1-800-347-0438  
Commercial@quakerwindows.com