

## V300 COMMERCIAL UPVC VINYL SERIES

## Single Hung | Horizontal Slider | Fixed







**FEATURES:** 

1" insulating glass

Continuous frame capabilities

balancers (up to 100 lb. sash)

Rating
Single Hung: CW50
Slider: CW50
Fixed: CW50



Design Pressure Single Hung: up to 50 Slider: 50 Fixed: 50	U-Value* Single Hung: .2046 Slider: .2046 Fixed: .1543
Air Infiltration Single Hung: <.30 Slider: <.30 Fixed: <.10	SHGC* Single Hung: .1060 Slider: .1060 Fixed: .1059
Water Resistance Single Hung: 7.5 Slider: Up to 7.52 Fixed: Up to 7.52	* CRF* Single Hung: 33 - 66 Slider: 33 - 66 Fixed: 33 - 70
Single Hung: 7.5 Slider: Up to 7.52	Single Hung: 33 - 66 Slider: 33 - 66

## White uPVC vinylOptional painted exterior (meets FGIA 615 finish)

Side load single hung with Class 5 Block & Tackle

► Extruded, architectural grade uPVC vinyl frame


- Textured laminate options for exterior and interior
- Use up to 8 floors with nail fin, up to 11 floors with receptor/subsill system


 $<sup>^*\</sup>mbox{-}$  U-Value, SHGC & CRF ranges are NFRC certified based on I.G. combinations incorporating some or all the following: Low-E glass, clear glass, argon gas and/or air fill, and grids


x- Ranges based on multiple I.G. combinations



## V300 COMMERCIAL UPVC VINYL SERIES



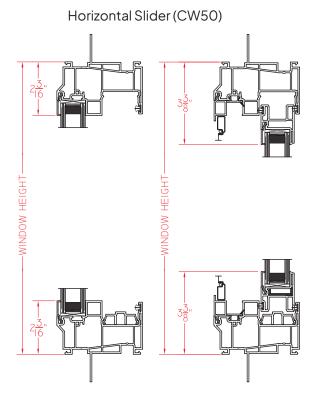

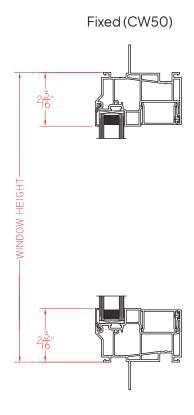





QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com