


Specialty Pumps

DISCHARGE	:						
	SF Series	2" NPT, Female, Vertical, Bolt-on Flange					
		3" NPT, Female, Vertical, Bolt-on Flange					
LIQUID TEMI		104°F (40°C) Continuous					
		Cast Iron ASTM A-48, Class 30					
		Cast Iron ASTM A-48, Class 30					
		Cast Iron ASTM A-48, Class 30					
		2 Vane open, with pump out vanes on back					
IIWIFELLER.	Design	side. Dynamically balanced, ISO G6.3					
	Matarial	Cast Iron ASTM A-48. Class 30					
CHAFT							
		416 Stainless Steel					
	IGS						
		300 Series Stainless Steel					
		•					
SEAL:	•	Single Mechanical					
	Material	Silicon/Silicon/Buna-N					
		Hardware -300 Series Stainless					
CORD ENTR	Y	15 ft. (5m) Cord with plug on 120 Volt					
		Quick Connect, Custom Molded for sealing					
		and strain relief					
UPPER BEA	RING	Single Row, Ball, Oil Lubricated					
LOWER BEA	RING	Single Row, Ball, Oil Lubricated					
MOTOR:	Design	NEMA L Torque curve, Oil Filled, Squirrel cage					
		Induction					
	Insulation	Class B					
		Class F on selected models					
SINGLE PHASE		Permanent Split Capacitor (PSC).					
		Includes thermal overload protection in motor					
OPTIONAL EQUIPMENT		Seal Material. Additional cord and					
	-, -	Impeller trims					




Series: SF - .5HP, 1750RPM, 60Hz 3SF-L - 1HP, 1750RPM, 60Hz

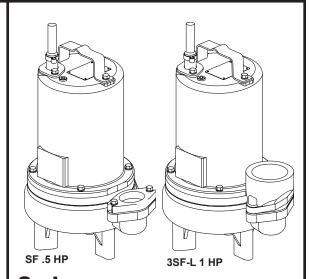

DESCRIPTION:

THESE PUMP ARE SPECIALLY DESIGNED FOR USE IN DRAMATIC, DECORATIVE WATER DISPLAYS

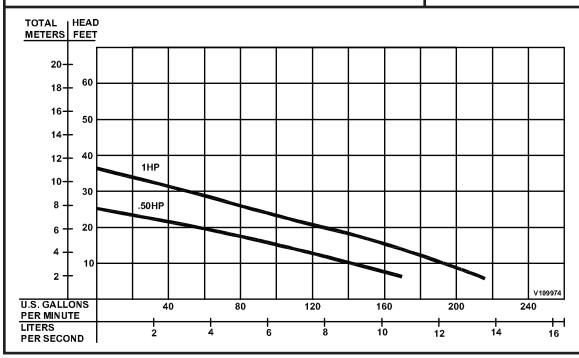

Testing is performed with water specific gravity of 1.0 @ 68°F (20°C), other fluids may vary performance

CRANE


A Crane Co. Company


PUMPS & SYSTEMS

SECTION F PAGE 15 DATE 11/15



Specialty Pumps

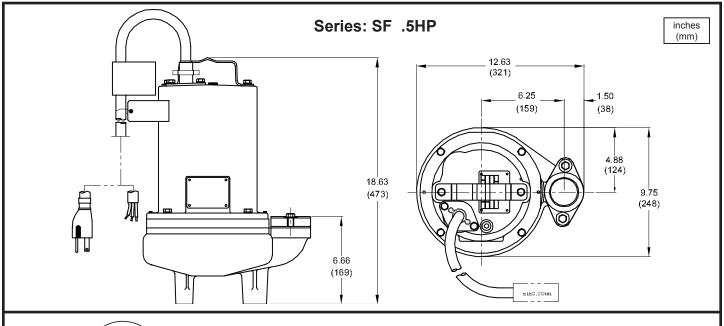

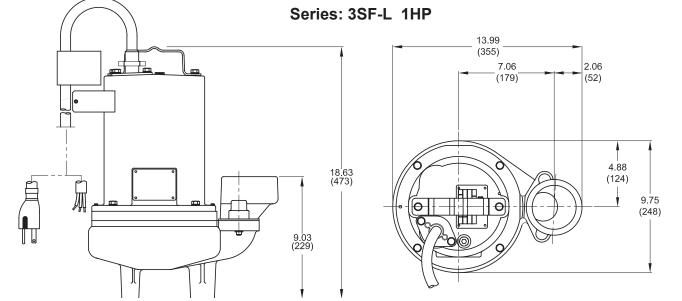

MODEL NO	PART NO	HP	VOLT/PH	Hz	RPM (Nom)	NEMA START CODE	INSUL. CLASS	FULL LOAD AMPS	LOCKED ROTOR AMPS	CORD SIZE	CORD TYPE	CORD O.D. inch (mm)
SF51	109974	0.5	120/1	60	1750	F	В	11.6	21.3	14/3	SJTOW	0.375 (9.5)
3SF1074L	109975	1.0	200-240/1	60	1750	D/G	F	8.8/8.3	21.5/25.8	14/3	SOW	0.530 (13.5)

IMPORTANT!

- 1.) DO NOT USE TO PUMP FLAMMABLE LIQUIDS.
- 2.) INSTALLATIONS SUCH AS DECORATIVE FOUNTAINS OR WATER FEATURES PROVIDED FOR VISUAL ENJOYMENT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE ANSI/NFPA 70 AND/OR THE AUTHORITY HAVING JURISDICTION. THIS PUMP IS NOT INTENDED FOR USE IN SWIMMING POOLS, RECREATIONAL WATER PARKS, OR INSTALLATIONS IN WHICH HUMAN CONTACT WITH PUMPED MEDIA IS A COMMON OCCURRENCE.

SECTION F PAGE 16 DATE 11/15

