

Specifications:

CORD: Material 14-2 SJOW, 41 Strand x #30, 90°C Dry, 60°C Wet
Size37 (8mm) Dia. x (See Chart for Length)

HOUSING: Material Polypropylene
Color..... Normally Open - Black

CLAMP Pipe Mounted, Stainless Steel with Polypropylene Saddle, 1" (25) to 3" (76)

TEMPERATURE RATING 200°F (93°C)

SWITCH Mechanical, Snap Action

SWITCH RATING 15 Amps @ 115 Volts AC, 1 Phase
15 Amps @ 230 Volts AC, 1 Phase

Description:


Part Number 090269 and 090270 Level Controls are available in Pipe Mounted Configuration with a 115 volt molded on Male and Female Piggy-Back Plug w/Ground on the 090269 and a 230 volt molded on plug on 090270. Cable lengths are of 15 (5M), 25 (8M), 30 (9M) and 50 feet (15M).

The unit has a piggy-back plug attached to the cord, allowing the user to plug the pump plug directly into it, and then plug the entire unit into a 115 volt or 230 volt grounded outlet. The Wide Angle Level Control is furnished with an adjustable strap for mounting to the pump discharge pipe. Standard units are preset at the factory, but can easily be adjusted to various pump down cycles by shortening or lengthening the cord length at the pivot point.

The Mechanical level control is a direct acting switch, it uses a metal cylinder sliding back and forth in a tube to actuate a snap-action switch.


PART NUMBER	CORD LENGTH	TYPE INSTALLATION	CONTACTS
090269	15 ft. (5m), 25 (8m), 30 (9m) & 50 ft. (15m)	Pipe Mounted 115 Volt	Open
090270	15 ft. (5m), 25 (8m), 30 (9m) & 50 ft. (15m)	Pipe Mounted 230 Volt	Open

STATE CORD LENGTH AT TIME OF ORDERING.

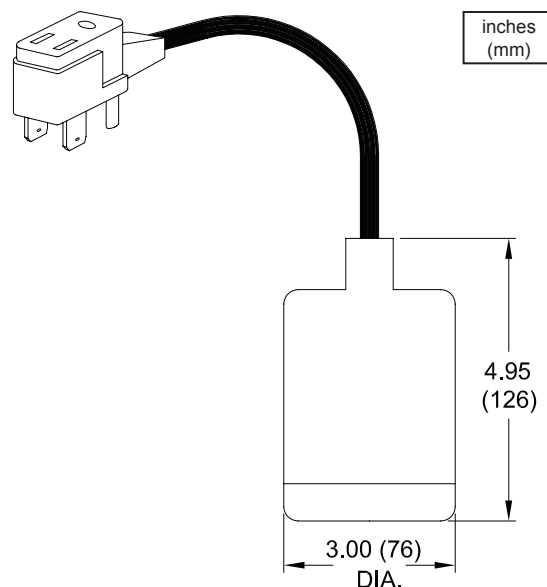

115 Volt

P/N: 090269

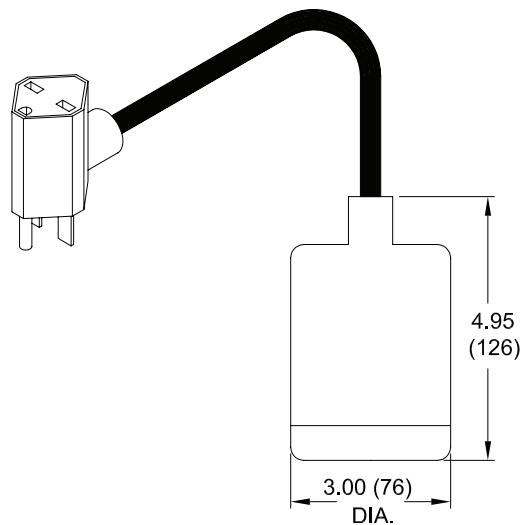

230 Volt

P/N: 090270

