

Ultra Nator™ System


Designed to control two 120V single phase pumps using two receptacles for easy pump connections in indoor duplex pump applications. No wiring needed.

This Ultra Nator™ control and alarm system provides a convenient location for all wiring required for an indoor duplex pump application. The Ultra Nator™ employs two receptacles to accept two 120 VAC pump plugs.

In normal operation pumps will alternate based on the pump switch level. If an alarm condition occurs (top float activates), the alarm light and horn turn on. The pump in use will turn off and the other pump will turn on. Pumping will continue until the pump switch deactivates (bottom float).

FEATURES

- n** 120AC Voltage - Primary: 120 VAC, 60Hz; Secondary: 9 VDC
- n** If primary power fails, the alarm system continues to work due to battery backup feature. Battery Backup Power - 9VDC (Battery not included) (Battery backup will not run pumps)
- n** Pump failure indicator, alerts of potential pump problems. **n**
- NEMA 1 rated for indoor use.
- n** Alternating pump action equalizes pump wear.
- n** Factory-installed 10ft power cord.
- n** Factory-installed pump activation and alarm activation switches for easy installations. (Various switch configurations available).
- n** Red LED high water indicator.
- n** Amber LED horn disabled indicator.
- n** Green LED pump run indicators (pump 1 & pump 2).
- n** Green LED power on indicator.
- n** Audible and visual high water alarm.
- n** Entire system is UL and cUL Listed to meet and/or exceed industry safety standards.
- n** Alarm test press button switch.
- n** Pump Run press button switch.
- n** Horn Silence press button switch.
- n** Test-Reset press button switch.
- n** Auxiliary Contacts (normally open and normally closed).
- n** Five-year limited warranty.

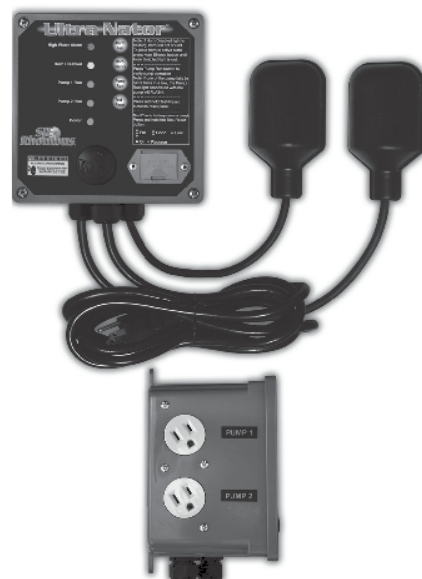

Shown with SJE MicroMaster® pump switches

SPECIFICATIONS


VOLTAGE: 120 VAC

AUXILIARY CONTACT RATING: 4amp

ENCLOSURE: 6 x 6 x 4 inch (15.24 x 15.24 x 10.16 cm),
NEMA 1 thermoplastic

RECEPTACLES: 120 VAC NEMA
type 5-15

ALARM HORN: 95 decibels at 2 feet
(0.61 meters)

MAXIMUM CURRENT: 15 amps 

SJE Rhombus

PO Box 1708, Detroit Lakes, MN 56502
1-888-DIAL-SJE • 1-218-847-1317
1-218-847-4617 Fax

email: customer.service@sjerhombus.com

www.sjerhombus.com B.69

SEE BACK FOR ORDERING INFORMATION.
SEE PRICE BOOK FOR LIST PRICE.

Ultra Nator™ System

Designed to control two 120V single phase pumps using two receptacles for easy pump connections in indoor duplex pump applications. No wiring needed.

| 120 VAC Part # | Description | Shipping Weight |
|-------------------|---|-----------------|
| 1029624 | Ultra Nator™ & two 10 foot SJE MicroMasters® | 13 lbs. |
| 1030108 | Ultra Nator™ & two 10 foot SJE VerticalMaster® II | 13 lbs. |
| 1030109 | Ultra Nator™ & one 10 foot SJE VerticalMaster® II & one 10 foot VRS | 13 lbs. |
| 1031346 | Ultra Nator™ & two 20 foot SJE MicroMasters® | 15 lbs. |
| 1032893 | Ultra Nator™ & two 20 foot SJE VerticalMaster® II | 15 lbs. |

SEE PRICE BOOK FOR LIST PRICE.



SPECIFICATIONS

VOLTAGE: 120 VAC

OUTPUT CONTACT RATING: 4amp

ENCLOSURE: 6 x 6 x 4 inch (15.24 x 15.24 x 10.16 cm),
NEMA 1 thermoplastic

RECEPTACLES: 120 VAC NEMA type 5-15

ALARM HORN: 95 decibels at 2 feet (0.61 meters)

MAXIMUM CURRENT: 15 Amps

Call or fax your order!

1-888-DIAL-SJE (1-888-342-5753) n Fax 218-847-4617

**SJE
Rhombus®**

www.sjrhombus.com
customer.service@sjrhombus.com

9500085B