

Applications

Ideal for applications such as hotels, bars, restaurants, retail stores, lobby areas, and private residences.


Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- Fire Rating: ASTM E 84-03b
- Patterns: Over 35 patterns
- Colors: Over 50 colors
- Made in USA

Installation

- Used on wood substrate.
- Requires plywood, furring strips, or joists.
- Each panel contains a 3/8" nail rail that overlaps tight seams.
- Install by hand nailing, using Cone Head Nails that we sell.
- Install by Brad Nailer, using 18-gauge brad nails. (25 PSI)

Cross Section View:

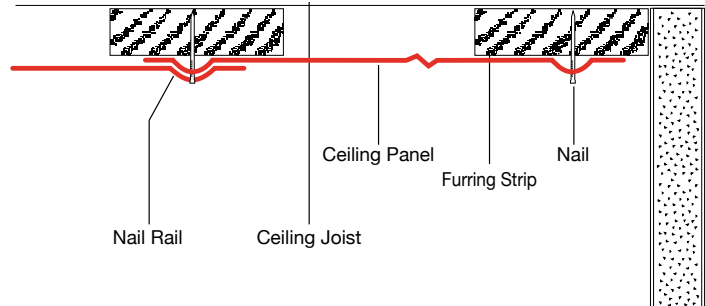


Single Panel View:

(2' x 2')



Multiple Panel View:

(4' x 4')

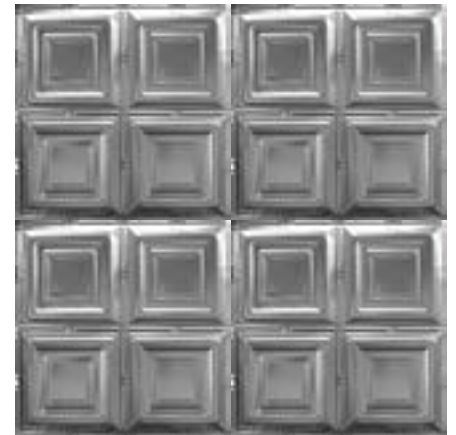

Available Patterns:

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	35	36	37	38	39	F1	F2

Applications

Ideal for applications such as office spaces, lobby areas, restaurants, retail stores, and private residences.


Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- Fire Rating: ASTM E 84-03b
- Patterns: Over 40 patterns
- Colors: Over 50 colors
- Made in USA

Installation

- Sits flush in grid system.
- Fits standard 1⁵/₁₆" grid system on 24" centers.
- Panels also available for 9/₁₆" grid system on 24" centers.
- Cross tees are available to convert 2' x 4' grid systems.
- Simply paint suspended grid system to match tile color.
- Our proprietary Drop-In Clips secure your tiles in place.
- For international orders: also available in metric version. These fit standard 24mm grid system on 600mm centers.

Cross Section View:

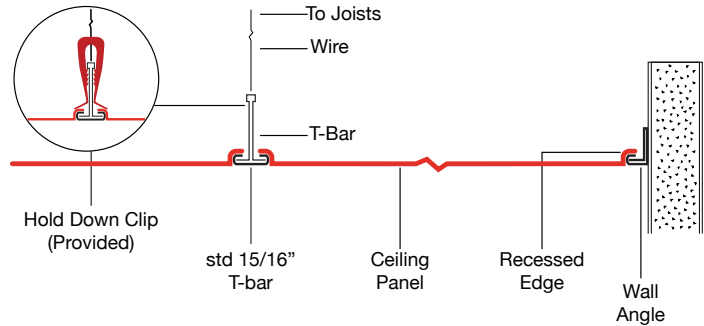


Single Panel View:

(2' x 2')



Multiple Panel View:

(4' x 4')

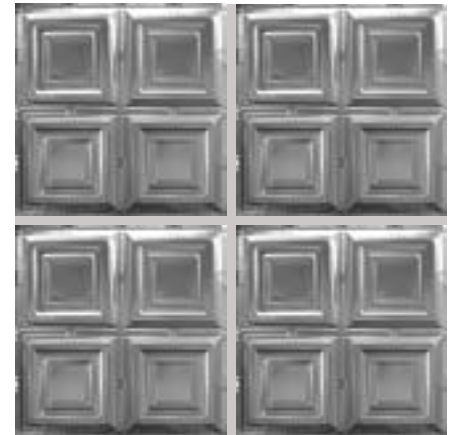

Available Patterns:

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	F2/F2

Applications

Ideal for applications such as hotels, bars, restaurants, retail stores, lobby areas, and private residences.


Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- Fire Rating: ASTM E 84-03b
- Patterns: Over 30 patterns
- Colors: Over 50 colors
- Made in USA

Installation

- Used on plaster, drywall, cement or popcorn ceilings.
- No plywood required.
- No adhesive required.
- Screws directly into drywall.
- Each tile interlocks to the next using our patented flange system.
- You must start in a corner and install one row at a time.
- Leaves a nice butting seam and no visible fasteners.
- Patented design

Cross Section View:

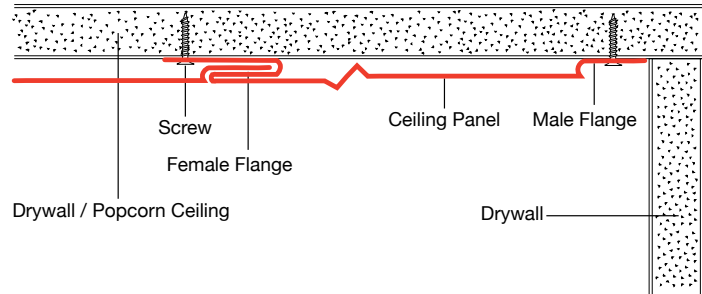


Single Panel View:

(2' x 2')



Multiple Panel View:

(4' x 4')

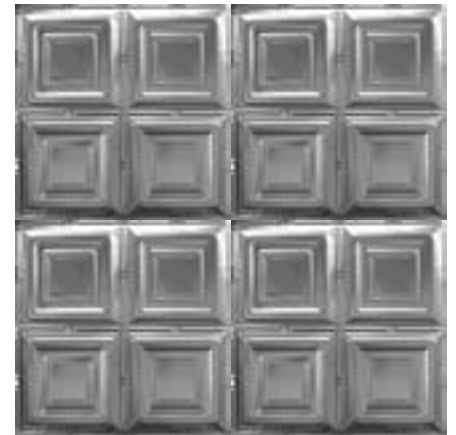

Available Patterns:

1	2	3	4	5	6	8	10	11	12
13	14	16	17	18	19	20	21	22	23
24	25	26	27	28	29	30	31	32	36
37	38	39							

Applications

Ideal for applications such as bars, open-concept restaurants, and private residences.

Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- Fire Rating: ASTM E 84-03b
- Patterns: Over 10 patterns
- Colors: Over 50 colors
- Made in USA



Installation

- Original installation method used for 150 years.
- Each panel contains a 3/8" nail rail that overlaps tight seams.
- Apply to wall with a construction adhesive like Liquid Nails or Power Grab by Loctite.
- When installing onto dry-wall, use a combination of nails and construction adhesive. The nails keep panels tight to the wall while the adhesive dries. This combination provides best results.

Single Panel View (2' x 2')



Available Patterns:

3	17	19	20	21	27	30	31	35	36
37	39								

Applications

Ideal for applications such as hotels, bars, restaurants, casinos, office spaces, retail stores, lobby areas, and private residences.


Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- TYP Hole Size: 0.026" (0.66mm)
- Distance: 0.207" on straight centers
- NRC: 0.25 tile only, 0.85 tile backed with Acoustical Pad
- Tolerance: +/- 1/64" on length and width
- Fire Rating: ASTM E 84-03b
- Patterns: Over 30 patterns
- Colors: Over 50 colors
- Made in USA


Installation

- Used on wood substrate.
- Requires wood grid on 24" centers in both directions to provide space for acoustical pads. A 2" x 4" wood stud grid will be sufficient.
- Requires plywood, furring strips, or joists.
- Each panel contains a 3/8" nail rail that overlaps tight seams.
- Install by hand nailing, using Cone Head Nails that we sell.
- Install by Brad Nailer, using 18-gauge brad nails. (25 PSI)

Wood Grid System View:

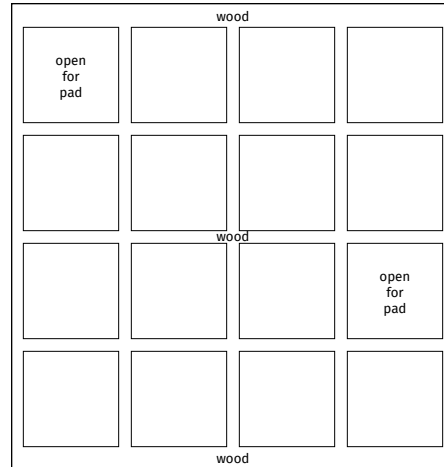

Cross Section View:




Single Panel View:

(2' x 2')



Multiple Panel View:

(4' x 4')

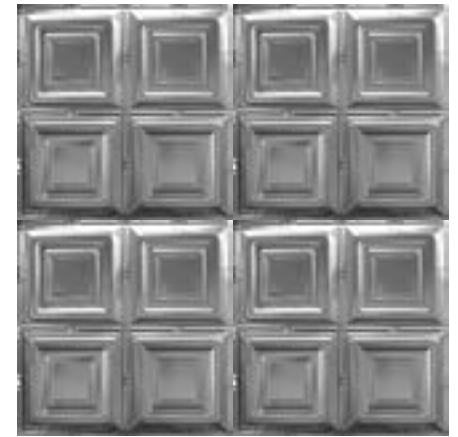

Available Patterns:

1	2	3	4	5	6	8	10	12	14
16	17	18	19	20	21	23	24	25	27
30	31	32	35	36	37	38			

Applications

Ideal for applications such as office spaces, lobby areas, restaurants, retail stores, and private residences.


Features & Benefits

- Material: T1 grade tin-plated steel
- Size: 24" x 24"
- Thickness: 0.010"
- TYP Hole Size: 0.026" (0.66mm)
- Distance: 0.207" on straight centers
- NRC: 0.25 tile only, 0.85 tile backed with Acoustical Pad
- Tolerance: +/- 1/64" on length and width
- Fire Rating: ASTM E 84-03b
- Patterns: Over 30 patterns
- Colors: Over 50 colors
- Made in USA

Installation

- Sits flush in grid system.
- Fits standard 15/16" grid system on 24" centers.
- Panels also available for 9/16" grid system on 24" centers.
- Cross tees are available to convert 2' x 4' grid systems.
- Simply paint suspended grid system to match tile color.
- Our proprietary Drop-In Clips secure your tiles in place.
- For international orders: also available in metric version. These fit standard 24mm grid system on 600mm centers.


Cross Section View:

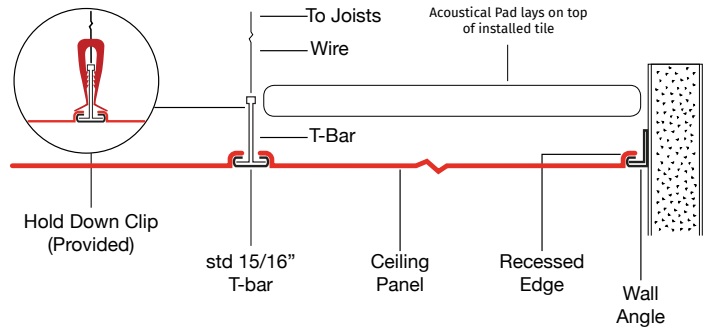

Single Panel View: (2' x 2')



Multiple Panel View: (4' x 4')

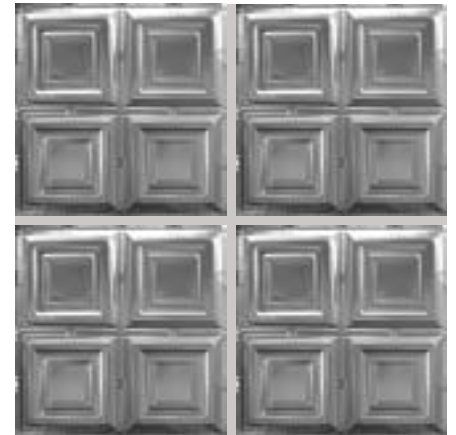

Available Patterns:

1	2	3	4	5	6	10	12	14	16
17	18	19	20	21	23	24	25	27	30
31	32	35	36	37	38				