



LIBERTY / NITRO MIRROR COVER




A




B



1

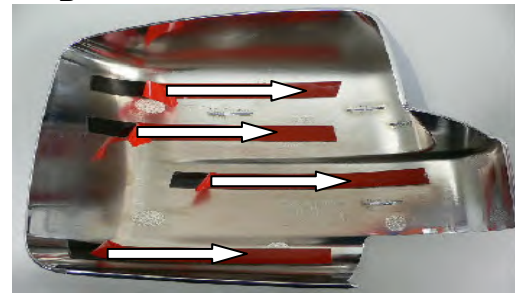

2

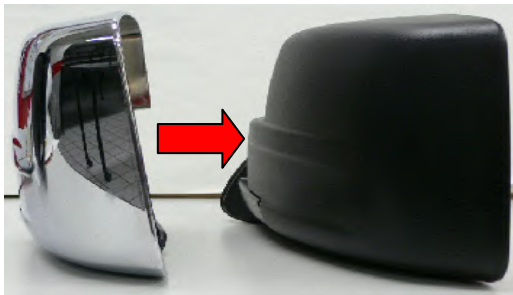

3

Push and Hold
Firmly for 30
seconds at
30 PSI.



4




Lip of Shell Should Show
Uniform at $\leq .25$ in (6mm)

5



6



110°F (43.3°C)

60°F (15.6°C)

Only Install on Dry Mirror
within the Recommended
Temperature Range

K6860460



8/03/2009