


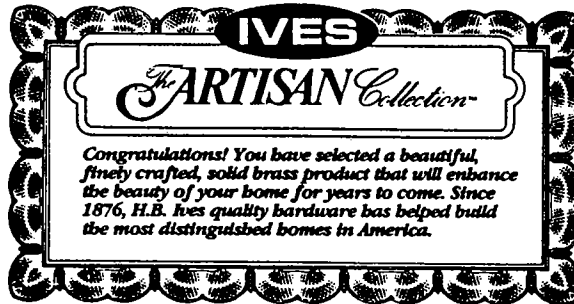

FLUSH PULL


FOR USE ON SLIDING DOORS, FOLDING DOORS, AND WINDOWS.
Provides easy opening of doors and windows.

INSTALLATION INSTRUCTIONS

TOOLS REQUIRED: Drill, 1" spade bit, chisel and Phillips screwdriver.

FOR DOOR INSTALLATION

1. Position pull approximately 1" from edge of door (facing in) and approximately 1/2 way up from floor. Mark top of pull with tape.
2. Measure down from tape 7/8" and 1 7/16" on vertical line and mark hole centers.
3. Drill two 1" holes 1/2" deep. Chisel remaining wood between holes to same depth.
4. Position and secure.



FOR WINDOW INSTALLATION -

1. Position pulls equally spaced on lower rail of bottom window and follow same instructions, except install horizontally.

MAINTENANCE INSTRUCTIONS

H.B. Ives Solid Brass products have a clear, protective lacquer coating which helps prevent discoloration. Do not use abrasive waxes or cleaners.

ASK FOR OTHER FINE DECORATIVE HARDWARE BY H.B. IVES



WINDOW
LOCKS



DOOR
STOPS



COAT &
HAT HOOKS



DOOR
BOLTS



FLUSH PULL C22 B3 BRT

MADE IN U.S.A.