

KT-300 Two-Reader Controller

Features That Make a Difference:

- Controls two readers and easily links to a network
- Update firmware directly from system workstation
- Fast operation, up to 115,200 baud
- Ready to go, no DIP switches or jumpers to set
- Interfaces with an external alarm system
- Choice of 128K or 512K memory capacities
- LEDs provide important controller status and diagnostic information



Scalable Two-Reader Door Controller

The KT-300 is a two-reader networkable door controller. One controller supports up to two readers, installed on two separate doors or on a single door controlling both entry and exit. Each controller is linked to the others in the system using an RS-485 communication bus providing control for up to a million doors depending on the EntraPass Edition.

Easy Firmware Updates

The KT-300 features flash memory for easy firmware updates. The controller's firmware can be updated from any EntraPass workstation in just a few minutes. Flash memory saves time by allowing system updates from a PC without having to update each controller individually.

Speed Selection and Trouble/Reporting

KT-300 detects the system's communication speed (set by EntraPass) and assigns the controller's address, eliminating the need to set up DIP switches or jumpers. KT-300 also provides trouble reporting, constantly supervising locking devices for short and open circuits to detect lock failures. It also monitors battery condition to alert the system of low battery/no battery status. All power outputs are individually protected against short circuits and surges by a self-resetting PTC.

Expandable

The KT-300 can be expanded via Combus expansion modules allowing for relay, input and output modules, and an LCD time and date display.

Status Indicators

LEDs provide important controller status and diagnostic information. The KT-300 has multiple LED indicators for: communication status, troubleshooting, network activity, power status and outputs activity.

External Alarm Interface

The KT-300 can interface with an external intrusion alarm system. An authorized individual can arm or disarm the alarm system simply by presenting their card to a reader.

Network Connectivity

The KT-IP (IP controller module) provides affordable and secure LAN/WAN network connectivity for the KT-300 door controller. In this setup, the KT-300 is first connected to a VC-485 (RS-232/RS-485 interface). Then the VC-485 is connected to the KT-IP (and both devices are powered by the KT-300). The KT-IP relays information between the KT-300 and the EntraPass Multi-Site Gateway.

Physical

Dimensions 29.9 x 28.8 x 7.7 cm (11.75 x 11.38 x 3.0 in)
 Knock Out Dimensions 1.9 cm (0.8 in)
 Weight (with metal cabinet) 2.4 kg (5.4 lbs)

Environmental

Operating Temperatures 2° to 40°C (35° to 104°F)

Electrical

Input Power 16 VAC, 40 VA, Class 2 transformer
 Battery Backup One battery 12V/7Ah, supervised, provides operation for up to 12 hours
 Auxiliary Outputs (LED, BUZ) Four outputs, 25 mA max. each, open collector
 Control Relay Outputs (R1, R2) Two control relay outputs, 12 VDC, 25 mA totals each, open collector (optional relay KT-RM1 available)
 Auxiliary Power Output 11.1 VDC to 13.8 VDC @175 mA maximum, protected and supervised
 Reader Power Outputs 12 VDC and 5 VDC @125 mA total, protected and supervised
 Door Strike Power 12 VDC, 250 mA each, supervised

Operational

Compatible Reader Types Wiegand, proximity, bar code, magnetic, integrated keypad, and others
 Monitored Points (Inputs) Eight monitored points, NO/NC, with or without end-of-line resistors (expandable to 16)
 Max. Wiring Distance 600 m (2,000 ft) – (AWG #22)
 Communication Ports RS-232, RS-485, and Combus
 Communication Speed Up to 115,200 baud (automatic detection)
 Firmware Flash Memory 128K
 RAM 128K or available 512K, protected by a lithium battery
 Network Autonomy Distributed data and processing

Regulatory

Certifications UL 294, CE, FCC

Model Numbers

Door Controllers

KT-300/128K KT-300 two-door controller, 128KB memory, accessory kit (KT-300-ACC), metal cabinet (KT-300CAB) with lock (KT-LOCK)
 KT-300/512K KT-300 two-door controller, 512KB memory, accessory kit (KT-300-ACC), metal cabinet (KT-300CAB) with lock (KT-LOCK)
 KT-300PCB128 KT-300 two-door controller PCB only, 128KB memory, accessory kit (KT-300-ACC)
 KT-300PCB512 KT-300 two-door controller PCB only, 512KB memory, accessory kit (KT-300-ACC)

Expansion Modules

KT-PC4108 8-zone programmable input expansion module
 KT-PC4204 4-relay output and Combus power supply module
 KT-PC4216 16-zone programmable output expansion module


Accessories

KT-300-ACC KT-300 accessory kit, includes: two 1.0K ohm, ten 5.6K ohms, two 120 ohms end-of-line resistors, PCB standoff, lock hole cover, ground wire and screwdriver
 KT-RM1 External isolation relay, single pole, double through (SPDT) for output RL1/RL2
 KT3-LCD LCD time and date display
 KT-300CAB Black metal cabinet with lock (KT-LOCK)
 KT-4051CAB Black metal cabinet for KT-300 expansion modules. Order KT-LOCK separately.
 KT-LOCK Lock for KT-300-CAB & KT-4051-CAB, metal cabinets, 2 keys
 KT-300FLASH Replacement firmware
 KT-TAMPER Tamper switch for KT-300-CAB & KT-4051CAB metal cabinets

Power Supplies

TR1637W/CSA AC transformer, wire-in, 110V/16V (37 VA) CSA
 TR1640P/CSA AC transformer, plug-in, 110V/16V (40 VA) CSA
 TR1640P/UL AC transformer, plug-in, 110V/16V (40 VA) UL
 TR1640W-220 AC transformer, wire-in, 220V/16V (40 VA) CE

Basic System Diagram

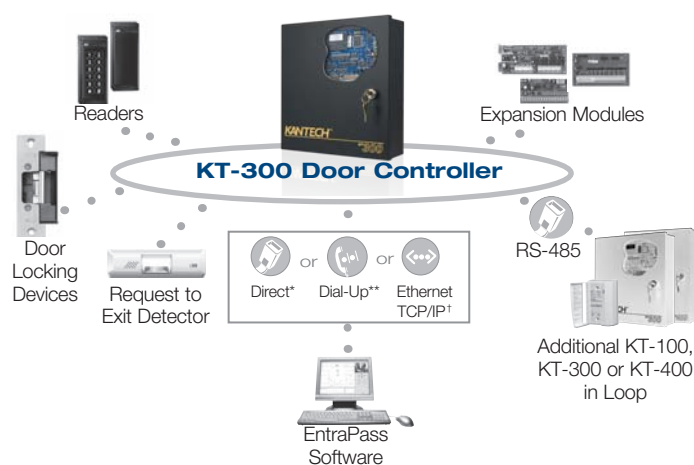

* Direct via RS-232 or RS-485 with USB-485 or VC-485 converters

** Dial-up: Using RS-232 serial modem at remote site

† Ethernet TCP/IP: Using Lantronix Universal Device Server, or using Kantech IP Link with EntraPass Special Edition/Corporate Edition/Global Edition. A Multi-Site Gateway is required with EntraPass Global Edition

Related Products



EntraPass
Security Software



KT-PC4216 16-zone
output module



KT-PC4204 4-relay output
& power supply module

Approvals



www.kantech.com

The trademarks, logos, and service marks displayed on this document are registered in the United States [or other countries]. Any misuse of the trademarks is strictly prohibited and Tyco International Ltd. will aggressively enforce its intellectual property rights to the fullest extent of the law, including pursuit of criminal prosecution wherever necessary. All trademarks not owned by Tyco International Ltd. are the property of their respective owners, and are used with permission or allowed under applicable laws.

Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative.
 © 2011 Tyco International Ltd. and its respective companies. All rights reserved. KT0137-DS-201108-R02-A4-EN