


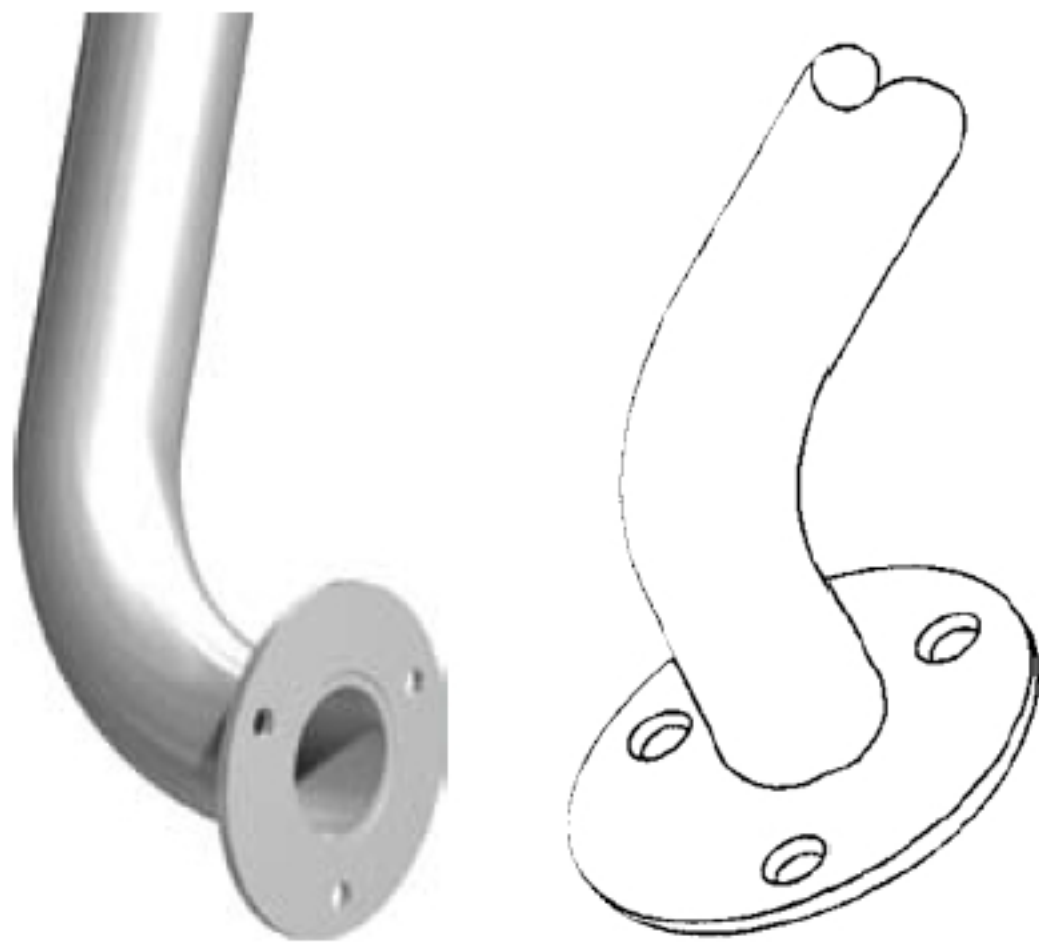


EXPOSED MOUNTING

3400 Series — 1 1/4" (32 mm) O.D.

3500 Series — 1 1/2" (38 mm) O.D.

- Flange is 3" (76 mm) diameter, 1/8" (3 mm) thick type 304 stainless steel with a satin finish.
- Exposed mounting screw holes are drilled and countersunk.

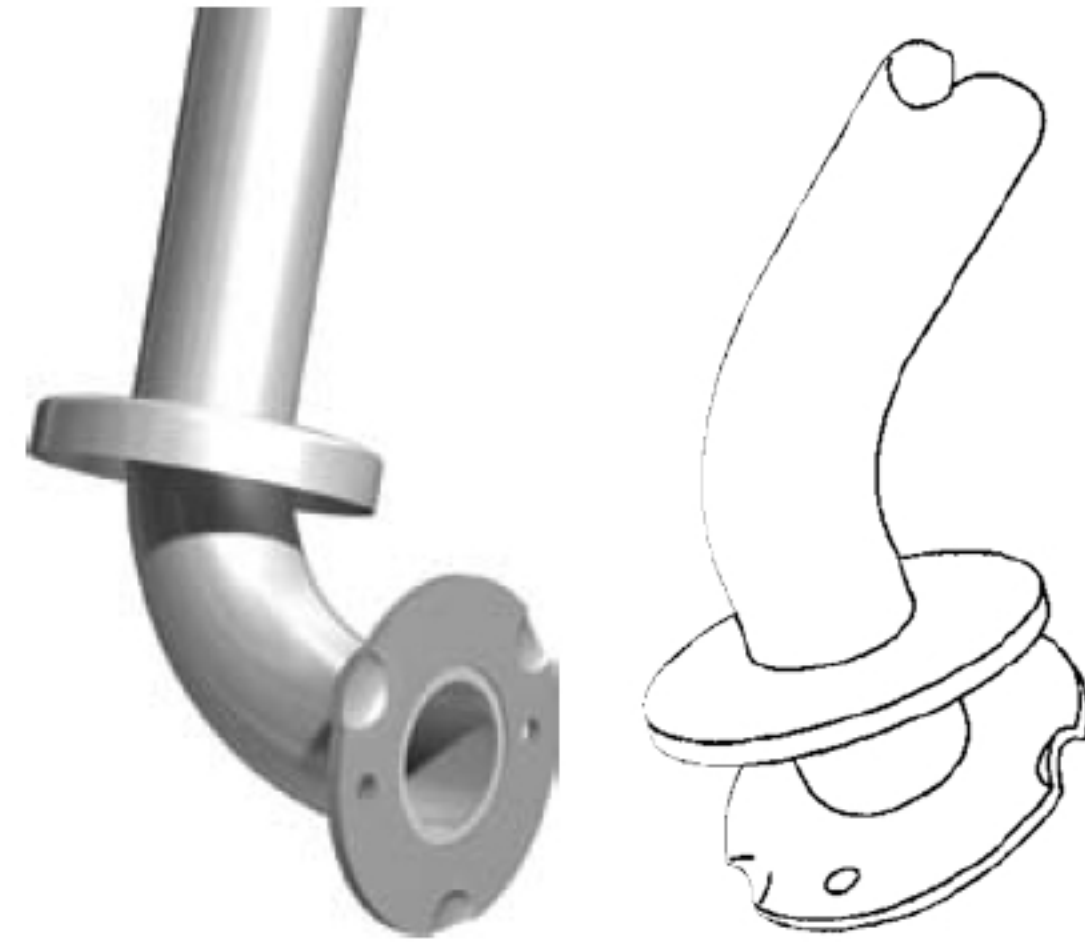


SNAP FLANGE


3700 Series — 1 1/4" (32 mm) O.D.

3800 Series — 1 1/2" (38 mm) O.D.


- Cover snaps over mounting flange dimples to conceal screws.
- Concealed mounting flange is 3 1/8" (79 mm) O.D. diameter with two screw holes and three locking dimples and is 1/8" (3 mm) thick, type 304 stainless steel.
- Cover is type 304 stainless steel with satin finish, 22 gauge, 3 3/16" (81 mm) diameter.

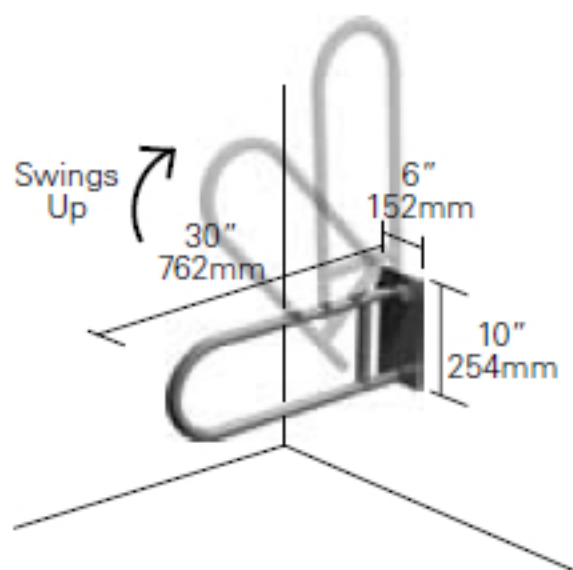


Type - 13

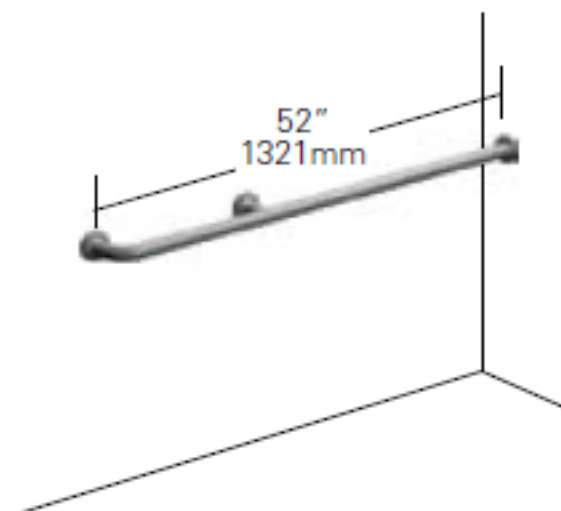


Type - 24

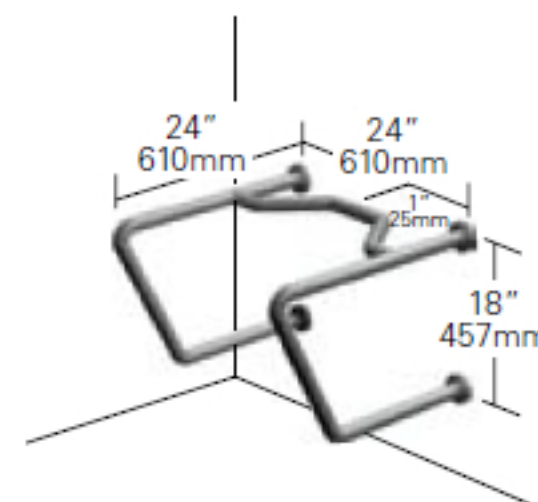


Type - 34

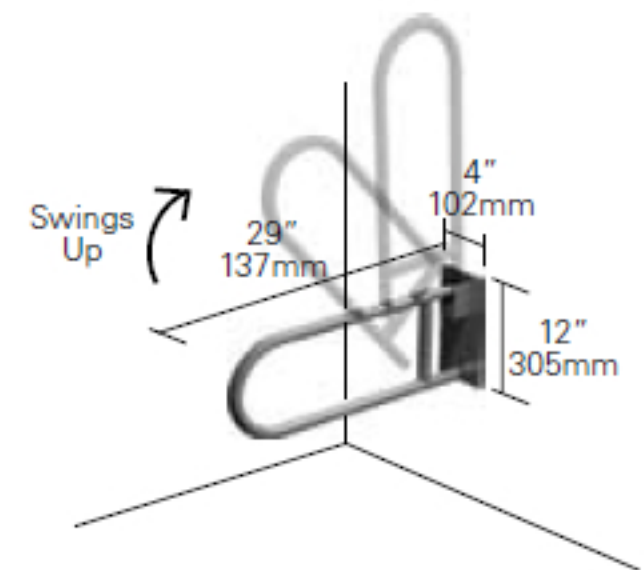

Type - 51

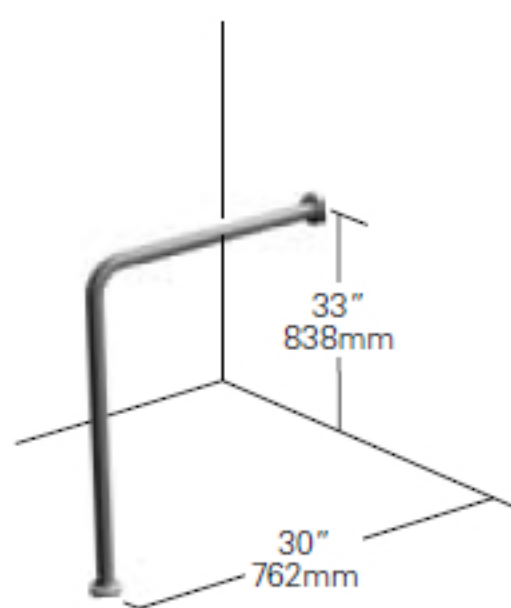


Type - 15

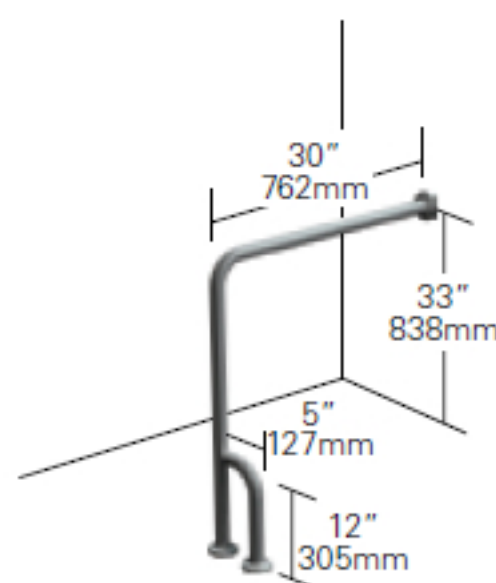


Type - 33

Right hand shown,
left hand opposite

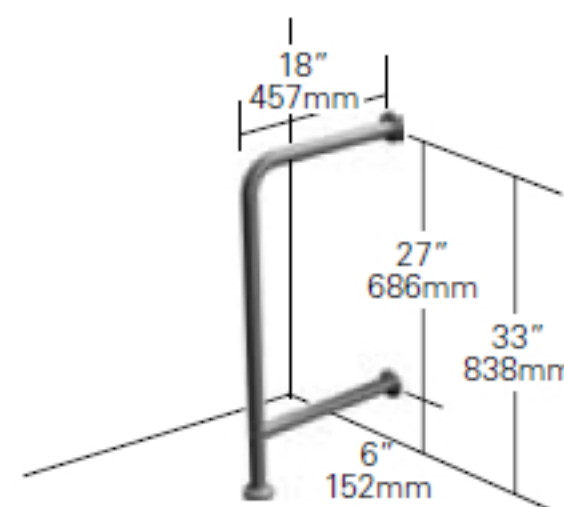

Type - 75

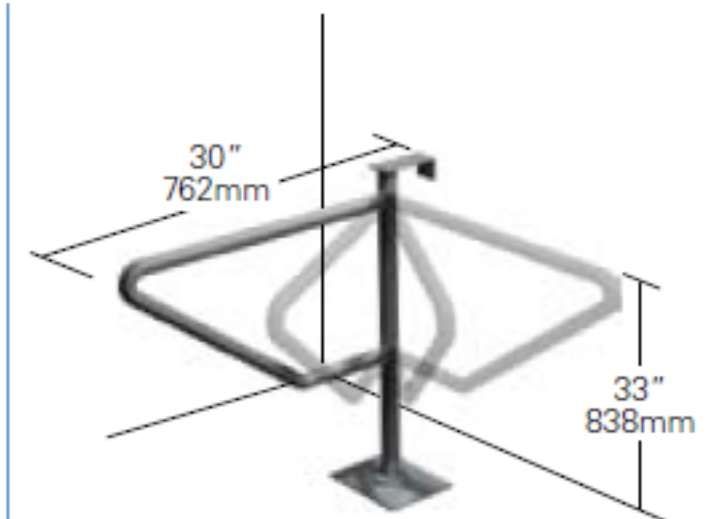

Type - 54