



BACKSET:
MIN. .625 (15,8)
MAX. 1.281 (32,5)

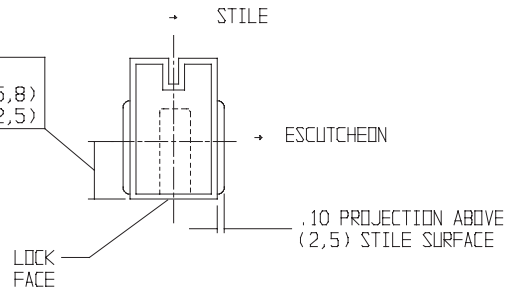


4

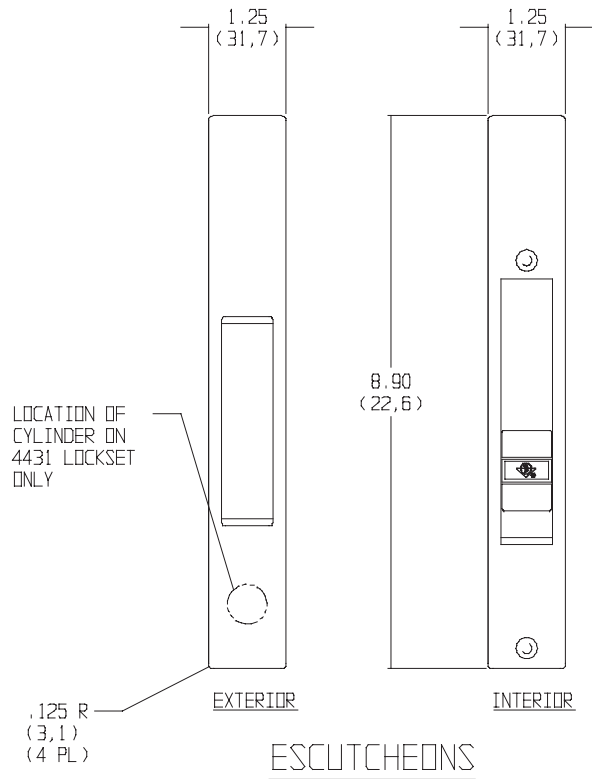

ESCUTCHEONS

NOTE: STANDARD UNIT SUITABLE FOR STILE THICKNESS 1.0 (25,4) MIN. TO 1.37 (37,7) MAX. SPECIAL ORDER UNITS AVAILABLE FOR STILES UP TO 2.0 (50,8) THICK. SPECIFY EXACT STILE THICKNESS.

3

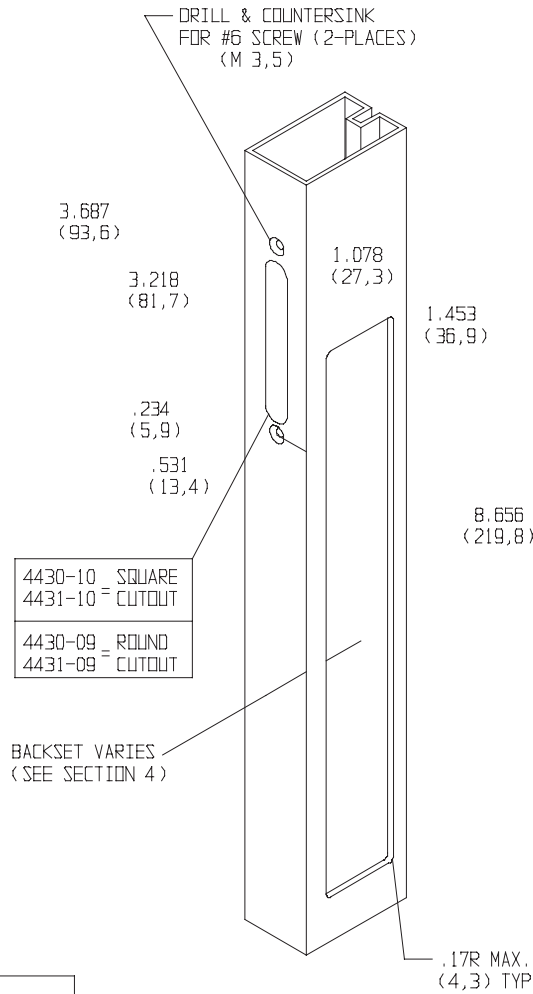


2

STILE PREPARATION

RELATED HARDWARE & ACCESORIES

1. SEE 1848 DRAWING FOR DETAILS OF LOCK MECHANISM USED IN THESE LOCKSETS.
2. MATCHING "DUMMY" SET 4432 (NO DEADLOCK INCLUDED)

4431-09 FLUSH LOCKSET SHOWN

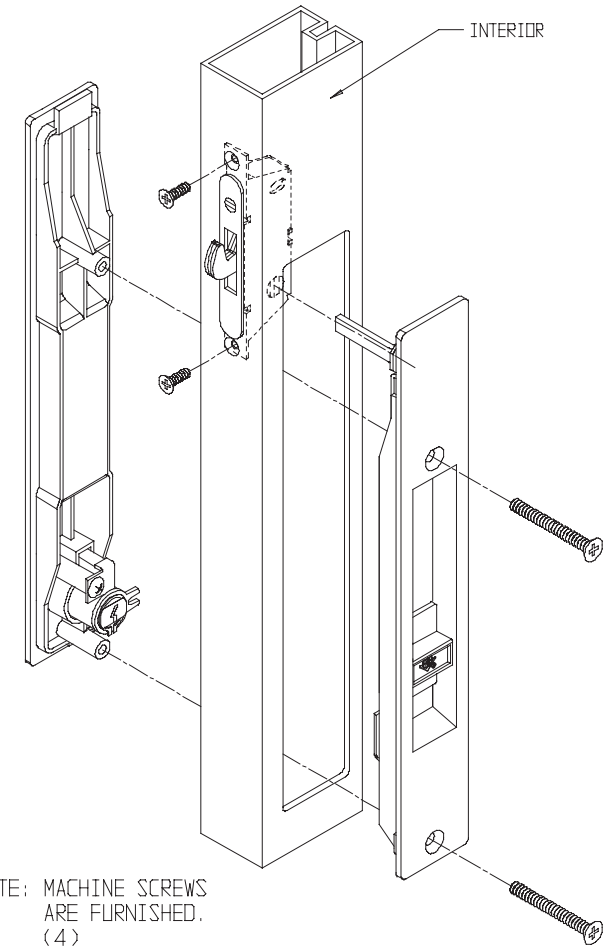

NOTE: MACHINE SCREWS ARE FURNISHED. (4)

INSTALLATION

1

DATE: REDRAWN W/O CHANGE 10-11-96

80-0180-18

ECN: 9494

ADAMS RITE MANUFACTURING CO.

4430 & 4431 FLUSH LOCKSETS