

INVERTED V-BLADE LOUVER: 600 SERIES

L1


Inverted "V" Blades with 60% Free Area - Recommended for Schools, Class "A" and Institutional Buildings



SPECIFICATIONS:

Material:	20 gauge CRS frame and louvers. Min size 6" x 4", max 24" x 80". Multiple sections can be combined for larger sizes
Construction:	Louvers: Inverted "V" blades with 1/2" blade spacing are attached by interlocking construction to a 1" deep, welded frame. Non-vision. 600A1 Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.
Door:	_____ 1-3/4" - Any Model Door cutout = order size. _____ 1 3/8"-1 3/4" - 600CORE, 600C, 600A
Mounting Options:	_____ Select one mounting option from table below.
Fasteners:	Phillips head screws #8 x 3/4" to match finish.
Powder Coat Finishes:	_____ (B) Mineral Bronze (standard color) _____ (G) Gray _____ (BK) Black _____ (FBK) Flat Black _____ (W) White _____ (SB) SC Beige _____ (SA) Satin Aluminum _____ (S) Sand _____ (AB) AMS Beige _____ (R) Red _____ (GH) Gray Hammertone Color Samples Online
Free Flow Area:	60% free area.

600A1
Photo &
Drawing

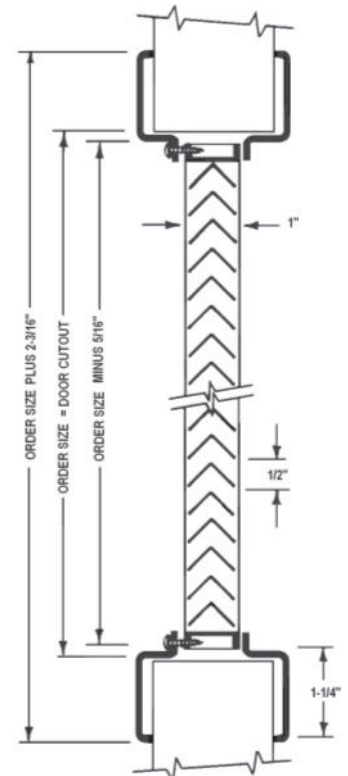

**SELF-
ATTACHING
FRAME**

OPTIONAL FEATURES AT ADDITIONAL COST:

Finishes & Materials:	_____ (S) 20 gauge stainless steel, #4 finish _____ 16 gauge CRS _____ (G) Galvanized sheet for exterior use and corrosion-resistance _____ (EG) Electro Galvanized for corrosion resistance & exterior use _____ Special order colors. Please provide color chip.
Fasteners:	_____ Torx _____ Hex head _____ Other: _____
Screen:	_____ 18x14 mesh insect screen installed in roll-formed aluminum frame. _____ aluminum _____ bronze _____ fiberglass _____ stainless _____ Bird Screen.
Custom:	Custom sizes, other door thickness, other options; Contact Cust. Service.

DOOR MOUNTING OPTIONS - SELECT ONE

600A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" door only.	
600 CORE: Basic blade unit only; for interior door or as transom louver held in place with wood or metal moulding (furnished by others); fits any size door.	
600C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal moulding (by others) used on opposite side; fits any size door.	
600A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

Order Format: **600**
Example: 600AS 1212B A,A1,CORE,C Option S,G,EG W H Color



Distributor:	Width: _____ x Height: _____
Architect:	Quantity:
Contractor:	Model:
Project:	Date: Version: ALPDS1105

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@AIRLOUVERS.COM Fax: 952-835-2218
VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY
MANUFACTURING: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA