2 Rows of Inverted, Split "Y" Blades with Two-Piece Design for Wood or Metal Doors




SPECIFICATIONS:

Material:	18 gauge CRS frame and blades. Min size 6" x 4", Max 48" x 80". Multiple sections can be combined for larger sizes		
Construction:	Louvers & Frame: 2 rows of inverted split "Y" blades at 1" intervals are attached by interlocking construction to the 3/4" deep welded frame. 1-1/4" trim, with mitered and welded corners and countersunk mounting holes. Non-vision Construction. Louver frame is screwed into door from 2 sides.		
Door:	Minimum 1-3/8" thick door.	Door cutout = order size.	
Fasteners:	Phillips head screws #8 x 3/4" to match finish.		
Powder Coat Finishes:	(B) Mineral Bronze(G) Gray (stock colors)(BK) Black(FBK) Flat Black(W) White(SB) SC Beige(SI) Silver(S) Sand(AB) AMS Beige(R) Red(GH) Gray Hammertone Color Samples Online		
Free Flow Area:	50% free area.		

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	 (S) 18 gauge stainless steel, #4 finish 16 gauge CRS. (J) Galvanneal sheet for exterior use and corrosion-resistance (E) Electro Galvanized for corrosion resistance & exterior use.
Screen:	18 x14 mesh insect screen installed with rivets or screws aluminum bronze fiberglass stainless Bird Screen.
Custom:	Custom sizes, other door thickness, other options; Contact Customer Service.

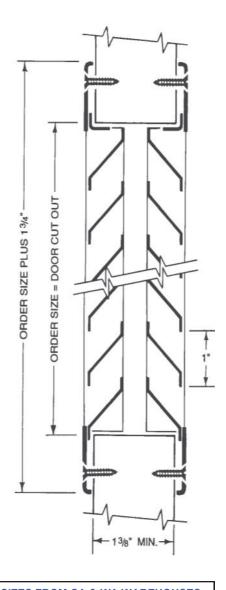

STOCK ITEM— THIS ITEM IN STOCK FOR NEXT DAY SHIPMENT IN SEVERAL STANDARD SIZES FROM CA & WA WAREHOUSES

Order Format:	700			
Example: 700A 1212B	Option S,J,E	W	Н	Color

- AID	Distributor:	Width:x Height:
AIK	Architect:	Quantity:
LOUVERS	Contractor:	Model:
	Project:	Date: Version: ALPDS1404

800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218

VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY

MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX