



Selector Valve Pneumatic Actuation Line Kit


Description

The Selector Valve Pneumatic Actuation Line Kit (Part No. 436127) is used to control the pressure in the actuation lines of the selector valves. One selector valve pneumatic actuation line kit is required for each Pneumatic Actuator (Part No. 428566) and must be installed within 1 ft (0.3 m) of the actuator/isolation valve.

The Low Pressure Vent Plug (Part No. 436085) and Safety Relief Valve (Part No. 15677) are to be installed with a torque of 125 in.-lb (14 N m).

After system discharge, all pressure in the actuation line must be relieved by pulling the ring on the safety relief valve.

Component	Material	Approvals
Low-Pressure Vent Plug	Brass	UL Listed (EX-4510); Listed for use with FM Approved systems
Safety Relief Valve	Brass	UL Listed (EX-4510); Listed for use with FM Approved systems
1/4 in. Close Nipple	Galvanized Steel	UL Listed (EX-4510); Listed for use with FM Approved systems
1/4 in. Tee	Galvanized Steel	UL Listed (EX-4510); Listed for use with FM Approved systems

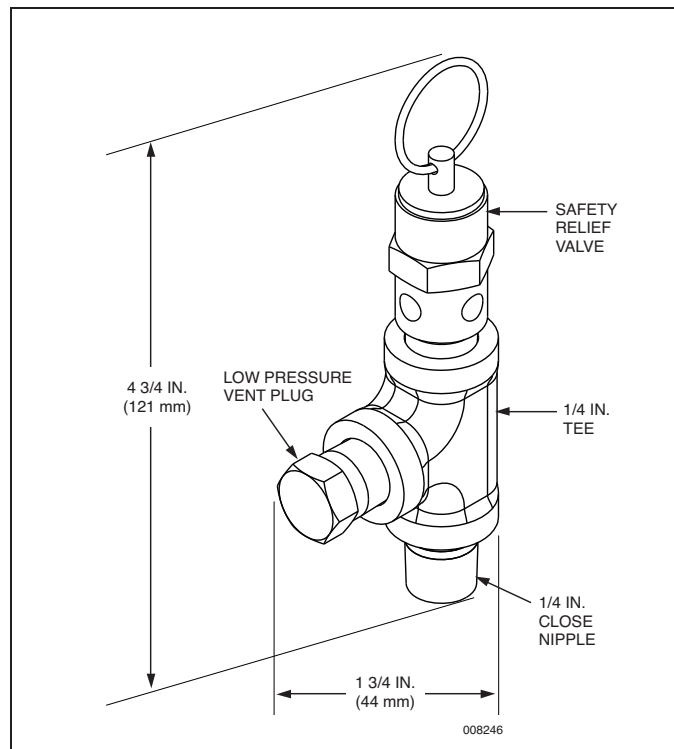

Shipping Assembly Part No.	Description
436127	Selector Valve Pneumatic Actuation Line Kit
436085	Low Pressure Vent Plug
15677	Safety Relief Valve
28484	1/4 in. Close Nipple
27350	1/4 in. Tee

Note: The low pressure vent plug cannot be ordered separately.