


# Tear Off and Position on Door

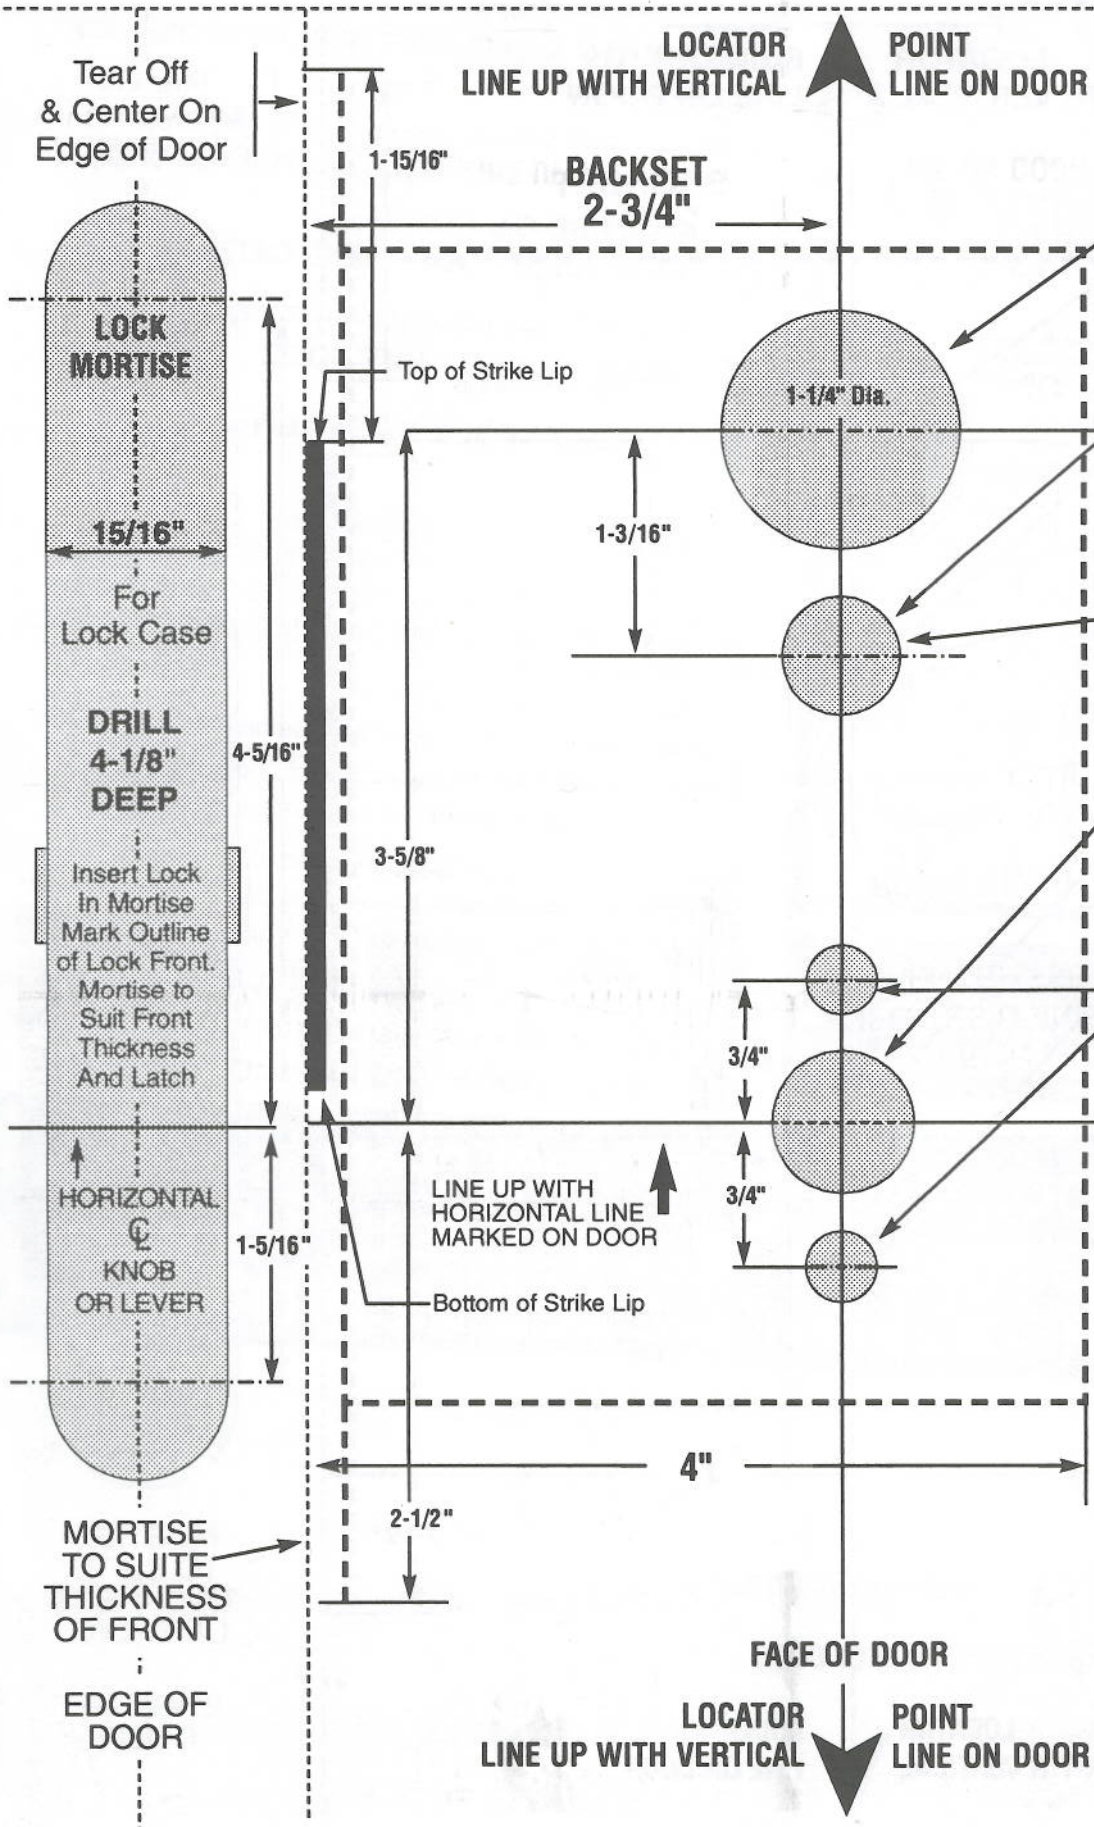

**CYLINDER HOLE**  
Drill ONLY if you have Cylinder on this side of door.

**Turnpiece HOLE**  
Drill ONLY if you have Turnpiece on this side of door.  
**5/8" Diameter**

**INDICATOR HOLE**  
Drill ONLY if you have Indicator on this side of door.  
**5/8" Diameter**

**Knob & LEVER Hole**  
Drill ONLY if you have Knob or Lever on this side of door.  
**3/4" Diameter**

**THRU BOLT HOLES**  
Drill ONLY if you have Knob or Lever on this side of door.  
**3/8" Diameter**

**HORIZONTAL  $\phi$  of KNOB or LEVER**  
Mark Door Desired Height Above Finished Floor

When using door silencers or weather stripping, compensation must be made to insure proper latch and strike engagement.

**FOR OPPOSITE SIDE OF DOOR, TURN TEMPLATE OVER**



325 Duffy Avenue  
Hicksville, NY 11801  
Phone: 516-704-2700  
800-233-0478  
Fax: 516-704-2792  
**ARROW CANADA:**  
2384 Dunwin Drive  
Mississauga, Ontario L5L1J9  
Phone: (905) 820-4411  
Fax: (905) 820-4492  
AM203